


BSPP MALE - 60° CONE (1)


MASCHIO BSPP SV 60°
 MÂLE BSPP CÔNE 60°
 AGR 60° INNENKONUS (BSPP GEWINDE)
 MACHO FIJO BSPP CONO 60°

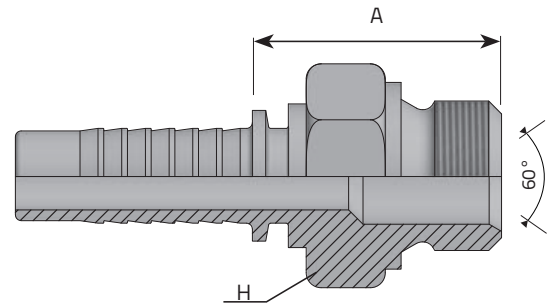

	Code	Tube		Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch		mm	Inch		mm	mm		
	MG0302	-3	3/16"	4.8	1/8"	28	14	20.5	350	5076
	MG0304	-3	3/16"	4.8	1/4"	19	19	26	415	6019
	MG0402	-4	1/4"	6.4	1/8"	28	14	20.5	350	5076
	MG0404	-4	1/4"	6.4	1/4"	19	19	27	450	6526
	MG0406	-4	1/4"	6.4	3/8"	19	22	29	450	6526
	MG0408	-4	1/4"	6.4	1/2"	14	27	32	450	6526
	MG0504	-5	5/16"	7.9	1/4"	19	19	27	350	5076
	MG0506	-5	5/16"	7.9	3/8"	19	22	29	350	5076
	MG0508	-5	5/16"	7.9	1/2"	14	27	32	350	5076
	MG0604	-6	3/8"	9.5	1/4"	19	19	27	450	6526
	MG0606	-6	3/8"	9.5	3/8"	19	22	29	450	6526
	MG0608	-6	3/8"	9.5	1/2"	14	27	32	450	6526
	MG0806	-8	1/2"	12.8	3/8"	19	22	29	415	6019
	MG0808	-8	1/2"	12.8	1/2"	14	27	33	415	6019
	MG0810	-8	1/2"	12.8	5/8"	14	30	34.5	415	6019
	MG0812	-8	1/2"	12.8	3/4"	14	32	36	415	6019
	MG1008	-10	5/8"	16	1/2"	14	27	33	350	5076
	MG1010	-10	5/8"	16	5/8"	14	30	34.5	350	5076

BSPP MALE - 60° CONE (2)


MASCHIO BSPP SV 60°
 MÂLE BSPP CÔNE 60°
 AGR 60° INNENKONUS (BSPP GEWINDE)
 MACHO FIJO BSPP CONO 60°

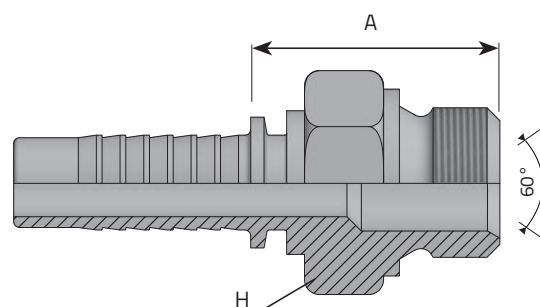

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
		Inch	mm	Inch		mm	mm			
MG1012	-10	5/8"	16	3/4"	14	32	36		350	5076
MG1016	-10	5/8"	16	1"	11	38	40		350	5076
MG1208	-12	3/4"	19	1/2"	14	27	34		350	5076
MG1210	-12	3/4"	19	5/8"	14	30	36		350	5076
MG1212	-12	3/4"	19	3/4"	14	32	37		350	5076
MG1216	-12	3/4"	19	1"	11	38	40		350	5076
MG1612	-16	1"	25.4	3/4"	14	32	38		280	4061
MG1616	-16	1"	25.4	1"	11	38	40		280	4061
MG1620	-16	1"	25.4	1.1/4"	11	50	45		280	4061
MG2020	-20	1.1/4"	31.8	1.1/4"	11	50	46		210	3046
MG2024	-20	1.1/4"	31.8	1.1/2"	11	55	46		210	3046
MG2424	-24	1.1/2"	38.1	1.1/2"	11	55	46		185	2683
MG2432	-24	1.1/2"	38.1	2"	11	70	53		185	2683
MG3232	-32	2"	50.8	2"	11	70	54		165	2393

BSPP SWIVEL MALE - 90° ELBOW (COMPACT FORGED)


MASCHIO COMPATTO 90° BSPP GIREVOLE
MALE 90° BSPP COMPACT
 AGR BSPP 90° KOMPAKT DREHBAR
MACHO BSPP GIRATORIO A 90° COMPACTO

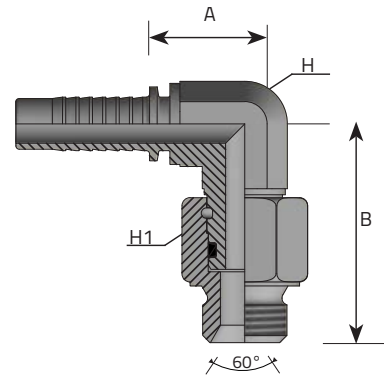

Code	Tube		Thread		Dimensions					Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm	mm		
M90G0404SW	-4	1/4"	6.4	1/4"	19	14	19	45.7	54	350	5076
M90G0606SW	-6	3/8"	9.5	3/8"	19	19	22	57.2	62	350	5076
M90G0808SW	-8	1/2"	12.8	1/2"	14	22	27	64.1	67	350	5076

BSPT TAPERED MALE


MASCHIO BSPT SV 60°
 MÂLE BSPT CÔNE 60°
 AGR-K KONISCH (BSPT)
 MACHO BSPT CONO 60°

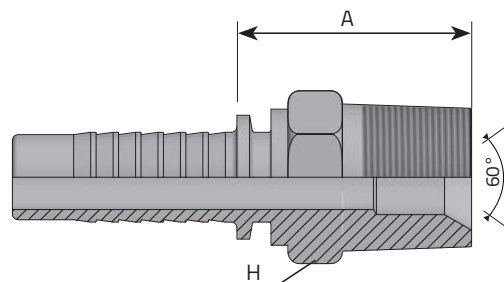

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
		Inch	mm	Inch		mm	mm			
MGK0302	-3	3/16"	4.8	1/8"	28	12	22		350	5076
MGK0304	-3	3/16"	4.8	1/4"	19	15	22		415	6019
MGK0402	-4	1/4"	6.4	1/8"	28	12	22.5		350	5076
MGK0404	-4	1/4"	6.4	1/4"	19	15	27		450	6526
MGK0406	-4	1/4"	6.4	3/8"	19	19	28		450	6526
MGK0504	-5	5/16"	7.9	1/4"	19	15	27		350	5076
MGK0506	-5	5/16"	7.9	3/8"	19	19	28		350	5076
MGK0604	-6	3/8"	9.5	1/4"	19	15	28		450	6526
MGK0606	-6	3/8"	9.5	3/8"	19	19	28		450	6526
MGK0608	-6	3/8"	9.5	1/2"	14	22	34		415	6019
MGK0806	-8	1/2"	12.8	3/8"	19	19	28		415	6019
MGK0808	-8	1/2"	12.8	1/2"	14	22	34.5		415	6019
MGK1008	-10	5/8"	16	1/2"	14	24	34.5		350	5076
MGK1012	-10	5/8"	16	3/4"	14	27	36.5		350	5076
MGK1212	-12	3/4"	19	3/4"	14	27	37		350	5076
MGK1216	-12	3/4"	19	1"	11	36	45		280	4061
MGK1616	-16	1"	25.4	1"	11	36	46		280	4061
MGK1620	-16	1"	25.4	1.1/4"	11	46	45.5		210	3046
MGK2020	-20	1.1/4"	31.8	1.1/4"	11	46	46		210	3046
MGK2024	-20	1.1/4"	31.8	1.1/2"	11	50	47		185	2683
MGK2424	-24	1.1/2"	38.1	1.1/2"	11	50	47.3		185	2683
MGK3232	-32	2"	50.8	2"	11	65	57		165	2393

BSPP FEMALE - 60° CONE (1)


FEMMINA BSPP SV 60°
 FEMELLE DROITE BSPP CÔNE 60°
 DKR 60° KONUS (BSPP-GEWINDE)
 HEMBRA GIRATORIA RECTA BSPP CONO 60°

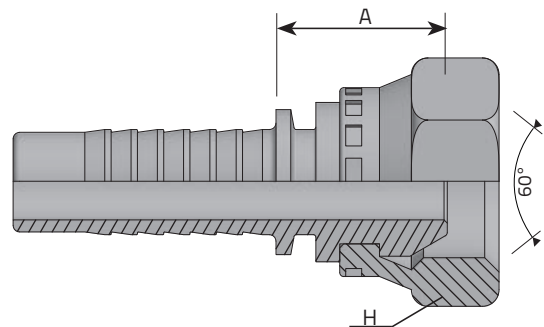

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	Inch		mm	mm		
FDG0302	-3	3/16"	4.8	1/8"	28	15	18	350	5076
FDG0304	-3	3/16"	4.8	1/4"	19	19	18	415	6019
FDG0402	-4	1/4"	6.4	1/8"	28	15	18	350	5076
FDG0404	-4	1/4"	6.4	1/4"	19	19	18	450	6526
FDG0406	-4	1/4"	6.4	3/8"	19	22	19	450	6526
FDG0408	-4	1/4"	6.4	1/2"	14	27	21	450	6526
FDG0504	-5	5/16"	7.9	1/4"	19	19	18	350	5076
FDG0506	-5	5/16"	7.9	3/8"	19	22	19	350	5076
FDG0508	-5	5/16"	7.9	1/2"	14	27	21	350	5076
FDG0604	-6	3/8"	9.5	1/4"	19	19	19	450	6526
FDG0606	-6	3/8"	9.5	3/8"	19	22	20	450	6526
FDG0608	-6	3/8"	9.5	1/2"	14	27	21	450	6526
FDG0806	-8	1/2"	12.8	3/8"	19	19	20	415	6019
FDG0808	-8	1/2"	12.8	1/2"	14	27	22	415	6019
FDG0810	-8	1/2"	12.8	5/8"	14	28	22	415	6019
FDG0812	-8	1/2"	12.8	3/4"	14	32	24	415	6019
FDG1008	-10	5/8"	16	1/2"	14	27	22	350	5076
FDG1010	-10	5/8"	16	5/8"	14	28	23	350	5076

BSPP FEMALE - 60° CONE (2)


FEMMINA BSPP SV 60°
 FEMELLE DROITE BSPP CÔNE 60°
 DKR 60° KONUS (BSPP-GEWINDE)
 HEMBRA GIRATORIA RECTA BSPP CONO 60°

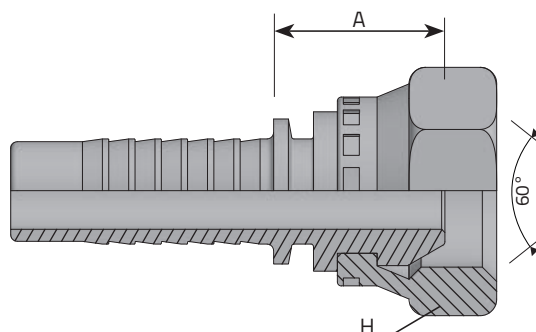

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	Inch		mm	mm		
FDG1012	-10	5/8"	16	3/4"	14	32	24	350	5076
FDG1208	-12	3/4"	19	1/2"	14	27	22.5	350	5076
FDG1210	-12	3/4"	19	5/8"	14	28	24	350	5076
FDG1212	-12	3/4"	19	3/4"	14	32	25	350	5076
FDG1216	-12	3/4"	19	1"	11	38	26	350	5076
FDG1612	-16	1"	25.4	3/4"	14	32	26	280	4061
FDG1616	-16	1"	25.4	1"	11	38	27	280	4061
FDG1620	-16	1"	25.4	1.1/4"	11	50	30	280	4061
FDG2020	-20	1.1/4"	31.8	1.1/4"	11	50	30	210	3046
FDG2024	-20	1.1/4"	31.8	1.1/2"	11	55	32	210	3046
FDG2424	-24	1.1/2"	38.1	1.1/2"	11	55	32	185	2683

BSPP FEMALE - 60° CONE - 90° ELBOW (1)


FEMMINA 90° BSPP SV 60°
 FEMELLE 90° BSPP CÔNE 60°
 DKR 90° BOGEN 60° KONUS (BSPP-GEWINDE)
 HEMBRA GIRATORIA A 90° BSPP - CONO 60°

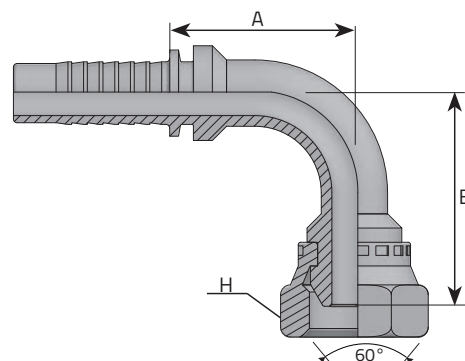

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F90G0302	-3	3/16"	4.8	1/8"	28	15	29	23	350	5076
F90G0304	-3	3/16"	4.8	1/4"	19	19	29	23	415	6019
F90G0402	-4	1/4"	6.4	1/8"	28	15	29	23	350	5076
F90G0404	-4	1/4"	6.4	1/4"	19	19	29	23	450	6526
F90G0406	-4	1/4"	6.4	3/8"	19	22	32	23	450	6526
F90G0408	-4	1/4"	6.4	1/2"	14	27	30	31.5	450	6526
F90G0504	-5	5/16"	7.9	1/4"	19	19	33.5	31.5	350	5076
F90G0506	-5	5/16"	7.9	3/8"	19	22	35.5	31.5	350	5076
F90G0508	-5	5/16"	7.9	1/2"	14	27	39	31.5	350	5076
F90G0604	-6	3/8"	9.5	1/4"	19	19	37	33	450	6526
F90G0606	-6	3/8"	9.5	3/8"	19	22	38	33	450	6526
F90G0608	-6	3/8"	9.5	1/2"	14	27	42	33	450	6526
F90G0806	-8	1/2"	12.8	3/8"	19	22	43	39	415	6019
F90G0808	-8	1/2"	12.8	1/2"	14	27	45	39	415	6019
F90G0810	-8	1/2"	12.8	5/8"	14	28	45	39	415	6019
F90G0812	-8	1/2"	12.8	3/4"	14	32	51	39	415	6019
F90G1008	-10	5/8"	16	1/2"	14	27	54	49	350	5076
F90G1010	-10	5/8"	16	5/8"	14	28	54	49	350	5076

BSPP FEMALE - 60° CONE - 90° ELBOW (2)


FEMMINA 90° BSPP SV 60°
 FEMELLE 90° BSPP CÔNE 60°
 DKR 90° BOGEN 60° KONUS (BSPP-GEWINDE)
 HEMBRA GIRATORIA A 90° BSPP - CONO 60°

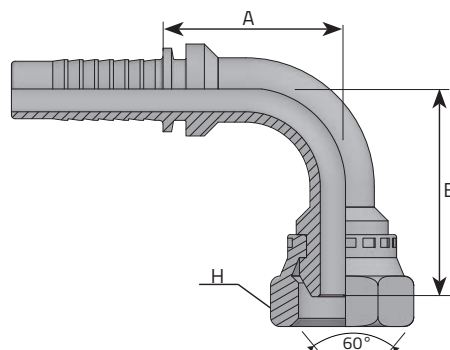

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F90G1012	-10	5/8"	16	3/4"	14	32	56	49	350	5076
F90G1208	-12	3/4"	19	1/2"	14	27	56	53.5	350	5076
F90G1210	-12	3/4"	19	5/8"	14	28	56	53.5	350	5076
F90G1212	-12	3/4"	19	3/4"	14	32	59	53.5	350	5076
F90G1216	-12	3/4"	19	1"	11	38	65	53.5	350	5076
F90G1612	-16	1"	25.4	3/4"	14	32	72	68.5	280	4061
F90G1616	-16	1"	25.4	1"	11	38	72	73	280	4061
F90G1620	-16	1"	25.4	1.1/4"	11	50	80	73	280	4061
F90G2020	-20	1.1/4"	31.8	1.1/4"	11	50	93	89	210	3046
F90G2024	-20	1.1/4"	31.8	1.1/2"	11	55	98.5	89	210	3046
F90G2424	-24	1.1/2"	38.1	1.1/2"	11	55	114	101	185	2683

BSPP FEMALE - 90° ELBOW (COMPACT FORGED)


FEMMINA 90° BSPP SV 60° COMPATTA
 FEMELLE 90° BSPP COMPACTE CÔNE 60°
 DKR 90° KOMPAKT
 HEMBRA GIRATORIA A 90° BSPP COMPACTA

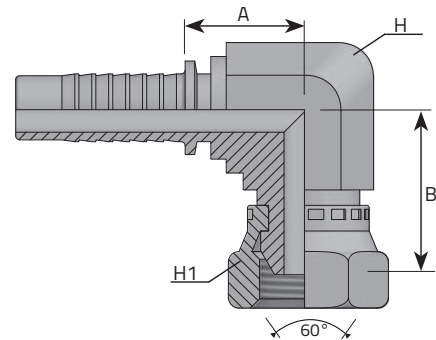

Code	Tube			Thread		Dimensions					Pressure	
	D.N.	Hose	Diam	T	t/1"	H	H1	B	A		Bar	Psi
		Inch	mm	Inch		mm	mm	mm	mm			
F90G0404K	-4	1/4"	6.4	1/4"	19	14	19	26.7	19		450	6526
F90G0406K	-4	1/4"	6.4	3/8"	19	19	22	28	21.5		450	6526
F90G0506K	-5	5/16"	7.9	3/8"	19	19	22	28	21.5		350	5076
F90G0606K	-6	3/8"	9.5	3/8"	19	19	22	28	21.5		450	6526
F90G0608K	-6	3/8"	9.5	1/2"	14	22	27	32.5	24		450	6526
F90G0808K	-8	1/2"	12.8	1/2"	14	22	27	32.5	24		415	6019
F90G1212K	-12	3/4"	19	3/4"	14	27	32	39.5	25		350	5076
F90G1616K	-16	1"	25.4	1"	11	33	38	43.5	32.5		280	4061

BSPP FEMALE - 60° CONE - 45° ELBOW (1)


FEMMINA 45° BSPP SV 60°
 FEMELLE 45° BSPP CÔNE 60°
 DKR 45° BOGEN 60° KONUS (BSPP-GEWINDE)
 HEMBRA GIRATORIA A 45° BSPP - CONO 60°

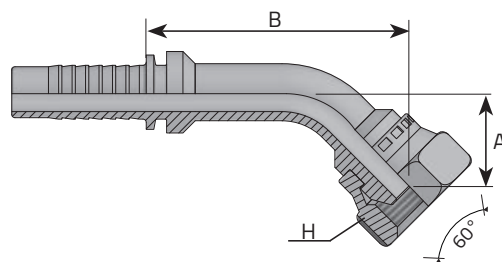

Code	Tube		Thread		Dimensions				Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	B	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F45G0302	-3	3/16"	4.8	1/8"	28	15	17	40	350	5076
F45G0304	-3	3/16"	4.8	1/4"	19	19	17	40	415	6019
F45G0402	-4	1/4"	6.4	1/8"	28	15	17	40	350	5076
F45G0404	-4	1/4"	6.4	1/4"	19	19	17	40	450	6526
F45G0406	-4	1/4"	6.4	3/8"	19	22	20	43	450	6526
F45G0408	-4	1/4"	6.4	1/2"	14	27	24	55	450	6526
F45G0504	-5	5/16"	7.9	1/4"	19	19	20	51	350	5076
F45G0506	-5	5/16"	7.9	3/8"	19	22	21	52	350	5076
F45G0508	-5	5/16"	7.9	1/2"	14	27	24	55	350	5076
F45G0604	-6	3/8"	9.5	1/4"	19	19	19	54	450	6526
F45G0606	-6	3/8"	9.5	3/8"	19	22	20	55	450	6526
F45G0608	-6	3/8"	9.5	1/2"	14	27	23	58	450	6526
F45G0806	-8	1/2"	12.8	3/8"	19	22	20	63	415	6019
F45G0808	-8	1/2"	12.8	1/2"	14	27	23	65	415	6019
F45G0810	-8	1/2"	12.8	5/8"	14	28	23	65	415	6019
F45G0812	-8	1/2"	12.8	3/4"	14	32	21	66	415	6019
F45G1008	-10	5/8"	16	1/2"	14	27	25	63	350	5076
F45G1010	-10	5/8"	16	5/8"	14	28	25	64	350	5076

BSPP FEMALE - 60° CONE - 45° ELBOW (2)


FEMMINA 45° BSPP SV 60°
 FEMELLE 45° BSPP CÔNE 60°
 DKR 45° BOGEN 60° KONUS (BSPP-GEWINDE)
 HEMBRA BSPP CODO 45° ASIENTO 60°

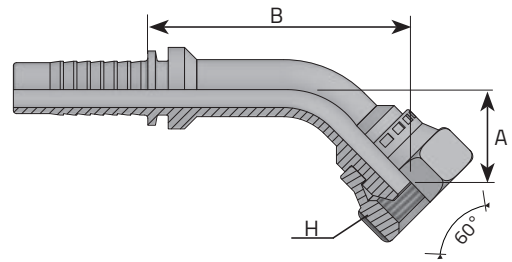

Code	Tube		Thread		Dimensions					Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	B		Bar	Psi
		Inch	mm	Inch		mm	mm	mm			
F45G1012	-10	5/8"	16	3/4"	14	32	26	64		350	5076
F45G1208	-12	3/4"	19	1/2"	14	27	28	62		350	5076
F45G1210	-12	3/4"	19	5/8"	14	28	29	63		350	5076
F45G1212	-12	3/4"	19	3/4"	14	32	29	63		350	5076
F45G1216	-12	3/4"	19	1"	11	38	31	65		350	5076
F45G1612	-16	1"	25.4	3/4"	14	32	39	88		280	4061
F45G1616	-16	1"	25.4	1"	11	38	41	90		280	4061
F45G1620	-16	1"	25.4	1.1/4"	11	50	44	93		280	4061
F45G2020	-20	1.1/4"	31.8	1.1/4"	11	50	44	102		210	3046
F45G2024	-20	1.1/4"	31.8	1.1/2"	11	55	45	103		210	3046
F45G2424	-24	1.1/2"	38.1	1.1/2"	11	55	45	118		185	2683

BSPP FEMALE (SLIP-ON NUT)


FEMMINA BSPP SV 60° (DADO LIBERO)
 FEMELLE DROIT BSPP CÔNE 60° (ÉCROU LIBRE)
 DKR 60° KONUS (BSPP-GEWINDE) + ÜBERWURFMUTTER
 HEMBRA GIRATORIA RECTA BSPP CONO 60° (TUERCA LIBRE)

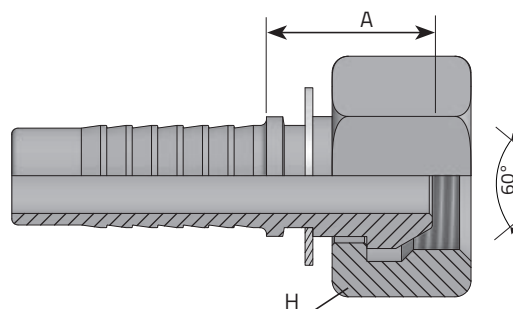

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	Inch		mm	mm		
FDG0304SF	-3	3/16"	4.8	1/4"	19	19	18	415	6019
FDG0404SF	-4	1/4"	6.4	1/4"	19	19	18	450	6526
FDG0406SF	-4	1/4"	6.4	3/8"	19	22	19	450	6526
FDG0506SF	-5	5/16"	7.9	3/8"	19	22	19	350	5076
FDG0606SF	-6	3/8"	9.5	3/8"	19	22	20	450	6526
FDG0608SF	-6	3/8"	9.5	1/2"	14	27	21	450	6526
FDG0808SF	-8	1/2"	12.8	1/2"	14	27	22	415	6019

BSPP FEMALE - 90° ELBOW (SLIP-ON NUT)


FEMMINA BSPP SV 60° (DADO LIBERO)
 FEMELLE 90° BSPP CÔNE 60° (ÉCROU LIBRE)
 DKR 90° BOGEN 60° KONUS (BSPP- GEWINDE) + ÜBERWURFMUTTER
 HEMBRA GIRATORIA A 90° BSPP CONO 60° (TUERCA LIBRE)

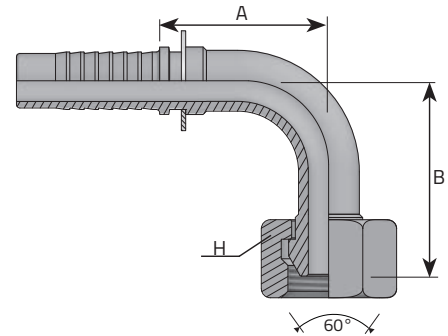

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A		
		Inch	mm	Inch		mm	mm	mm	Bar	Psi
F90G0304SF	-3	3/16"	4.8	1/4"	19	19	29	23	415	6019
F90G0404SF	-4	1/4"	6.4	1/4"	19	19	29	23	450	6526
F90G0406SF	-4	1/4"	6.4	3/8"	19	22	32	23	450	6526
F90G0506SF	-5	5/16"	7.9	3/8"	19	22	35.5	31.5	350	5076
F90G0606SF	-6	3/8"	9.5	3/8"	19	22	38	33	450	6526
F90G0608SF	-6	3/8"	9.5	1/2"	14	27	42	33	450	6526
F90G0808SF	-8	1/2"	12.8	1/2"	14	27	45	39	415	6019

BSPP FEMALE 45° ELBOW (SLIP-ON NUT)


FEMMINA 45° BSPP SV 60° DADO LIBERO
 FEMELLE 45° BSPP CÔNE 60° (ÉCROU LIBRE)
 DKR 45° BOGEN 60° KONUS (BSPP- GEWINDE) + ÜBERWURFMUTTER
 HEMBRA GIRATORIA A 45° BSPP CONO 60° (TUERCA LIBRE)

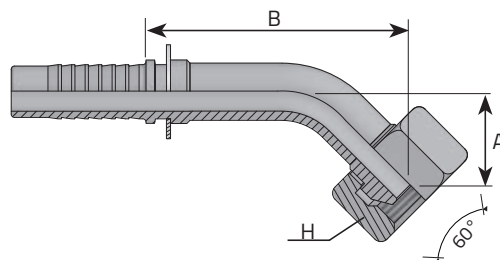

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	B	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F45G0304SF	-3	3/16"	4.8	1/4"	19	19	17	40	415	6019
F45G0404SF	-4	1/4"	6.4	1/4"	19	19	17	40	450	6526
F45G0406SF	-4	1/4"	6.4	3/8"	19	22	20	43	450	6526
F45G0506SF	-5	5/16"	7.9	3/8"	19	22	21	52	350	5076
F45G0606SF	-6	3/8"	9.5	3/8"	19	22	20	55	450	6526
F45G0608SF	-6	3/8"	9.5	1/2"	14	27	23	58	450	6526
F45G0808SF	-8	1/2"	12.8	1/2"	14	27	23	65	415	6019

BSPP FEMALE (O - RING - SLIP - ON NUT)

FEMMINA BSPP SV 60° (DADO LIBERO E O-RING)
 FEMELLE DROIT BSPP CÔNE 60° (ÉCROU LIBRE AVEC O-RING)
 DKR 60° KONUS (BSPP-GEWINDE) + ÜBERWURFMUTTER + O-RING
 HEMBRA GIRATORIA RECTA BSPP CONO 60° (TUERCA LIBRE - JUNTA TORICA)

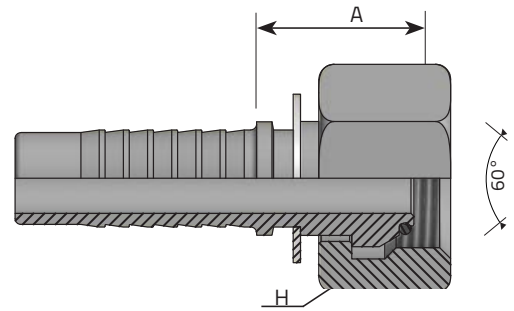

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
		Inch	mm	Inch		mm	mm			
FDG0404SF-OR	-4	1/4"	6.4	1/4"	19	19	18		450	6526
FDG0406SF-OR	-4	1/4"	6.4	3/8"	19	22	19		450	6526
FDG0506SF-OR	-5	5/16"	7.9	3/8"	19	22	19		350	5076
FDG0606SF-OR	-6	3/8"	9.5	3/8"	19	22	20		450	6526
FDG0608SF-OR	-6	3/8"	9.5	1/2"	14	27	21		450	6526
FDG0808SF-OR	-8	1/2"	12.8	1/2"	14	27	22		415	6019


BSPP FEMALE - 90° ELBOW (O - RING - SLIP - ON NUT)

FEMMINA BSPP SV 60° (DADO LIBERO E O-RING)

FEMELLE 90° BSPP CÔNE 60° (ÉCROU LIBRE AVEC O-RING)

DKR 90° BOGEN 60° KONUS (BSPP- GEWINDE) + ÜBERWURFMUTTER + O-RING

HEMBRA GIRATORIA A 90° BSPP CONO 60° (TUERCA LIBRE - JUNTA TORICA)

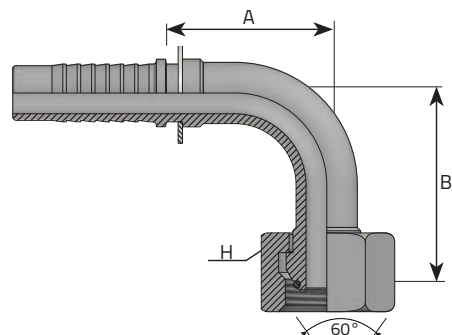

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F90G0404SF-OR	-4	1/4"	6.4	1/4"	19	19	29	23	450	6526
F90G0406SF-OR	-4	1/4"	6.4	3/8"	19	22	32	23	450	6526
F90G0506SF-OR	-5	5/16"	7.9	3/8"	19	22	35.5	31.5	350	5076
F90G0606SF-OR	-6	3/8"	9.5	3/8"	19	22	38	33	450	6526
F90G0608SF-OR	-6	3/8"	9.5	1/2"	14	27	42	33	450	6526
F90G0808SF-OR	-8	1/2"	12.8	1/2"	14	27	45	39	415	6019


BSPP FEMALE 45° ELBOW (O - RING - SLIP - ON NUT)

FEMMINA 45° BSPP SV 60° (DADO LIBERO E O-RING)

FEMELLE 45° BSPP CÔNE 60° (ÉCROU LIBRE AVEC O-RING)

DKR 45° BOGEN 60° KONUS (BSPP- GEWINDE) + ÜBERWURFMUTTER + O-RING

HEMBRA GIRATORIA A 45° BSPP CONO 60° (TUERCA LIBRE - JUNTA TORICA)

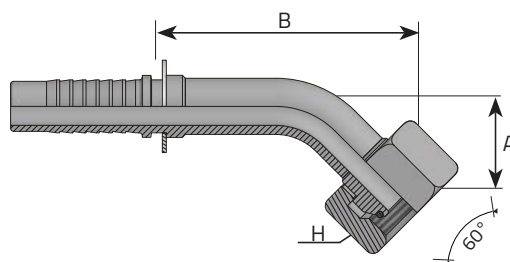


Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	B	Bar	Psi
		Inch	mm	Inch		mm	mm	mm		
F45G0404SF-OR	-4	1/4"	6.4	1/4"	19	19	17	40	450	6526
F45G0406SF-OR	-4	1/4"	6.4	3/8"	19	22	20	43	450	6526
F45G0506SF-OR	-5	5/16"	7.9	3/8"	19	22	21	52	350	5076
F45G0606SF-OR	-6	3/8"	9.5	3/8"	19	22	20	55	450	6526
F45G0608SF-OR	-6	3/8"	9.5	1/2"	14	27	23	58	450	6526
F45G0808SF-OR	-8	1/2"	12.8	1/2"	14	27	23	65	415	6019

BSPP FEMALE (THRUST-WIRE NUT) (1)

FEMMINA DIRITTA BSPP SV 60° DADO SPINATO CON O-RING
 FEMELLE DROITE BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 60° KONUS MIT O-RING (BSPP- GEWINDE) + GESTIFTETE
 ÜBERWURFMUTTER
 HEMBRA GIRATORIA RECTA BSPP CON O-RING CONO 60° (TUERCA CON
 SEGURO)

* : without o-ring / senza o-ring

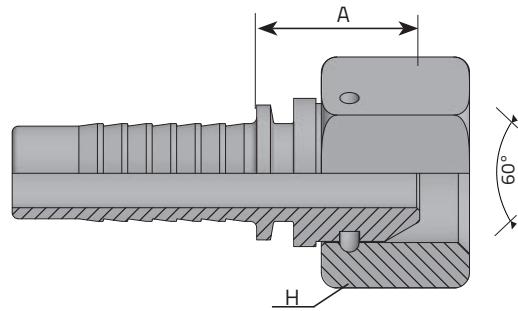


	Code	Tube			Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
			Inch	mm	Inch		mm	mm			
*	FDG0302SP	-3	3/16"	4.8	1/8"	28	14	18		350	5076
*	FDG0304SP	-3	3/16"	4.8	1/4"	19	19	18		415	6019
*	FDG0402SP	-4	1/4"	6.4	1/8"	28	14	18		350	5076
*	FDG0404SP	-4	1/4"	6.4	1/4"	19	19	18		450	6526
*	FDG0406SP	-4	1/4"	6.4	3/8"	19	22	19		450	6526
*	FDG0408SP	-4	1/4"	6.4	1/2"	14	27	21		450	6526
*	FDG0504SP	-5	5/16"	7.9	1/4"	19	19	18		350	5076
*	FDG0506SP	-5	5/16"	7.9	3/8"	19	22	19		350	5076
*	FDG0508SP	-5	5/16"	7.9	1/2"	14	27	21		350	5076
*	FDG0604SP	-6	3/8"	9.5	1/4"	19	19	19		450	6526
*	FDG0606SP	-6	3/8"	9.5	3/8"	19	22	20		450	6526
*	FDG0608SP	-6	3/8"	9.5	1/2"	14	27	21		450	6526
*	FDG0806SP	-8	1/2"	12.8	3/8"	19	19	20		415	6019
*	FDG0808SP	-8	1/2"	12.8	1/2"	14	27	22		415	6019
	FDG0812SP	-8	1/2"	12.8	3/4"	14	32	24		415	6019
*	FDG1008SP	-10	5/8"	16	1/2"	14	27	22		350	5076

BSPP FEMALE (THRUST-WIRE NUT) (2)

FEMMINA DIRITTA BSPP SV 60° DADO SPINATO CON O-RING
 FEMELLE DROITE BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 60° KONUS MIT O-RING (BSPP- GEWINDE) + GESTIFTETE
 ÜBERWURFMUTTER HEMBRA GIRATORIA RECTA BSPP CON O-RING CONO 60°
 (TUERCA CON SEGURO)

* : without o-ring / senza o-ring

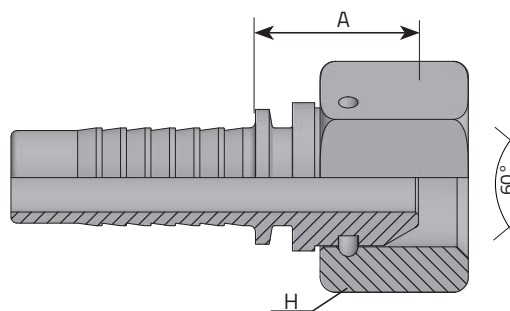


	Code	Tube		Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
			Inch	mm	Inch		mm	mm		
	FDG1012SP	-10	5/8"	16	3/4"	14	32	24	350	5076
*	FDG1208SP	-12	3/4"	19	1/2"	14	27	22.5	350	5076
	FDG1212SP	-12	3/4"	19	3/4"	14	32	25	350	5076
	FDG1612SP	-16	1"	25.4	3/4"	14	32	26	350	5076
	FDG1616SP	-16	1"	25.4	1"	11	38	27	280	4061
	FDG1620SP	-16	1"	25.4	1.1/4"	11	50	30	280	4061
	FDG2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	30	210	3046
	FDG2024SP	-20	1.1/4"	31.8	1.1/2"	11	55	32	210	3046
	FDG2424SP	-24	1.1/2"	38.1	1.1/2"	11	55	32	185	2683
	FDG2432SP	-24	1.1/2"	38.1	2"	11	70	32.5	185	2683
	FDG3232SP	-32	2"	50.8	2"	11	70	33.5	165	2393

BSPP FEMALE 90° ELBOW (THRUST-WIRE NUT) (1)

FEMMINA 90° BSPP SV60° DADO SPINATO CON O-RING
 FEMELLE 90° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 90° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) + GESTIFTETE
 HEMBRA GIRATORIA A 90° BSPP CON O-RING (TUERCA CON SEGURO)

* : without o-ring / senza o-ring

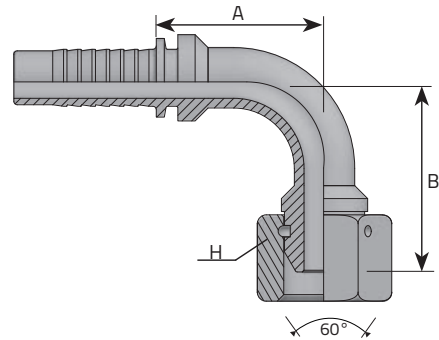


	Code	Tube		Thread		Dimensions				Pressure	
		D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
		Inch		mm	Inch		mm	mm	mm		
*	F90G0302SP	-3	3/16"	4.8	1/8"	28	14	29	23	350	5076
*	F90G0304SP	-3	3/16"	4.8	1/4"	19	19	29	23	415	6019
*	F90G0402SP	-4	1/4"	6.4	1/8"	28	14	29	23	350	5076
*	F90G0404SP	-4	1/4"	6.4	1/4"	19	19	29	23	450	6526
*	F90G0406SP	-4	1/4"	6.4	3/8"	19	22	32	23	450	6526
*	F90G0408SP	-4	1/4"	6.4	1/2"	14	27	39	31.5	450	6526
*	F90G0504SP	-5	5/16"	7.9	1/4"	19	19	33.5	31.5	350	5076
*	F90G0506SP	-5	5/16"	7.9	3/8"	19	22	35.5	31.5	350	5076
*	F90G0508SP	-5	5/16"	7.9	1/2"	14	27	39	31.5	350	5076
*	F90G0604SP	-6	3/8"	9.5	1/4"	19	19	37	33	450	6526
*	F90G0606SP	-6	3/8"	9.5	3/8"	19	22	38	33	450	6526
*	F90G0608SP	-6	3/8"	9.5	1/2"	14	27	42	33	450	6526
*	F90G0806SP	-8	1/2"	12.8	3/8"	19	22	43	39	415	6019
*	F90G0808SP	-8	1/2"	12.8	1/2"	14	27	45	39	415	6019
	F90G0812SP	-8	1/2"	12.8	3/4"	14	32	51	39	415	6019
*	F90G1008SP	-10	5/8"	16	1/2"	14	27	54	49	350	5076
	F90G1012SP	-10	5/8"	16	3/4"	14	32	56	49	350	5076

BSPP FEMALE 90° ELBOW (THRUST-WIRE NUT) (2)

FEMMINA 90° BSPP SV60° DADO SPINATO CON O-RING
 FEMELLE 90° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 90° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) + GESTIFTETE
 HEMBRA GIRATORIA A 90° BSPP CON O-RING (TUERCA CON SEGURO)

*: without o-ring / senza o-ring

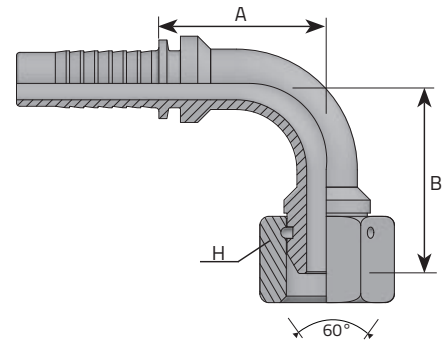


	Code	Tube			Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	B	A	Bar	Psi
			Inch	mm	Inch		mm	mm	mm		
*	F90G1208SP	-12	3/4"	19	1/2"	14	27	56	53.5	350	5076
	F90G1212SP	-12	3/4"	19	3/4"	14	32	59	53.5	350	5076
	F90G1216SP	-12	3/4"	19	1"	11	38	65	53.5	350	5076
	F90G1612SP	-16	1"	25.4	3/4"	14	32	72	68.5	350	5076
	F90G1616SP	-16	1"	25.4	1"	11	38	72	73	280	4061
	F90G1620SP	-16	1"	25.4	1.1/4"	11	50	80	73	280	4061
	F90G2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	93	89	210	3046
	F90G2024SP	-20	1.1/4"	31.8	1.1/2"	11	55	98.5	89	210	3046
	F90G2424SP	-24	1.1/2"	38.1	1.1/2"	11	55	114	101	185	2683
	F90G2432SP	-24	1.1/2"	38.1	2"	11	70	118	101	185	2683
	F90G3232SP	-32	2"	50.8	2"	11	70	136	135	165	2393

BSPP FEMALE 45° ELBOW (THRUST-WIRE NUT) (1)

FEMMINA 45° BSPP SV60° DADO SPINATO CON O-RING
 FEMELLE 45° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 45° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) + GESTIFTETE
 HEMBRA GIRATORIA A 45° BSPP CON O-RING (TUERCA CON SEGURO)

* : without o-ring / senza o-ring

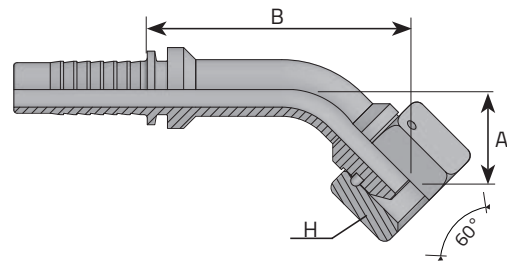


	Code	Tube			Thread		Dimensions			Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A	B	Bar	Psi
			Inch	mm	Inch		mm	mm	mm		
*	F45G0302SP	-3	3/16"	4.8	1/8"	28	14	17	40	350	5076
*	F45G0304SP	-3	3/16"	4.8	1/4"	19	19	17	40	415	6019
*	F45G0402SP	-4	1/4"	6.4	1/8"	28	14	17	40	350	5076
*	F45G0404SP	-4	1/4"	6.4	1/4"	19	19	17	40	450	6526
*	F45G0406SP	-4	1/4"	6.4	3/8"	19	22	20	43	450	6526
*	F45G0408SP	-4	1/4"	6.4	1/2"	14	27	24	55	450	6526
*	F45G0504SP	-5	5/16"	7.9	1/4"	19	19	20	51	350	5076
*	F45G0506SP	-5	5/16"	7.9	3/8"	19	22	21	52	350	5076
*	F45G0508SP	-5	5/16"	7.9	1/2"	14	27	24	55	350	5076
*	F45G0604SP	-6	3/8"	9.5	1/4"	19	19	19	54	450	6526
*	F45G0606SP	-6	3/8"	9.5	3/8"	19	22	20	55	450	6526
*	F45G0608SP	-6	3/8"	9.5	1/2"	14	27	23	58	450	6526
*	F45G0806SP	-8	1/2"	12.8	3/8"	19	22	20	63	415	6019
*	F45G0808SP	-8	1/2"	12.8	1/2"	14	27	23	65	415	6019
	F45G0812SP	-8	1/2"	12.8	3/4"	14	32	21	66	415	6019
*	F45G1008SP	-10	5/8"	16	1/2"	14	27	25	63	350	5076

BSPP FEMALE 45° ELBOW (THRUST-WIRE NUT) (2)

FEMMINA 45° BSPP SV60° DADO SPINATO CON O-RING
 FEMELLE 45° BSPP AVEC O-RING CÔNE 60° (ÉCROU À JONC)
 DKOR 45° BOGEN 60° KONUS MIT O-RING (BSPP-GEWINDE) + GESTIFTETE
 HEMBRA GIRATORIA A 45° BSPP CON O-RING (TUERCA CON SEGURO)


*: without o-ring / senza o-ring

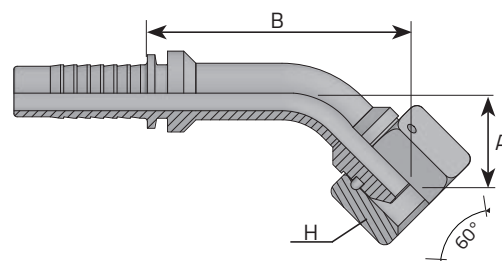

	Code	Tube		Thread		Dimensions				Pressure	
		D.N.	Hose	Diam	T	t/1"	H	A	B	Bar	Psi
		Inch		mm	Inch		mm	mm	mm		
	F45G1012SP	-10	5/8"	16	3/4"	14	32	26	64	350	5076
*	F45G1208SP	-12	3/4"	19	1/2"	14	27	28	62	350	5076
	F45G1212SP	-12	3/4"	19	3/4"	14	32	29	63	350	5076
	F45G1216SP	-12	3/4"	19	1"	11	38	31	65	350	5076
	F45G1612SP	-16	1"	25.4	3/4"	14	32	39	88	350	5076
	F45G1616SP	-16	1"	25.4	1"	11	38	41	90	280	4061
	F45G1620SP	-16	1"	25.4	1.1/4"	11	50	44	93	280	4061
	F45G2020SP	-20	1.1/4"	31.8	1.1/4"	11	50	44	102	210	3046
	F45G2024SP	-20	1.1/4"	31.8	1.1/2"	11	55	45	103	210	3046
	F45G2424SP	-24	1.1/2"	38.1	1.1/2"	11	55	45	118	185	2683
	F45G2432SP	-24	1.1/2"	38.1	2"	11	70	118	101	185	2683
	F45G3232SP	-32	2"	50.8	2"	11	70	55	145	165	2393

BSPP MALE (FLAT SEAT)


MASCHIO BSPP SEDE PIANA
 MÂLE BSPP FACE PLATE
 AGR-F FLACHDICHTEND (BSPP- GEWINDE)
 MACHO FIJO BSPP ASIENTO PLANO

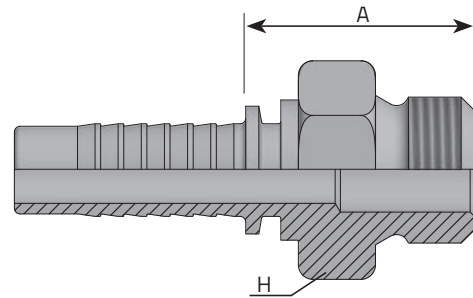

Code	Tube			Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A		Bar	Psi
		Inch	mm	Inch		mm	mm			
MGSP0404	-4	1/4"	6.4	1/4"	19	19	27		450	6526
MGSP0406	-4	1/4"	6.4	3/8"	19	22	29		450	6526
MGSP0506	-5	5/16"	7.9	3/8"	19	22	29		350	5076
MGSP0606	-6	3/8"	9.5	3/8"	19	22	28.5		450	6526
MGSP0608	-6	3/8"	9.5	1/2"	14	27	32		450	6526
MGSP0808	-8	1/2"	12.8	1/2"	14	27	32		415	6019
MGSP0810	-8	1/2"	12.8	5/8"	14	30	35		415	6019
MGSP0812	-8	1/2"	12.8	3/4"	14	32	36		415	6019
MGSP1010	-10	5/8"	16	5/8"	14	30	35		350	5076
MGSP1012	-10	5/8"	16	3/4"	14	32	36		350	5076
MGSP1212	-12	3/4"	19	3/4"	14	32	37		350	5076
MGSP1216	-12	3/4"	19	1"	11	38	40		350	5076
MGSP1616	-16	1"	25.4	1"	11	38	39.5		280	4061
MGSP2020	-20	1.1/4"	31.8	1.1/4"	11	50	46		210	3046
MGSP2424	-24	1.1/2"	38.1	1.1/2"	11	55	43		184	2669

BSPP FEMALE (FLAT SEAT)

FEMMINA DIRITTA BSPP SEDE PIANA
 FEMELLE DROIT BSPP FACE PLATE
 DKR-F FLACHDICHTEND (BSPP-GEWINDE)
 HEMBRA RECTA BSPP ASIENTO PLANO

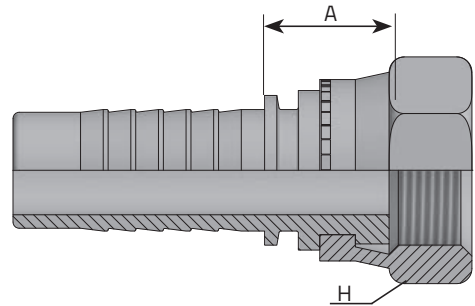

Code	Tube		Thread		Dimensions			Pressure	
	D.N.	Hose	Diam	T	t/1"	H	A	Bar	Psi
		Inch	mm	Inch		mm	mm		
FDGSP0404	-4	1/4"	6.4	1/4"	19	19	14	450	6526
FDGSP0406	-4	1/4"	6.4	3/8"	19	22	15	450	6526
FDGSP0506	-5	5/16"	7.9	3/8"	19	22	15	350	5076
FDGSP0606	-6	3/8"	9.5	3/8"	19	22	16	450	6526
FDGSP0608	-6	3/8"	9.5	1/2"	14	27	17	450	6526
FDGSP0808	-8	1/2"	12.8	1/2"	14	27	17	415	6019
FDGSP0810	-8	1/2"	12.8	5/8"	14	28	17	415	6019
FDGSP0812	-8	1/2"	12.8	3/4"	14	32	19	415	6019
FDGSP1010	-10	5/8"	16	5/8"	14	28	17	350	5076
FDGSP1012	-10	5/8"	16	3/4"	14	32	20	350	5076
FDGSP1212	-12	3/4"	19	3/4"	14	32	21	350	5076
FDGSP1216	-12	3/4"	19	1"	11	38	22	350	5076
FDGSP1616	-16	1"	25.4	1"	11	38	23	280	4061
FDGSP2020	-20	1.1/4"	31.8	1.1/4"	11	50	26	210	3046