




Vitillo

Hydraulic Components

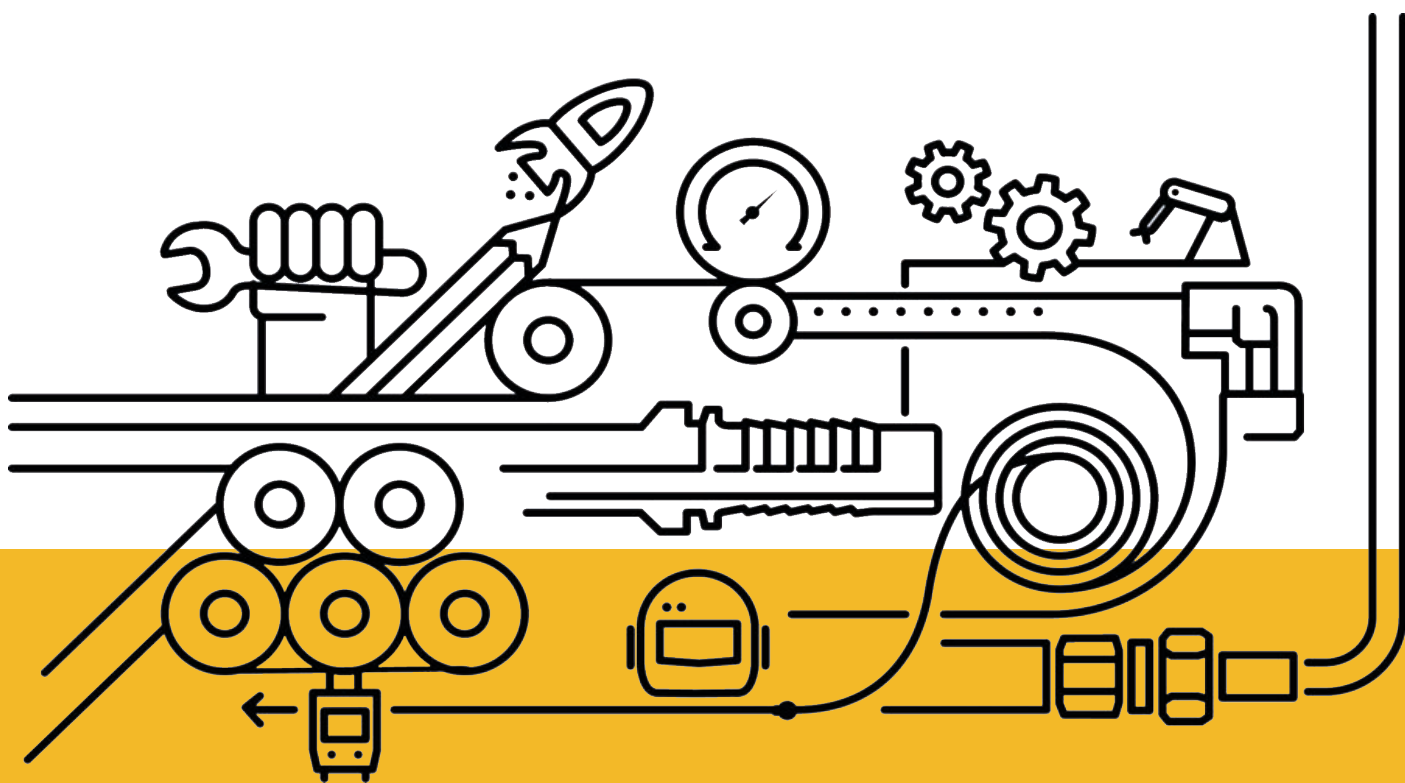

Hoses



Press fittings ISO 12151 SAE J516



BSP adaptors BS 5200



JIC adaptors
SAE J514



DIN 24° adaptors
DIN 2353



ORFS adaptors
ORFS J1453



Complete product range

Vitillo is your solution for any hydraulic applications. Spiral and braided hoses with metal and textile reinforcement, standard and interlock press fittings, BSP, JIC, DIN and ORFS adaptors, customized special fittings.

All our fittings and adapters are available in Zinc chromium III plating, Zinc-nichel plating and Stainless steel.



Whatever the customer's needs, Vitillo has the answer.

Alternative Versions

Zinc Chromium III





- Sealing Layer
- Passivation
- Zinc Cr III
- Carbon Steel

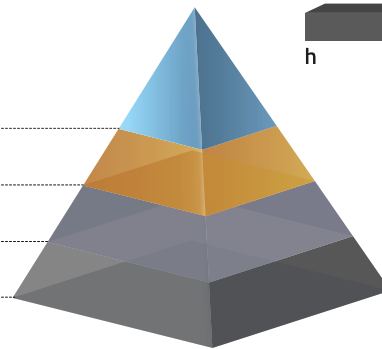

Zinc Nickel




- Sealing Layer
- Passivation
- Zinc Nickel
- Carbon Steel

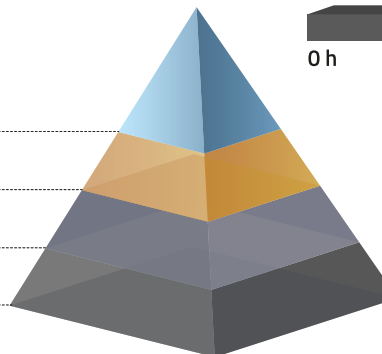

Stainless Steel




- Stainless Steel

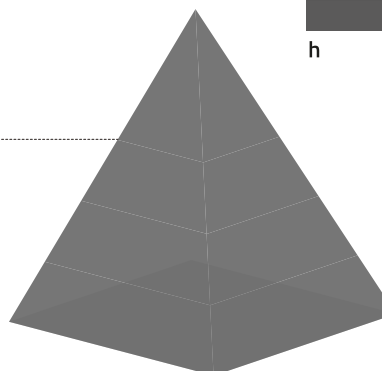



Applications

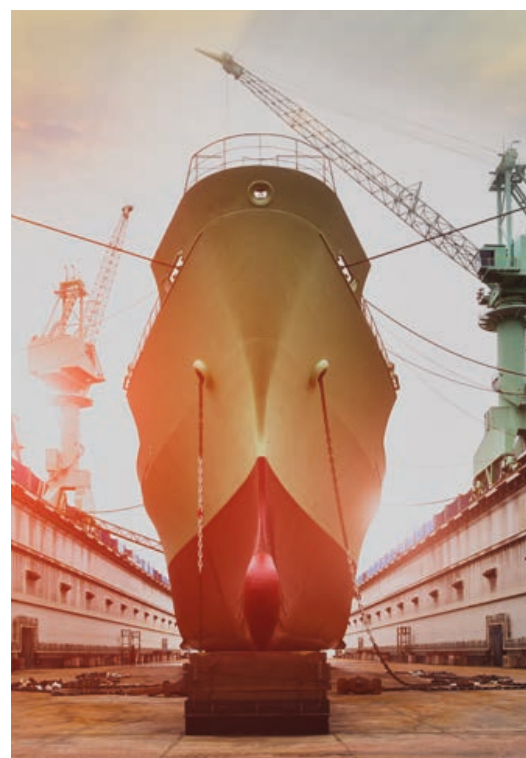

High performances in very extreme conditions



Certifications



▼

MINE SAFETY AND HEALTH
ADMINISTRATION
(MSHA)




▼

DET NORSKE VERITAS (DNV)
GERMANISCHER LLOYD (GL)



▼

RINA (Registro Navale Italiano)



▼

MarED



▼

GOST-R



AC 149



▼

J.S. Hamilton Poland Sp. z o.o. –
Jednostka Certyfikująca



▼


UNI EN 45545-2

COMPONENTS ORFS

ABO

BUSH


/ Pg. 14



DBO

ORFS NUT


/ Pg. 15



AMO

MALE ORFS - MALE ORFS


/ Pg. 16



LMO

**90° MALE EQUAL EL-
BOW-ORFS MALE**


/ Pg. 17



QMO

**45° MALE ELBOW-ORFS
MALE**


/ Pg. 18



TMO

T ADPT MALE ORFS

/ Pg. 19




MALE-MALE ORFS

APPMO

BULKHEAD CONNECTION


/ Pg. 20



LPPMO

**90° BULKHEAD-ORFS
MALE**


/ Pg. 21



QPPMO


**ORFS MALE BULKHEAD
ELBOW-ORFS MALE**

/ Pg. 22




TPPMO. B

**RUN TEE BULKHEAD MALE
ORFS / Pg. 23**



TPPMO. P

**BRANCH TEE BULKHEAD
MALE ORFS / Pg. 24**




SWIVEL F.-MALE ORFS

AFGO MO

**ADP SWIVEL FEMAL ORFS
- MALE ORFS**


/ Pg. 25-26



LMO. FGO

**90° ADAPTOR FEMALE
ORFS-MALE ORFS**


/ Pg. 27



QMO.FGO

**45° ADAPTOR FEMALE
ORFS -MALE ORFS**


/ Pg. 28



TMO FGO. B

**RUN FEMALE ORFS-TEE
MALE ORFS**


/ Pg. 29



TMO FGO. P

**BRANCH FEMALE ORFS-
TEE MALE ORFS**

/ Pg. 30




SWIVEL FEMALE ORFS

AFGO

**FEMALE ORFS -FEMALE
ORFS**


/ Pg. 31




Visual index

MALE ORFS-MALE BSPP

AMO MG. R
ADP MALE ORFS MALE
BSPP FORM E
/ Pg. 32-33




AMO MG. SV
ADP MALE ORFS MALE
BSPP 60° CONE
/ Pg. 34




MALE ORFS-F. BSPP

AMO FFG
ADP MALE ORFS - FIXED
FEMALE BSPP
/ Pg. 35




APPMO FFG
STRAIGHT BULKHEAD ADP
MALE ORFS-FEMALE BSPP
/ Pg. 36




FEMALE ORFS-BSPP


AFGO FFG
ORFS SWIVEL NUT BSPP
FEMALE
/ Pg. 37



AFGO MG SV
ADP FEMALE ORFS MALE
BSPP WITH 60° CONE
/ Pg. 38




AFGO MG R
ADAPTOR FEMALE ORFS -
MALE BSPP FORM E
/ Pg. 39




MALE ORFS-M. METRIC

AMO MM. R
ADP MALE ORFS MALE
METRIC FORM E
/ Pg. 40-41




AMO MM
ADP MALE ORFS MALE
METRIC
/ Pg. 42




FEMALE ORFS-METRIC

AFGO FFM
ORFS SWIVEL NUT METRIC
FEMALE
/ Pg. 43




AFGO MM R
ADAPTOR FEMALE ORFS -
MALE METRIC FORM E
/ Pg. 44




MALE ORFS-MALE UNF

AMO MU
ADP MALE ORFS MALE
UNF
/ Pg. 45-46



FEMALE ORFS-MALE UNF


AFGO MU
ADAPTOR FEMALE ORFS -
MALE UNF
/ Pg. 47




Visual index

MALE ORFS-MALE NPT


AMO MN
ADP MALE ORFS MALE NPT
/ Pg. 48



LMO MN
90° ADAPTOR MALE ORFS-
NPT MALE / Pg. 49




QMO MN
45° ADAPTOR MALE ORFS-
NPT MALE
/ Pg. 50




MALE ORFS-FEMALE NPT

AMO FFN
ADP MALE ORFS FIXED
FEMALE NPT
/ Pg. 51




APPMO FFN
STRAIGHT BULKHEAD
MALE ORFS FEMALE NPT
/ Pg. 52




MALE ORFS-MALE DIN

AMO ME
ADP MALE ORFS
MALE DIN
/ Pg. 53




MALE ORFS-FEMALE DIN

AMO FE
ADP MALE ORFS
FEMALE DIN
/ Pg. 54




MALE ORFS-MALE JIC

AMO MJ
ADP MALE ORFS
MALE JIC
/ Pg. 55




MALE ORFS-FEMALE JIC

AMO FGJ
ADP MALE ORFS
FEMALE JIC
/ Pg. 56




AFGO MJ
ADP FEMALE ORFS
MALE JIC
/ Pg. 57




WELD FITTINGS


AMNS T
WELDING ADP MALE ORFS
/ Pg. 58-59-60




TO .. W
WELDING UNION
/ Pg. 61



LMO .. W
90° ADP MALE ORFS SIDE
TO WELD
/ Pg. 62



LMO .. T
90° ADP MALE ORFS SIDE
FEMALE TO WELD
/ Pg. 63




LMO MOG

90° ADJUSTABLE MALE

ORFS- MALE BSPP

/ Pg. 64-65




LMO MOM R

90° ADJUSTABLE MALE

ORFS- MALE METRIC

/ Pg. 66




LMO MOU

90° ADJUSTABLE MALE

ORFS- MALE METRIC

/ Pg. 67-68




QMO MOG

45° ADJUSTABLE MALE

ORFS- MALE BSPP

/ Pg. 69-70




QMO MOM R

45° ADJUSTABLE MALE

ORFS- MALE METRIC

/ Pg. 71




QMO MOU

45° ADJUSTABLE MALE

ORFS- MALE METRIC

/ Pg. 72-73




TMO MOG B

RUN TEE ADJUSTABLE

MALE ORFS- MALE BSPP

/ Pg. 74-75




TMO MOM R B

RUN TEE ADJUSTABLE

MALE ORFS- MALE METRIC

/ Pg. 76




TMO MOU B

RUN TEE ADJUSTABLE

MALE ORFS- MALE METRIC

/ Pg. 77-78




TMO MOG P

BRUNCH TEE ADJUSTABLE

MALE ORFS- MALE BSPP

/ Pg. 79-80




TMO MOM R P

BRUNCH TEE ADJUSTABLE

MALE ORFS- MALE METRIC

/ Pg. 81




TMO MOU P

BRUNCH TEE ADJUSTABLE

MALE ORFS- MALE METRIC


/ Pg. 82-83



LFGO MOG

90° FEMALE ORFS- AD-
JUSTABLE MALE BSPP


/ Pg. 84



LFGO MOM R

90° FEMALE ORFS- AD-
JUSTABLE MALE METRIC

/ Pg. 85




LFGO MOU

90° ADJUSTABLE MALE

ORFS- MALE METRIC

/ Pg. 86




LOCKNUT ADJUSTABLE

ATMO

MALE PLUG UNF


/ Pg. 87



ATFGO

FEMALE PLUG UNF

/ Pg. 88



PLUG

Note:

Vitillo Spa offers a wide range of fittings and adaptors. If you have not found here the threads combination you were looking for, please check also in the other catalogues or ask to our Technical Staff.


La Vitillo Spa offre una vasta gamma di raccordi e adattatori. Se non avete trovato quì la combinazione del filetto che stavate cercando, si prega di controllare anche negli altri cataloghi o chiedere al nostro staff tecnico.

Nut - Bush coupling correspondence

bush D	bush D	Bush CODE	NUT Code
6	1/4	AB006	DB006
8	5/16	AB008	DB009
10	3/8	AB010	DB009
12	1/2	AB012	DB011
14	-	AB014	DB013
15	-	AB015	DB013
16	5/8	AB016	DB013
18		AB018	DB014
20	3/4	AB020	DB014
22	7/8	AB022	DB015
25	1	AB025	DB015
28		AB028	DB021
30	1.1/4	AB030	DB021
32		AB032	DB021
35		AB035	DB032
38	1.1/2	AB038	DB032

BUSH FOR ORFS

BOCCOLA PER TUBO SVASATO
MANCHON
 BÜCHSE
 CASQUILLO




Code	Thread	Dimensions				Pressure
		D	D	D1	L1	
		in	mm	mm	mm	
AB006		1/4	6	12.75	7.5	
AB008		5/16	8	15.75	8.5	
AB010		3/8	10	15.75	8.5	
AB012		1/2	12	18.9	10.5	
AB014		-	14	23.45	10.5	
AB015		-	15	23.45	10.5	
AB016		5/8	16	23.45	10.5	
AB018			18	27.85	12	
AB020		3/4	20	27.85	12	
AB022		7/8	22	34.2	13.5	
AB025		1	25	34.2	13.5	
AB028		-	28	40.55	13	
AB030		1.1/4	30	40.55	13	
AB032		-	32	40.55	13	
AB035		-	35	48.5	12.5	
AB038		1.1/2	38	48.5	12.5	

ORFS NUT

DADO DI SERRAGGIO
ÉCROU ORFS
ORFS-MUTTER
TUERCA ORFS

F1 ORFS




Code	Thread	Dimensions		Pressure
	F1	H	L1	
	in	mm	mm	
DB006	9/16"	17	15	
DB009	11/16"	22	17	
DB011	13/16"	24	20	
DB013	1"	30	24	
DB014	1.3/16"	36	26.5	
DB015	1.7/16"	41	27.5	
DB021	1.11/16"	50	27.5	
DB032	2"	60	27.5	

ADAPTOR MALE ORFS - MALE ORFS

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO ORFS
 ADAPTATEUR MÂLE ORFS - MÂLE ORFS
 ADAPTER AG-ORFS/AG-ORFS
 ADAPTADOR MACHO ORFS - MACHO ORFS

F1 ORFS


F2 ORFS

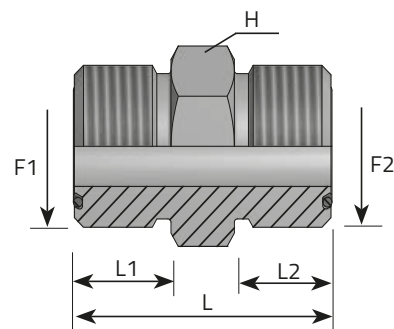

Code	Thread		Dimensions					Pressure	
	F1	F2	H	L1	L2	L		Bar	Psi
	in	in	mm	mm	mm	mm			
AM00606	9/16	9/16	17	10	10	27.5		630	9136
AM00909	11/16	11/16	19	11	11	31		630	9136
AM01111	13/16	13/16	22	13	13	35.5		630	9136
AM01313	1	1	27	15.5	15.5	42.5		420	6091
AM01414	1.3/16	1.3/16	32	17	17	47		420	6091
AM01515	1.7/16	1.7/16	41	17.5	17.5	49.5		420	6091
AM02121	1.11/16	1.11/16	46	17.5	17.5	51.5		280	4060
AM03232	2	2	55	17.5	17.5	53		280	4060
AM00906	11/16	9/16	19	11	10	30		630	9136
AM01109	13/16	11/16	22	13	11	33.5		630	9136
AM01311	1	13/16	27	15.5	13	40		420	6091
AM01409	1.3/16	11/16	32	17	11	41		420	6091
AM01411	1.3/16	13/16	32	17	13	43		420	6091
AM01413	1.3/16	1	32	17	15.5	45.5		420	6091
AM01514	1.7/16	1.3/16	41	17.5	17	49		420	6091
AM02115	1.11/16	1.7/16	46	17.5	17.5	51.5		280	4060

90° ADAPTOR MALE ORFS - MALE ORFS

GOMITO 90° MASCHIO ORFS MASCHIO ORFS
 ADAPTATEUR COUDE 90° MÂLE ORFS - MÂLE ORFS
 ADAPTER 90° GSK AG-ORFS/AG-ORFS
 CODO 90° MACHO ORFS - MACHO ORFS

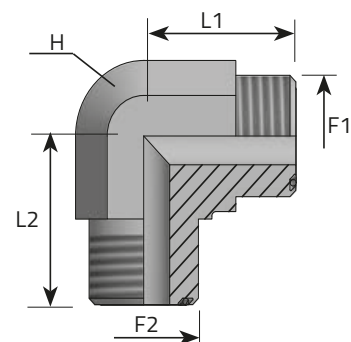

F1 ORFS

F2 ORFS


Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L2	Bar	Psi
	in	in	mm	mm	mm		
LM00606	9/16	9/16	14	21.5	21.5	630	9136
LM00909	11/16	11/16	19	25	25	630	9136
LM01111	13/16	13/16	22	28	28	630	9136
LM01313	1	1	27	33.5	33.5	420	6091
LM01414	1.3/16	1.3/16	30	37.5	37.5	420	6091
LM01515	1.7/16	1.7/16	36	41.5	41.5	420	6091
LM02121	1.11/16	1.11/16	41	52	52	280	4060
LM03232	2	2	48	49	49	280	4060
LM00609	9/16	11/16	19	25	23.5	630	9136
LM00911	11/16	13/16	19	28	25	630	9136
LM01113	13/16	1	27	33.5	31.5	420	6091
LM00914	11/16	1.3/16	30	37.5	32.5	420	6091
LM01114	13/16	1.3/16	30	37.5	34.5	420	6091
LM01314	1	1.3/16	30	37.5	36.5	420	6091
LM01415	1.3/16	1.7/16	36	41.5	41	420	6091
LM01521	1.7/16	1.11/16	41	52	52	280	4060

45° ADAPTOR MALE ORFS - MALE ORFS

GOMITO 45° MASCHIO ORFS MASCHIO ORFS
 ADAPTATEUR COUDE 45° MÂLE ORFS - MÂLE ORFS
 ADAPTER 45° GSK AG-ORFS/AG-ORFS
 CODO 45° MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

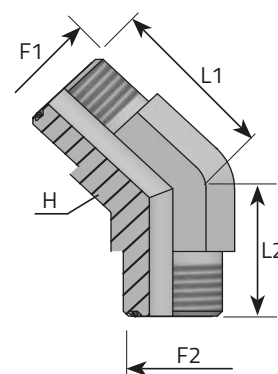

Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L2	Bar	Psi
	in	in	mm	mm	mm		
QMO0606	9/16	9/16	14	16	16	630	9136
QMO0909	11/16	11/16	19	19	19	630	9136
QMO1111	13/16	13/16	22	20.5	20.5	630	9136
QMO1313	1	1	27	23.5	23.5	420	6091
QMO1414	1.3/16	1.3/16	30	26	26	420	6091
QMO1515	1.7/16	1.7/16	36	30	30	420	6091
QMO2121	1.11/16	1.11/16	41	32	32	280	4060
QMO3232	2	2	48	37	37	280	4060


TEE ADAPTOR MALE ORFS

ADATTATORE A T MASCHIO ORFS MASCHIO ORFS

ADAPTATEUR TÉ MÂLE ORFS

ADAPTER T-STUCK 3 X AG-ORFS

ADAPTADOR TE MACHO ORFS

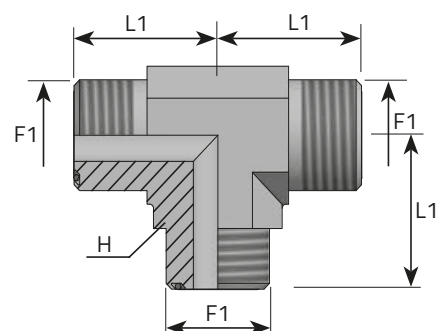

F1 ORFS


Code	Thread	Dimensions		Pressure	
		F1	H	L1	
		in	mm	mm	Bar Psi
TM00606	9/16		14	21.5	630 9136
TM00909	11/16		19	25	630 9136
TM01111	13/16		22	28	630 9136
TM01313	1		27	33.5	420 6091
TM01414	1.3/16		30	37.5	420 6091
TM01515	1.7/16		36	41.5	420 6091
TM02121	1.11/16		41	44.5	280 4060
TM03232	2		48	49	280 4060

STRAIGHT BULKHEAD ADAPTOR MALE ORFS

ADATTATORE PASSAPARETE MASCHIO ORFS
 PASSE-CLOISON MÂLE ORFS
 SCHOTTADAPTER AG-ORFS
 PASATABIQUE MACHO ORFS

F1 ORFS

F2 ORFS

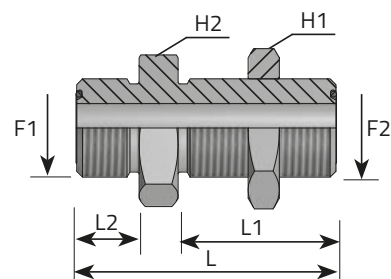


Code	Thread		Dimensions						Pressure	
	F1	F2	H	H1	L2	L1	L			
	in	in	mm	mm	mm	mm	mm		Bar	Psi
APPM00606	9/16	9/16	22	22	31.5	10	48		630	9136
APPM00909	11/16	11/16	27	27	34	11	53		630	9136
APPM01111	13/16	13/16	30	30	36.5	13	58,5		630	9136
APPM01313	1	1	36	36	40.5	15.5	66,5		420	6091
APPM01414	1.3/16	1.3/16	41	41	41.5	17	69		420	6091
APPM01515	1.7/16	1.7/16	46	46	42	17.5	70		280	4060
APPM02121	1.11/16	1.11/16	50	50	42	17.5	70		280	4060
APPM03232	2	2	60	60	42	17.5	70		280	4060

90° BULKHEAD ADAPTOR MALE ORFS - MALE ORFS

GOMITO 90° PASSAPARETE MASCHIO ORFS MASCHIO ORFS
 PASSE-CLOISON COUDE 90° MÂLE ORFS - MÂLE ORFS
 ADAPTER 90° GSK-SCHOTTADAPTER AG-ORFS - AG-ORFS
 PASATABIQUE CODO 90° MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS




	Code	Thread		Dimensions					Pressure	
		F1	F2	H1	H2	L1	L2	L3	Bar	Psi
		in	in	mm	mm	mm	mm	mm		
	LPPM00606	9/16	9/16	14	22	21.5	47	31.5	630	9136
	LPPM00909	11/16	11/16	19	27	25	52	34	630	9136
	LPPM01111	13/16	13/16	22	30	28	55.5	36.5	630	9136
	LPPM01313	1	1	27	36	33.5	63	40.5	420	6091
	LPPM01414	1.3/16	1.3/16	33	41	42	67	41.5	420	6091
	LPPM01515	1.7/16	1.7/16	36	46	45.5	75	43	420	6091
	LPPM02121	1.11/16	1.11/16	41	50	52	75.5	42	280	4060
	LPPM03232	2	2	48	60	49	79.5	42	280	4060

45° BULKHEAD ADAPTOR MALE ORFS - MALE ORFS

GOMITO 45° PASSAPARETE MASCHIO ORFS MASCHIO ORFS
 PASSE-CLOISON COUDE 45° MÂLE ORFS - MÂLE ORFS
 ADAPTER 45° GSK-SCHOTTADAPTER AG-ORFS - AG-ORFS
 PASATABIQUE CODO 45° MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

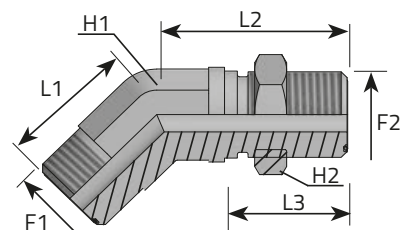


Code	Thread		Dimensions						Pressure	
	F1	F2	H1	H2	L1	L2	L3		Bar	Psi
	in	in	mm	mm	mm	mm	mm			
QPPM00606	9/16	9/16	14	22	16	44	31.5		630	9136
QPPM00909	11/16	11/16	19	27	19	48.5	34		630	9136
QPPM01111	13/16	13/16	22	30	20.5	51	36.5		630	9136
QPPM01313	1	1	27	36	23.5	56.5	40.5		420	6091
QPPM01414	1.3/16	1.3/16	30	41	26	60.5	41.5		420	6091
QPPM01515	1.7/16	1.7/16	36	46	30	65	42		420	6091
QPPM02121	1.11/16	1.11/16	41	50	32	67	42		280	4060
QPPM03232	2	2	48	60	37	67	42		280	4060

RUN TEE BULKHEAD ADAPTOR MALE ORFS - MALE ORFS

T PASSAPARETE AL BRACCIO MASCHIO ORFS MASCHIO ORFS
 PASSE-CLOISON TÉ MÂLE ORFS - MÂLE ORFS
 SCHOTTADAPTER T-STUCK AG-ORFS / AG-ORFS
 PASATABIQUE TE MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

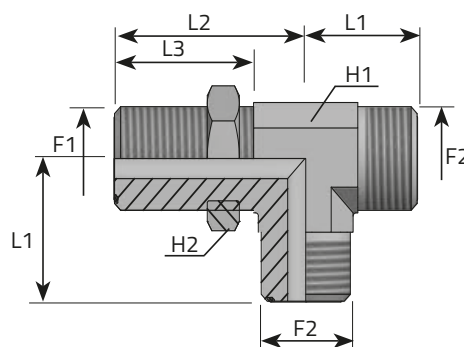

	Code	Thread		Dimensions					Pressure	
		F1	F2	H1	H2	L1	L2	L3	Bar	Psi
		in	in	mm	mm	mm	mm	mm		
	TPPM00606B	9/16	9/16	14	22	21.5	47	31.5	630	9136
	TPPM00909B	11/16	11/16	19	27	25	52	34	630	9136
	TPPM01111B	13/16	13/16	22	30	28	55.5	36.5	630	9136
	TPPM01313B	1	1	27	36	33.5	63	40.5	420	6091
	TPPM01414B	1.3/16	1.3/16	30	41	37.5	67	41.5	420	6091
	TPPM01515B	1.7/16	1.7/16	36	46	41.5	71	42	420	6091
	TPPM02121B	1.11/16	1.11/16	41	50	44.5	75.5	42	280	4060
	TPPM03232B	2	2	48	60	49	79.5	42	280	4060

BRANCH TEE BULKHEAD ADAPTOR MALE ORFS - MALE ORFS

T PASSAPARETE AL PIEDE MASCHIO ORFS MASCHIO ORFS


PASSE-CLOISON TÉ MÂLE ORFS - MÂLE ORFS

SCHOTTADAPTER T-STUCK 2 X AG-ORSF / 1 X AG-ORSF

PASATABIQUE TE MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

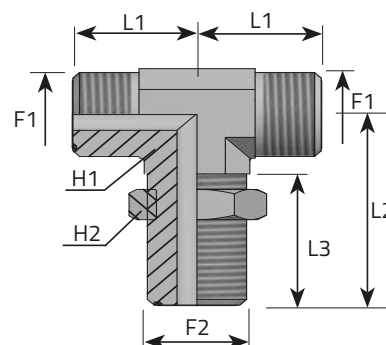


Code	Thread		Dimensions						Pressure	
	F1	F2	H1	H2	L1	L2	L3		Bar	Psi
	in	in	mm	mm	mm	mm	mm			
TPPM00606P	9/16	9/16	14	22	21.5	47	31.5		630	9136
TPPM00909P	11/16	11/16	19	27	25	52	34		630	9136
TPPM01111P	13/16	13/16	22	30	28	55.5	36.5		630	9136
TPPM01313P	1	1	27	36	33.5	63	40.5		420	6091
TPPM01414P	1.3/16	1.3/16	30	41	37.5	67	41.5		420	6091
TPPM01515P	1.7/16	1.7/16	36	46	41.5	71	42		420	6091
TPPM02121P	1.11/16	1.11/16	41	50	44.5	75.5	42		280	4060
TPPM03232P	2	2	48	60	49	79.5	42		280	4060

ADAPTOR SWIVEL FEMALE ORFS- MALE ORFS (1)

RIDUZIONE DIRITTA FEMMINA GIREVOLE ORFS MASCHIO ORFS
 ADAPTATEUR FEMELLE TOURNANTE ORFS - MÂLE ORFS
 REDUZIERUNG IG-ORFS / AG - ORFS
 ADAPTADOR HEMBRA GIRATORIA ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

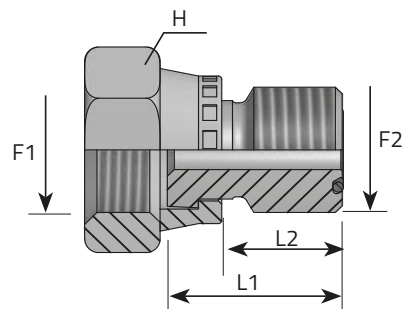

Code	Thread		Dimensions			Pressure		
	F1	F2	H	L1	L2	form	Bar	Psi
	in	in	mm	mm	mm			
AFGO09M006	11/16	9/16	22	20	10	X	630	9136
AFGO11M006	13/16	9/16	24	22	10	Y	630	9136
AFGO13M006	1	9/16	30	23	10	Y	420	6091
AFGO14M006	1.3/16	9/16	36	25	10	Y	420	6091
AFGO15M006	1.7/16	9/16	41	26	10	Y	420	6091
AFGO21M006	1.11/16	9/16	50	26.5	10	Y	280	4060
AFGO32M006	2	9/16	60	26.5	10	Y	280	4060
AFGO11M009	13/16	11/16	24	23	11	X	630	9136
AFGO13M009	1	11/16	30	24	11	Y	420	6091
AFGO14M009	1.3/16	11/16	36	26	11	Y	420	6091
AFGO15M009	1.7/16	11/16	41	27	11	Y	420	6091
AFGO21M009	1.11/16	11/16	50	27.5	11	Y	280	4060
AFGO32M009	2	11/16	60	27.5	11	Y	280	4060

X: Version with crimped nut

Versione con dado pressato

Y: Version with slip back nut


Versione con dado sfilabile

ADAPTOR SWIVEL FEMALE ORFS- MALE ORFS (2)

RIDUZIONE DIRITTA FEMMINA GIREVOLE ORFS MASCHIO ORFS
 ADAPTATEUR FEMELLE TOURNANTE ORFS - MÂLE ORFS
 REDUZIERUNG IG-ORFS / AG - ORFS
 ADAPTADOR HEMBRA GIRATORIA ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

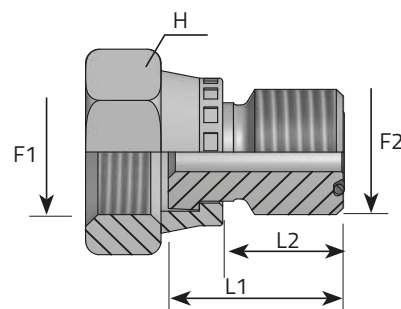

	Code	Thread		Dimensions			Pressure		
		F1	F2	H	L1	L2	form	Bar	Psi
		in	in	mm	mm	mm			
	AFGO13M011	1	13/16	30	25.5	13	Y	420	6091
	AFGO14M011	1.3/16	13/16	36	27.5	13	Y	420	6091
*	AFGO14M015	1.3/16	1.7/16	36	58	17.5	z	420	6091
	AFGO15M011	1.7/16	13/16	41	29	13	Y	420	6091
*	AFGO15M021	1.7/16	1.11/16	41	60.5	17.5	z	420	6091
	AFGO21M011	1.11/16	13/16	50	29.5	13	Y	280	4060
	AFGO32M011	2	13/16	60	29.5	13	Y	280	4060
	AFGO14M013	1.3/16	1	36	29.5	15.5	X	420	6091
	AFGO14M015	1.3/16	1.7/16	41	32	17.5	X	420	6091
	AFGO15M013	1.7/16	1	41	32	15.5	Y	420	6091
	AFGO15M021	1.7/16	1.11/16	46	33.5	17.5	X	420	6091
	AFGO21M013	1.11/16	1	50	32	15.5	Y	280	4060
	AFGO32M013	2	1	60	32	15.5	Y	280	4060
	AFGO15M014	1.7/16	1.3/16	41	33	17	Y	420	6091
	AFGO21M014	1.11/16	1.3/16	50	33.5	17	Y	280	4060
	AFGO32M014	2	1.3/16	60	33.5	17	Y	280	4060
	AFGO21M015	1.11/16	1.7/16	50	34	17.5	X	280	4060
	AFGO32M015	2	1.7/16	60	34	17.5	Y	280	4060
	AFGO32M021	2	1.11/16	60	34	17.5	Y	280	4060

X: Version with crimped nut

Versione con dado pressato

Y: Version with slip back nut

Versione con dado sfilabile

Z: Double hexagon version


Versione con doppio esagono

90° ADAPTOR FEMALE ORFS – MALE ORFS

GOMITO A 90° FEMMINA ORFS DADO PRESSATO MASCHIO ORFS
 ADAPTATEUR COUDE 90° FEMELLE ORFS – MÂLE ORFS
 ADAPTER 90° IG-ORFS / AG-ORFS
 CODO 90° HEMBRA ORFS – MACHO ORFS

F1 ORFS

F2 ORFS

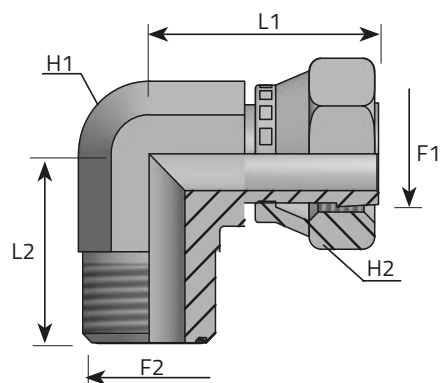


	Code	Thread		Dimensions				Pressure	
		F1	F2	H1	H2	L1	L2	Bar	Psi
		in	in	mm	mm	mm	mm		
	LM006FG006	9/16	9/16	14	17	26.5	21.5	420	6091
	LM009FG009	11/16	11/16	19	22	29	25	420	6091
	LM011FG011	13/16	13/16	22	24	38	28	420	6091
	LM013FG013	1	1	27	30	41	33.5	420	6091
	LM014FG014	1.3/16	1.3/16	30	36	46.5	37.5	420	6091
	LM015FG015	1.7/16	1.7/16	36	41	53.5	41.5	380	5511
	LM021FG021	1.11/16	1.11/16	41	50	58	44.5	280	4060
	LM032FG032	2	2	48	60	61	49	280	4060

45° ADAPTOR FEMALE ORFS – MALE ORFS

GOMITO A 45° FEMMINA ORFS DADO PRESSATO MASCHIO ORFS
 ADAPTATEUR COUDE 45° FEMELLE ORFS – MÂLE ORFS
 ADAPTER 45° IG-ORFS / AG-ORFS
 CODO 45° HEMBRA ORFS – MACHO ORFS

F1 ORFS

F2 ORFS

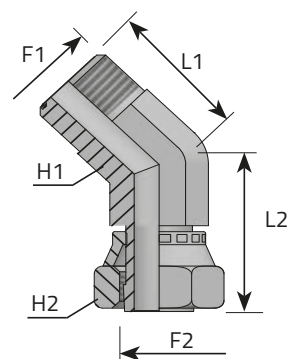


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
QMO06FG006	9/16	9/16	14	17	16	26.5	630	9136
QMO09FG009	11/16	11/16	19	22	19	29	630	9136
QMO11FG011	13/16	13/16	22	24	20.5	38	630	9136
QMO13FG013	1	1	27	30	23.5	41	420	6091
QMO14FG014	1.3/16	1.3/16	30	36	26	46.5	420	6091
QMO15FG015	1.7/16	1.7/16	36	41	30	53.5	420	6091
QMO21FG021	1.11/16	1.11/16	41	50	32	58	280	4060
QMO32FG032	2	2	48	60	37	61	280	4060

RUN FEMALE ORFS-TEE MALE ORFS -TEE MALE ORFS

RACCORDO A "T" MASCHIO ORFS FEMMINA ORFS AL BRACCIO
 ADAPTATEUR TÊ RENVERSÉ MÂLE ORFS - FEMELLE ORFS
 ADAPTER T-STÜCK 2 X AG-ORFS / 1 X IG-ORFS
 ADAPTADOR EN L MACHO ORFS – MACHO ORFS

F1 ORFS

F2 ORFS

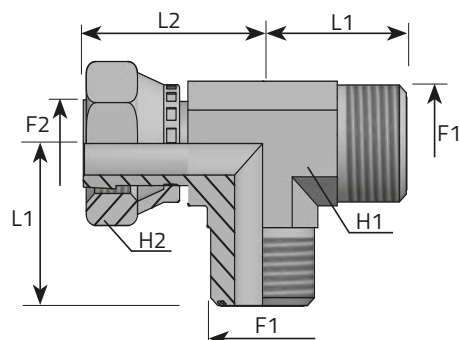


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
TM006FG006B	9/16	9/16	14	17	21.5	26.5	630	9136
TM009FG009B	11/16	11/16	19	22	25	29	630	9136
TM011FG011B	13/16	13/16	22	24	28	38	630	9136
TM013FG013B	1	1	27	30	33.5	41	420	6091
TM014FG014B	1.3/16	1.3/16	30	36	37.5	46.5	420	6091
TM015FG015B	1.7/16	1.7/16	36	41	41.5	53.5	420	6091
TM021FG021B	1.11/16	1.11/16	41	50	44.5	58	280	4060
TM032FG032B	2	2	48	60	49	61	280	4060

BRANCH TEE MALE ORFS -TEE MALE ORFS-FEMALE ORFS

RACCORDO A "T" MASCHIO ORFS FEMMINA ORFS AL PIEDE
 ADAPTATEUR TÉ RENVERSÉ MÂLE ORFS - FEMELLE ORFS
 ADAPTER T-STÜCK 2 X AG-ORFS / 1 X IG-ORFS
 ADAPTADOR EN T MACHO ORFS – MACHO ORFS

F1 ORFS

F2 ORFS

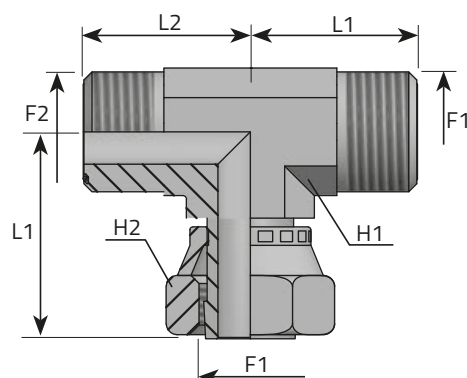

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
TMO06FG006P	9/16	9/16	14	17	21.5	26.5	630	9136
TMO09FG009P	11/16	11/16	19	22	25	29	630	9136
TMO11FG011P	13/16	13/16	22	24	28	38	630	9136
TMO13FG013P	1	1	27	30	33.5	41	420	6091
TMO14FG014P	1.3/16	1.3/16	30	36	37.5	46.5	420	6091
TMO15FG015P	1.7/16	1.7/16	36	41	41.5	53.5	420	6091
TMO21FG021P	1.11/16	1.11/16	41	50	44.5	58	280	4060
TMO32FG032P	2	2	48	60	49	61	280	4060

ADAPTOR FEMALE ORFS - FEMALE ORFS

ADATTATORE DIRITTO FEMMINA ORFS FEMMINA ORFS DADO PRESSATO


ADAPTATEUR FEMELLE ORFS - FEMELLE ORFS

ADAPTER IG-ORFS/IG-ORFS

ADAPTADOR HEMBRA ORFS - HEMBRA ORFS

F1 ORFS

F2 ORFS

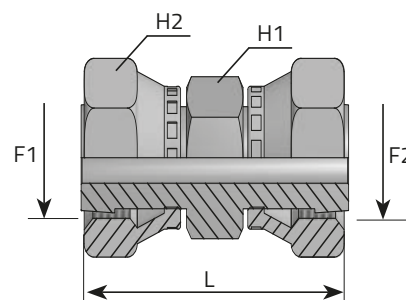


	Code	Thread		Dimensions			Pressure	
		F1	F2	H1	H2	L	Bar	Psi
		in	in	mm	mm	mm		
	AFG006	9/16	9/16	17	17	39.5	630	9136
	AFG009	11/16	11/16	19	22	45	630	9136
	AFG011	13/16	13/16	22	24	51.5	630	9136
	AFG013	1	1	27	30	61.5	420	6091
	AFG014	1.3/16	1.3/16	32	36	68	420	6091
	AFG015	1.7/16	1.7/16	41	41	71.5	420	6091
	AFG021	1.11/16	1.11/16	46	50	73.5	280	4060
	AFG032	2	2	55	60	75	280	4060

ADAPTOR MALE ORFS - MALE BSPP FORM E (1)

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO GAS CILINDRICO FORMA E
 ADAPTATEUR MÂLE ORFS - MÂLE BSPP FORME E
 ADAPTER AG-ORFS /AG ZÖLLIG FORM E
 ADAPTADOR MACHO ORFS - MACHO BSPP FORMA E

F1 ORFS


F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

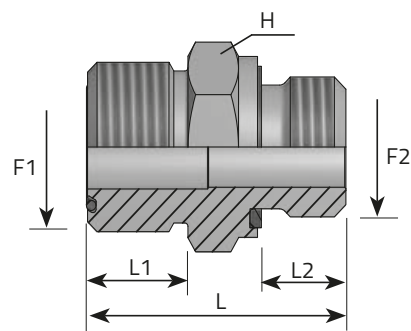

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
	in	in	mm	mm	mm	mm		
AM006MG02R	9/16"	1/8"	17	10	8	25.5	630	9136
AM009MG04R	11/16"	1/4"	19	11	12	32	630	9136
AM011MG06R	13/16"	3/8"	22	13	12	34.5	630	9136
AM013MG08R	1"	1/2"	27	15.5	14	41	420	6091
AM014MG12R	1.3/16"	3/4"	32	17	16	46	420	6091
AM015MG16R	1.7/16"	1"	41	17.5	18	50	420	6091
AM021MG20R	1.11/16"	1.1/4"	50	17.5	20	54	280	4060
AM032MG24R	2"	1.1/2"	55	17.5	22	57.5	280	4060
AM006MG04R	9/16"	1/4"	19	10	12	31	630	9136
AM006MG06R	9/16"	3/8"	22	10	12	31.5	630	9136
AM006MG08R	9/16"	1/2"	27	10	14	35.5	630	9136
AM009MG02R	11/16"	1/8"	19	11	8	27.5	630	9136
AM009MG06R	11/16"	3/8"	22	11	12	32.5	630	9136
AM009MG08R	11/16"	1/2"	27	11	14	36.5	630	9136
AM009MG12R	11/16"	3/4"	32	11	16	40	420	6091
AM011MG04R	13/16"	1/4"	22	13	12	41	630	9136
AM011MG08R	13/16"	1/2"	27	13	14	44	630	9136
AM011MG12R	13/16"	3/4"	32	13	16	46	420	6091

ADAPTOR MALE ORFS - MALE BSPP FORM E (2)

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO GAS CILINDRICO FORMA E
 ADAPTATEUR MÂLE ORFS - MÂLE BSPP FORME E
 ADAPTER AG-ORFS /AG ZÖLLIG FORM E
 ADAPTADOR MACHO ORFS - MACHO BSPP FORMA E

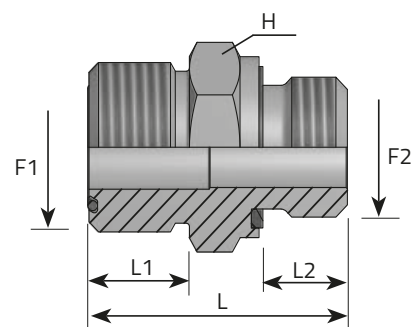

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilindrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
	in	in	mm	mm	mm	mm		
AM013MG04R	1	1/4	27	15.5	12	38	420	6091
AM013MG06R	1	3/8	27	15.5	12	38.5	420	6091
AM013MG12R	1	3/4	32	15.5	16	44.5	420	6091
AM013MG16R	1	1	41	15.5	18	48	420	6091
AM014MG04R	1.3/16	1/4	32	17	12	41	420	6091
AM014MG08R	1.3/16	1/2	32	17	14	44	420	6091
AM014MG16R	1.3/16	1	41	17	18	49.5	420	6091
AM014MG20R	1.3/16	1.1/4	50	17	20	53.5	420	6091
AM015MG04R	1.7/16	1/4	41	17.5	12	43	420	6091
AM015MG06R	1.7/16	3/8	41	17.5	12	43.5	420	6091
AM015MG12R	1.7/16	3/4	41	17.5	16	48	420	6091
AM015MG20R	1.7/16	1.1/4	50	17.5	20	54	420	6091
AM015MG24R	1.7/16	1.1/2	55	17.5	22	57.5	280	4060
AM021MG16R	1.11/16	1	46	17.5	18	52	280	4060
AM021MG24R	1.11/16	1.1/2	55	17.5	22	57.5	280	4060

ADAPTOR MALE ORFS - MALE BSPP WITH 60° CONE

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO BSPP SVASATO 60°


ADAPTATEUR MÂLE ORFS - MÂLE BSPP AVEC CÔNE 60°

ADAPTER AG-ORFS/AG-BSPP MIT 60° KONUS

ADAPTADOR MACHO ORFS -MACHO BSPP CON CONO 60°

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilíndrica

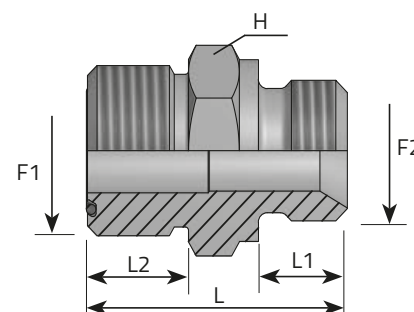

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
	in	in	mm	mm	mm	mm		
AMO06MG02SV	9/16	1/8	17	8	10	25.5	400	5801
AMO09MG04SV	11/16	1/4	19	11	11	32	400	5801
AMO11MG06SV	13/16	3/8	22	12	13	34.5	400	5801
AMO13MG08SV	1	1/2	27	14	15.5	41	350	5076
AMO14MG12SV	1.3/16	3/4	32	16	17	46	315	4568
AMO15MG16SV	1.7/16	1	41	19	17.5	51	250	3625
AMO21MG20SV	1.11/16	1.1/4	50	20	17.5	54	200	2900
AMO32MG24SV	2	1.1/2	55	23	17.5	57.5	160	2320
AMO06MG04SV	9/16	1/4	19	11	10	31	400	5801
AMO06MG06SV	9/16	3/8	22	12	10	31.5	400	5801
AMO09MG06SV	11/16	3/8	22	12	11	32.5	400	5801
AMO09MG08SV	11/16	1/2	27	14	11	36.5	350	5076
AMO11MG04SV	13/16	1/4	22	11	13	35	400	5801
AMO11MG08SV	13/16	1/2	27	14	13	38.5	350	5076
AMO11MG12SV	13/16	3/4	32	16	13	42	315	4568
AMO13MG06SV	1	3/8	27	12	15.5	38.5	400	5801
AMO13MG10SV	1	5/8	30	16	15.5	43	350	5076
AMO13MG12SV	1	3/4	32	16	15.5	44.5	315	4568
AMO14MG08SV	1.3/16	1/2	32	14	17	44	350	5076
AMO14MG16SV	1.3/16	1	41	19	17	50.5	250	3625
AMO15MG12SV	1.7/16	3/4	41	16	17.5	51	315	4568
AMO15MG20SV	1.7/16	1.1/4	50	20	17.5	54	200	2900

ADAPTOR MALE ORFS - FIXED FEMALE BSPP

ADATTATORE DIRITTO MASCHIO ORFS FEMMINA FISSA BSPP


ADAPTATEUR MÂLE ORFS - FEMELLE FIXE BSPP

ADAPTER AG-ORFS/ IG-ZÖLLIG

ADAPTADOR MACHO ORFS - HEMBRA FIJA BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilíndrica

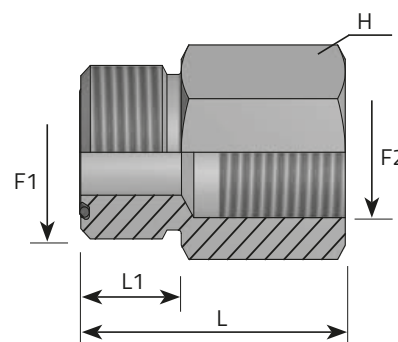


Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L	Bar	Psi
	in	in	mm	mm	mm		
AM006FFG04	9/16	1/4	19	10	31	630	9136
AM009FFG04	11/16	1/4	19	11	32	630	9136
AM011FFG06	13/16	3/8	24	13	35	630	9136
AM013FFG08	1	1/2	30	15.5	41,5	420	6091
AM014FFG12	1.3/16	3/4	36	17	46	420	6091
AM015FFG16	1.7/16	1	41	17.5	48,5	420	6091
AM021FFG20	1.11/16	1.1/4	55	17.5	53,5	280	4060
AM032FFG24	2	1.1/2	60	17.5	55,5	280	4060
AM011FFG04	13/16	1/4	22	13	34	630	9136
AM014FFG08	1.3/16	1/2	32	17	43	420	6091

STRAIGHT BULKHEAD ADAPTOR MALE ORFS - FEMALE BSPP

ADATTATORE PASSAPARETE MASCHIO ORFS FEMMINA BSPP
 PASSE-CLOISON MÂLE ORFS- FEMELLE BSPP
 SCHOTTADAPTER AG-ORFS / IG- BSPP
 PASATABIQUE MACHO ORFS - HEMBRA BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

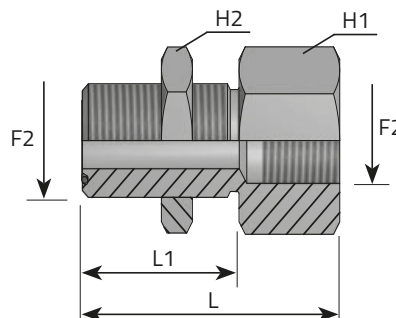


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L	Bar	Psi
	in	in	mm	mm	mm	mm		
APPMO06FFG04	9/16	1/4	22	22	31.5	52.5	630	9136
APPMO09FFG04	11/16	1/4	27	27	34	55	630	9136
APPMO11FFG06	13/16	3/8	30	30	36.5	58.5	630	9136
APPMO13FFG08	1	1/2	36	36	40.5	66.5	420	6091
APPMO14FFG12	1.3/16	3/4	41	41	41.5	70.5	420	6091
APPMO15FFG16	1.7/16	1	46	46	42	73	420	6091
APPMO21FFG20	1.11/16	1.1/4	50	50	42	78	280	4060
APPMO32FFG24	2	1.1/2	60	60	42	80	280	4060

ORFS SWIVEL NUT - BSPP FEMALE

PRESA DI PRESSIONE CON DADO GIREVOLE ORFS FEMMINA BSPP
 ÉCROU TOURNANTE ORFS - FEMELLE BSPP -
 ORFS GIRATORIA MÜTTER - AG BSPP
 TUERCA ORFS -HEMBRA BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

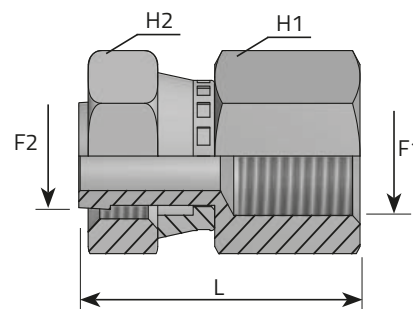


	Code	Thread		Dimensions			Pressure	
		F1	F2	H1	H2	L	Bar	Psi
		in	in	mm	mm	mm		
	AFGO06FFG04	9/16	1/4	19	17	39	630	9136
	AFGO09FFG04	11/16	1/4	19	22	41	630	9136
	AFGO11FFG04	13/16	1/4	19	24	43	630	9136
	AFGO13FFG04	1	1/4	24	30	46	420	6091
	AFGO14FFG04	1.3/16	1/4	30	36	47.5	420	6091
	AFGO15FFG04	1.7/16	1/4	36	41	48	420	6091
	AFGO21FFG04	1.11/16	1/4	-	50	-	280	4060
	AFGO32FFG04	2	1/4	-	60	-	280	4060

ADAPTOR FEMALE ORFS - MALE BSPP WITH 60° CONE

ADATTATORE DIRITTO FEMMINA ORFS MASCHIO BSPP SVASATO 60°
 ADAPTATEUR FEMELLE ORFS - MÂLE BSPP AVEC CÔNE 60°
 ADAPTER IG-ORFS/AG-BSPP MIT 60° KONUS
 ADAPTADOR HEMBRA ORFS - MACHO BSPP CON CONO 60°

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

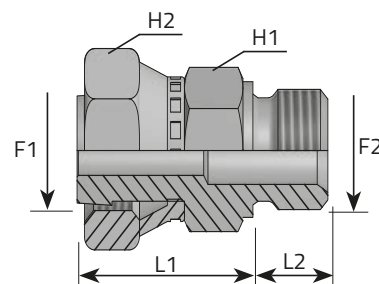

	Code	Thread		Dimensions				Pressure	
		F1	F2	H1	H2	L1	L2	Bar	Psi
		in	in	mm	mm	mm	mm		
	AFGO06MG02SV	9/16	1/8	14	17	25,00	8	400	5801
	AFGO09MG04SV	11/16	1/4	19	22	29,00	12	400	5801
	AFGO11MG06SV	13/16	3/8	22	24	35,50	12	400	5801
	AFGO13MG08SV	1	1/2	27	30	39,50	14	350	5076
	AFGO14MG12SV	1.3/16	3/4	32	36	41,50	16	315	4568
	AFGO15MG16SV	1.7/16	1	41	41	46,00	18	250	3625
	AFGO21MG20SV	1.11/16	1.1/4	50	50	44,50	20	200	2900
	AFGO32MG24SV	2	1.1/2	55	60	49,50	22	160	2320
	AFGO06MG04SV	9/16	1/4	19	17	25,50	12	400	5801
	AFGO06MG06SV	9/16	3/8	22	17	27,50	12	400	5801
	AFGO09MG06SV	11/16	3/8	22	22	29,50	12	400	5801
	AFGO09MG08SV	11/16	1/2	27	22	30,50	14	350	5076
	AFGO11MG04SV	13/16	1/4	19	24	33,50	11	400	5801
	AFGO11MG08SV	13/16	1/2	27	24	37,00	14	350	5076
	AFGO11MG12SV	13/16	3/4	32	24	40,50	16	315	4568
	AFGO13MG06SV	1	3/8	24	30	39,00	12	400	5801
	AFGO13MG10SV	1	5/8	30	30	39,00	16	350	5076
	AFGO13MG12SV	1	3/4	32	30	41,00	16	315	4568
	AFGO14MG08SV	1.3/16	1/2	30	36	43,50	14	350	5076
	AFGO14MG16SV	1.3/16	1	41	36	44,00	19	250	3625
	AFGO15MG12SV	1.7/16	3/4	36	41	46,00	16	315	4568
	AFGO15MG20SV	1.7/16	1.1/4	50	41	47,50	20	200	2900

ADAPTOR FEMALE ORFS - MALE BSPP FORM E

ADATTATORE DIRITTO FEMMINA ORFS MASCHIO BSPP FORMA E


ADAPTATEUR FEMELLE ORFS - MÂLE BSPP FORME E

ADAPTER IG-ORFS/AG-BSPP FORM E

ADAPTADOR HEMBRA ORFS - MACHO BSPP FORMA E

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilíndrica

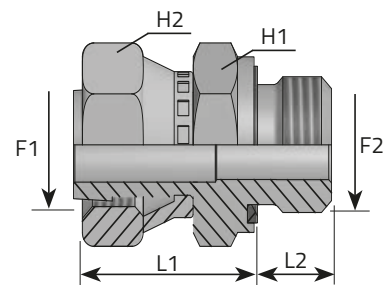


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
AFGO06MG02R	9/16	1/8	17	17	26.5	8	630	9136
AFGO09MG04R	11/16	1/4	19	22	28.5	12	630	9136
AFGO11MG06R	13/16	3/8	22	24	35.5	12	630	9136
AFGO13MG08R	1	1/2	27	30	38	14	420	6091
AFGO14MG12R	1.3/16	3/4	32	36	41.5	16	420	6091
AFGO15MG16R	1.7/16	1	41	41	49	18	420	6091
AFGO21MG20R	1.11/16	1.1/4	50	50	49	20	280	4060
AFGO32MG24R	2	1.1/2	55	60	49	22	280	4060
AFGO06MG04R	9/16	1/4	19	17	26.5	12	630	9136
AFGO09MG06R	11/16	3/8	22	22	32.5	12	630	9136
AFGO11MG08R	13/16	1/2	27	24	34	14	630	9136
AFGO14MG20R	1.3/16	1.1/4	50	36	48	20	420	6091

ADAPTOR MALE ORFS - METRIC MALE FORM E (1)

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO METRICO FORMA E
 ADAPTATEUR MÂLE ORFS - MÂLE MÉTRIQUE FORME E
 ADAPTER AG-ORFS/AG-METRISCHFORM E
 ADAPTADOR MACHO ORFS - MACHO MÉTRICOFORMA E

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

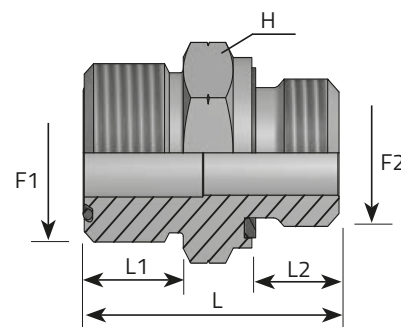


Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
	in	mm	mm	mm	mm	mm		
AMO06MM12R	9/16	12X1.5	17	10	12	30	630	9136
AMO09MM14R	11/16	14X1.5	19	11	12	32	630	9136
AMO11MM18R	13/16	18X1.5	24	13	12	34,5	630	9136
AMO13MM22R	1	22X1.5	27	15.5	14	41	420	6091
AMO14MM27R	1.3/16	27X2	32	17	16	46	420	6091
AMO15MM33R	1.7/16	33X2	41	17.5	18	50	420	6091
AMO21MM42R	1.11/16	42X2	50	17.5	20	54	280	4060
AMO32MM48R	2	48X1.5	55	17.5	22	57,5	280	4060
AMO06MM10R	9/16	10X1	17	10	8	25,5	350	5076
AMO06MM14R	9/16	14X1.5	19	10	12	31	630	9136
AMO09MM12R	11/16	12X1.5	19	11	12	32	630	9136
AMO09MM16R	11/16	16X1.5	22	11	12	34	630	9136
AMO09MM18R	11/16	18X1.5	24	11	12	32,5	630	9136
AMO11MM14R	13/16	14X1.5	22	13	12	35	630	9136
AMO11MM16R	13/16	16X1.5	22	13	12	34,5	630	9136
AMO11MM22R	13/16	22X1.5	27	13	14	38,5	630	9136

ADAPTOR MALE ORFS - METRIC MALE FORM E (2)

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO METRICO FORMA E
 ADAPTATEUR MÂLE ORFS - MÂLE MÉTRIQUE FORME E
 ADAPTER AG-ORFS/AG-METRISCHFORM E
 ADAPTADOR MACHO ORFS - MACHO MÉTRICOFORMA E

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

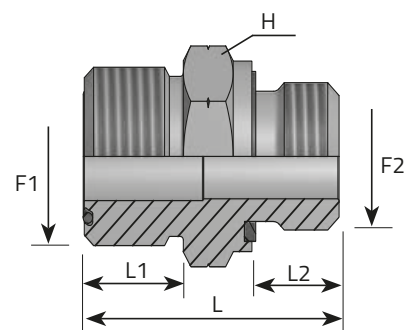


Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
	in	mm	mm	mm	mm	mm		
AM013MM18R	1	18x1.5	27	15.5	12	38,5	420	6091
AM013MM27R	1	27x2	32	15.5	16	44,5	420	6091
AM014MM22R	1.3/16	22x1.5	32	17	14	44	420	6091
AM014MM33R	1.3/16	33x2	41	17	18	49,5	420	6091
AM015MM27R	1.7/16	27x2	41	17.5	16	48	420	6091
AM015MM42R	1.7/16	42x2	50	17.5	20	54	420	6091
AM021MM33R	1.11/16	33x2	46	17.5	18	52	280	4060
AM021MM48R	1.11/16	48x2	55	17.5	22	57,5	280	4060

ADAPTOR MALE ORFS - METRIC MALE

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO METRICO CON O-RING
 ADAPTATEUR MÂLE ORFS - MÂLE MÉTRIQUE AVEC O-RING
 ADAPTER AG-ORFS/AG-METRISCH MIT O.R.
 ADAPTADOR MACHO ORFS -MACHO MÉTRICO

F1 ORFS


F2 Metrisch, Metrico, Metric, Métrique, Métrico

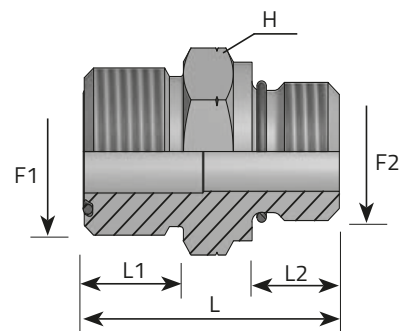

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
	in	mm	mm	mm	mm	mm		
AMO09MM14	11/16	14x1.5	19	11	13.5	35	630	9136
AMO09MM12	11/16	12X1.5	22	13	13.5	32	630	9136
AMO11MM22	13/16	22X1.5	22	13	17	38.5	630	9136
AMO14MM22	1.3/16	22X1.5	32	17	17	44	630	9136
AMO15MM27	1.7/16	27X2	41	17.5	19	48	420	6091
AMO15MM33	1.7/16	33X2	41	17.5	22	50	420	6091
AMO21MM42	1.11/16	42X2	50	17.5	22	50	280	6091

ORFS SWIVEL NUT - METRIC FEMALE

PRESA DI PRESSIONE CON DADO GIREVOLE ORFS FEMMINA METRICA
 ÉCROU TOURNANTE ORFS - FEMELLE MÉTRIQUE
 ORFS MÜTTER - AG METRISCH
 TUERCA GIRATORIA ORFS - HEMBRA MÉTRICA

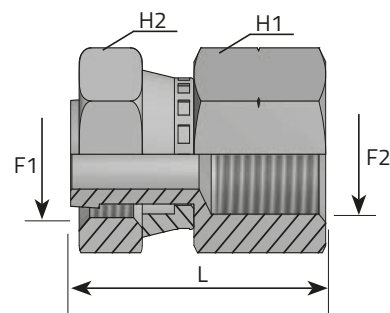

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico


	Code	Thread		Dimensions			Pressure	
		F1	F2	H1	H2	L	Bar	Psi
		in	mm	mm	mm	mm		
	AFGO06FFM10	9/16	10x1	19	17	39	630	9136
	AFGO09FFM10	11/16	10x1	19	22	41	630	9136
	AFGO11FFM10	13/16	10x1	19	24	43	630	9136
	AFGO13FFM10	1	10x1	24	30	40	420	6091
	AFGO14FFM10	1.3/16	10x1	-	36	-	420	6091
	AFGO15FFM10	1.7/16	10x1	-	41	-	420	6091
	AFGO21FFM10	1.11/16	10x1	-	50	-	280	4060
	AFGO32FFM10	2	10x1	-	60	-	280	4060

ADAPTOR FEMALE ORFS - MALE METRIC FORM E

ADATTATORE DIRITTO FEMMINA ORFS MASCHIO METRICO FORMA E
 ADAPTATEUR FEMELLE ORFS - MÂLE MÉTRIQUE FORME E
 ADAPTER IG-ORFS/AG-METRISCH FORM E
 ADAPTADOR HEMBRA ORFS - MACHO MÉTRICO FORMA E

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

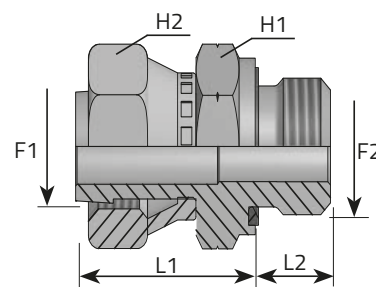


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	mm	mm	mm	mm	mm		
AFGO06MM12R	9/16	12X1.5	17	17	26.5	12	630	9136
AFGO09MM14R	11/16	14X1.5	19	22	28.5	12	630	9136
AFGO11MM18R	13/16	18X1.5	24	24	35.5	12	630	9136
AFGO13MM22R	1	22X1.5	27	30	38	14	420	6091
AFGO14MM27R	1.3/16	27X2	32	36	41.5	16	420	6091
AFGO15MM33R	1.7/16	33X2	41	41	49	18	420	6091
AFGO21MM42R	1.11/16	42X2	50	50	49	20	280	4060
AFGO32MM48R	2	48X2	55	60	49	22	280	4060
AFGO06MM10R	9/16	10X1	17	17	26.5	8	350	5076
AFGO09MM16R	11/16	16X1.5	22	22	28.5	12	630	9136
AFGO11MM16R	13/16	16X1.5	22	24	34.5	12	630	9136
AFGO13MM18R	1	18X1.5	27	30	38	12	420	6091
AFGO14MM22R	1.3/16	22X1.5	32	36	41.5	14	420	6091
AFGO15MM27R	1.7/16	27X2	41	41	49	16	420	6091

ADAPTOR MALE ORFS - MALE UNF (1)

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO UNF
 ADAPTATEUR MÂLE ORFS - MÂLE UNF
 ADAPTER AG-ORFS/AG-UNF
 ADAPTADOR MACHO ORFS - MACHO UNF

F1 ORFS

F2 UNF

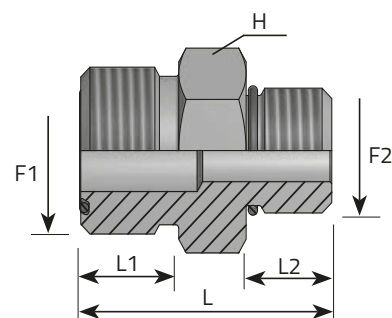


Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
	in	in	mm	mm	mm	mm		
AM006MU04	9/16	7/16	17	10	11	29	630	9136
AM009MU06	11/16	9/16	19	11	12	32	630	9136
AM011MU08	13/16	3/4	22	13	14	36,5	630	9136
AM013MU10	1	7/8	27	15.5	16	43	420	6091
AM014MU12	1.3/16	1.1/16	32	17	18.5	48,5	420	6091
AM015MU16	1.7/16	1.5/16	41	17.5	18.5	50,5	420	6091
AM021MU20	1.11/16	1.5/8	46	17.5	18.5	52	280	4060
AM032MU24	2	1.7/8	55	17.5	18.5	54	280	4060
AM006MU05	9/16	1/2	17	10	11	29	630	9136
AM006MU06	9/16	9/16	19	10	12	31	630	9136
AM006MU08	9/16	3/4	22	10	14	33,5	630	9136
AM009MU04	11/16	7/16	19	11	11	31	630	9136
AM009MU05	11/16	1/2	19	11	11	31	630	9136
AM009MU08	11/16	3/4	22	11	14	34,5	630	9136
AM009MU10	11/16	7/8	27	11	16	38,5	630	9136
AM009MU12	11/16	1.1/16	32	11	18.5	42,5	420	6091

ADAPTOR MALE ORFS - MALE UNF (2)

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO UNF
 ADAPTATEUR MÂLE ORFS - MÂLE UNF
 ADAPTER AG-ORFS/AG-UNF
 ADAPTADOR MACHO ORFS -MACHO UNF

F1 ORFS

F2 UNF

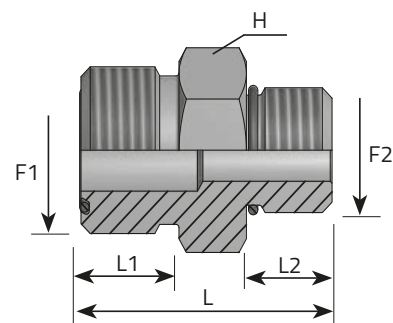

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
	in	in	mm	mm	mm	mm		
AMO11MU06	13/16	9/16	22	13	12	34,5	630	9136
AMO11MU10	13/16	7/8	27	13	16	40,5	630	9136
AMO11MU12	13/16	1.1/16	32	13	18.5	44,5	420	6091
AMO11MU16	13/16	1.5/16	41	13	18.5	46	420	6091
AMO13MU08	1	3/4	27	15.5	14	41	420	6091
AMO13MU12	1	1.1/16	32	15.5	18.5	47	420	6091
AMO14MU08	1.3/16	3/4	32	17	14	44	420	6091
AMO14MU10	1.3/16	7/8	32	17	16	46	420	6091
AMO14MU16	1.3/16	1.5/16	41	17	18.5	50	420	6091
AMO15MU12	1.7/16	1.1/16	41	17.5	18.5	50,5	420	6091
AMO15MU20	1.7/16	1.5/8	46	17.5	15	48.5	280	4060
AMO21MU16	1.11/16	1.5/16	46	17.5	18.5	52	280	4060
AMO21MU24	1.11/16	1.7/8	55	17.5	18.5	54	280	4060
AMO32MU20	2	1.5/8	55	17.5	15	50.5	280	4060


ADAPTOR FEMALE ORFS - MALE UNF

ADATTATORE DIRITTO FEMMINA ORFS DADO PRESSATO MASCHIO UNF

ADAPTATEUR FEMELLE ORFS - MÂLE UNF

ADAPTER IG-ORFS/AG-UNF

ADAPTADOR HEMBRA ORFS - MACHO UNF

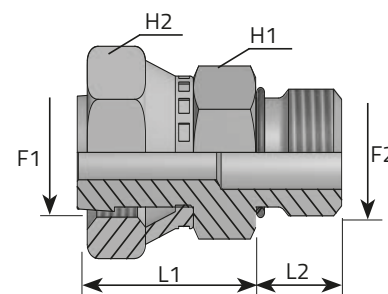

F1 ORFS

F2 UNF


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
AFGO06MU04	9/16	7/16	17	17	26.5	11	630	9136
AFGO09MU06	11/16	9/16	19	22	28.5	12	630	9136
AFGO11MU08	13/16	3/4	22	24	35.5	14	630	9136
AFGO13MU10	1	7/8	27	30	38	16	420	6091
AFGO14MU12	1.3/16	1.1/16	32	36	41.5	18.5	420	6091
AFGO15MU16	1.7/16	1.5/16	41	41	49	18.5	420	6091
AFGO21MU20	1.11/16	1.5/8	46	50	49	18.5	280	4060
AFGO32MU24	2	1.7/8	55	60	49	18.5	280	4060
AFGO09MU04	11/16	7/16	19	22	28.5	11	630	9136
AFGO09MU08	11/16	3/4	22	22	32.5	11	630	9136
AFGO11MU10	13/16	7/8	27	24	34	16	630	9136
AFGO13MU08	1	3/4	27	30	38	14	420	6091
AFGO13MU12	1	1.1/16	32	30	39	18.5	420	6091
AFGO14MU10	1.3/16	7/8	32	36	41.5	16	420	6091
AFGO14MU16	1.3/16	1.5/16	41	36	48	18.5	420	6091

ADAPTOR MALE ORFS - MALE NPT

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO NPT
 ADAPTATEUR MÂLE ORFS - MÂLE NPT
 ADAPTER AG-ORFS/AG-NPT
 ADAPTADOR MACHO ORFS -MACHO NPT

F1 ORFS


F2 NPT

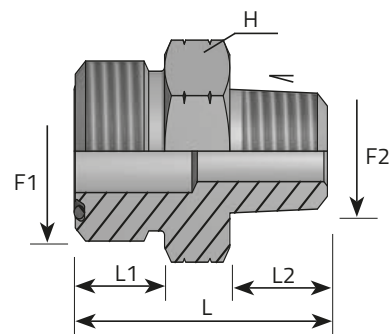

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
	in	in	mm	mm	mm	mm		
AMO06MN02	9/16	1/8	17	10	10	27,5	420	6091
AMO09MN04	11/16	1/4	19	11	14,5	34,5	630	9136
AMO11MN06	13/16	3/8	22	13	14,5	37	630	9136
AMO13MN08	1	1/2	27	15,5	19	46	420	6091
AMO14MN12	1.3/16	3/4	32	17	19	49	420	6091
AMO15MN16	1.7/16	1	41	17,5	24	56	420	6091
AMO21MN20	1.11/16	1.1/4	46	17,5	25	59	280	4060
AMO32MN24	2	1.1/2	55	17,5	26	61,5	280	4060
AMO06MN04	9/16	1/4	17	10	14,5	32	630	9136
AMO06MN06	9/16	3/8	17	10	14,5	32	630	9136
AMO09MN06	11/16	3/8	19	11	14,5	34,5	630	9136
AMO09MN08	11/16	1/2	22	11	19	39,5	630	9136
AMO11MN04	13/16	1/4	22	13	14,5	37	630	9136
AMO11MN08	13/16	1/2	22	13	19	41,5	630	9136
AMO11MN12	13/16	3/4	27	13	19	43,5	420	6091
AMO13MN06	1	3/8	27	15,5	14,5	41,5	420	6091
AMO13MN12	1	3/4	27	15,5	19	46	420	6091
AMO14MN08	1.3/16	1/2	32	17	19	49	420	6091
AMO14MN16	1.3/16	1	36	17	24	54	420	6091
AMO15MN12	1.7/16	3/4	41	17,5	19	51	420	6091
AMO21MN16	1.11/16	1	46	17,5	24	58	280	4060
AMO32MN20	2	1.1/4	55	17,5	25	60,5	280	4060

90° ADAPTOR MALE ORFS - MALE NPT

GOMITO 90° MASCHIO ORFS MASCHIO NPT
 ADAPTEUR COUDE 90° MÂLE ORFS - MÂLE NPT
 ADAPTER 90° GSK AG-ORFS/AG-NPT
 CODO 90° MACHO ORFS - MACHO NPT



F1 ORFS

F2 NPT


Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L2	Bar	Psi
	in	in	mm	mm	mm		
LM006MN02	9/16	1/8	14	21.5	20	420	6091
LM009MN04	11/16	1/4	19	25	31	630	9136
LM011MN06	13/16	3/8	22	28	31	630	9136
LM013MN08	1	1/2	27	33.5	37.5	420	6091
LM014MN12	1.3/16	3/4	30	37.5	40	420	6091
LM015MN16	1.7/16	1	36	41.5	50	420	6091
LM021MN20	1.11/16	1.1/4	41	52	60	280	4060
LM032MN24	2	1.1/2	48	49	67	280	4060
LM006MN04	9/16	1/4	14	21.5	28	630	9136
LM006MN06	9/16	3/8	19	23.5	31	630	9136
LM009MN06	11/16	3/8	19	25	31	630	9136
LM009MN08	11/16	1/2	22	28	37.5	630	9136
LM011MN04	13/16	1/4	22	28	31	630	9136
LM011MN08	13/16	1/2	22	30	37.5	630	9136
LM011MN12	13/16	3/4	27	31.5	40	420	6091
LM013MN06	1	3/8	27	33.5	33	420	6091
LM013MN12	1	3/4	27	33.5	40	420	6091
LM014MN08	1.3/16	1/2	30	37.5	40	420	6091
LM014MN16	1.3/16	1	33	38	50	420	6091
LM015MN12	1.7/16	3/4	36	41.5	45.5	420	6091
LM021MN16	1.11/16	1	41	52	59	280	4060
LM032MN20	2	1.1/4	48	49	66	280	4060

45° ADAPTOR MALE ORFS - MALE NPT

GOMITO 45° MASCHIO ORFS MASCHIO NPT
 ADAPTATEUR COUDE 45° MÂLE ORFS - MÂLE NPT
 ADAPTER 45° GSK AG-ORFS/AG-NPT
 CODO 45° MACHO ORFS - MACHO NPT

F1 ORFS

F2 NPT

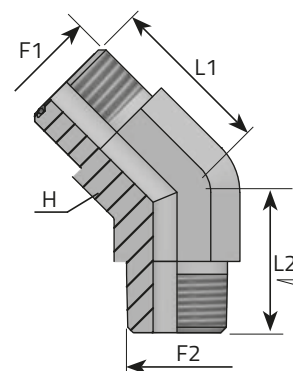

Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L2	Bar	Psi
	in	in	mm	mm	mm		
QMO06MN02	9/16	1/8	14	16	16.5	420	6091
QMO09MN04	11/16	1/4	19	19	24	630	9136
QMO11MN06	13/16	3/8	22	20.5	24	630	9136
QMO13MN08	1	1/2	27	23.5	30.5	420	6091
QMO14MN12	1.3/16	3/4	30	26	30.5	420	6091
QMO15MN16	1.7/16	1	36	30	38	420	6091
QMO21MN20	1.11/16	1.1/4	41	32	42	280	4060
QMO32MN24	2	1.1/2	48	37	45	280	4060
QMO06MN04	9/16	1/4	14	16	22	630	9136
QMO06MN06	9/16	3/8	19	17.5	24	630	9136
QMO09MN06	11/16	3/8	19	19	24	630	9136
QMO09MN08	11/16	1/2	22	20	29.5	630	9136
QMO11MN04	13/16	1/4	22	20.5	24	630	9136
QMO11MN08	13/16	1/2	22	21	29.5	630	9136
QMO11MN12	13/16	3/4	27	21.5	30.5	420	6091
QMO13MN06	1	3/8	27	23.5	27	420	6091
QMO13MN12	1	3/4	27	23.5	30.5	420	6091
QMO14MN08	1.3/16	1/2	30	26	30.5	420	6091
QMO14MN16	1.3/16	1	33	29.5	38	420	6091
QMO15MN12	1.7/16	3/4	36	30	33	420	6091
QMO21MN16	1.11/16	1	41	32	41	280	4060
QMO32MN20	2	1.1/4	48	37	44	280	4060

ADAPTOR MALE ORFS - FIXED FEMALE NPT

ADATTATORE DIRITTO MASCHIO ORFS FEMMINA FISSA NPT


ADAPTATEUR MÂLE ORFS - FEMELLE FIXE NPT

ADAPTER AG-ORFS/ IG-NPT

ADAPTADOR MACHO ORFS - HEMBRA FIJA NPT

F1 ORFS

F2 NPT

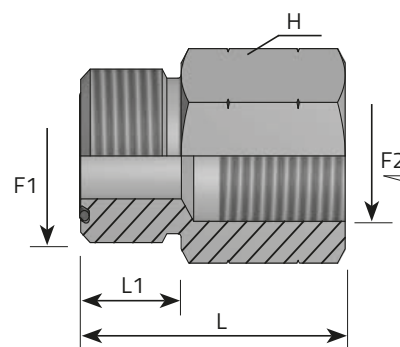

Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L	Bar	Psi
	in	in	mm	mm	mm		
AM006FFN04	9/16	1/4	19	10	31,5	630	9136
AM009FFN04	11/16	1/4	19	11	32,5	630	9136
AM011FFN06	13/16	3/8	24	13	36	630	9136
AM013FFN08	1	1/2	30	15.5	44	420	6091
AM014FFN12	1.3/16	3/4	36	17	47	420	6091
AM015FFN16	1.7/16	1	41	17.5	54	420	6091
AM021FFN20	1.11/16	1.1/4	55	17.5	56,5	280	4060
AM032FFN24	2	1.1/2	60	17.5	56,5	280	4060
AM011FFN04	13/16	1/4	22	13	34,5	630	9136
AM014FFN08	1.3/16	1/2	32	17	45,5	420	6091

STRAIGHT BULKHEAD ADAPTOR MALE ORFS - FEMALE NPT

ADATTATORE PASSAPARETE MASCHIO ORFS FEMMINA NPT


PASSE-CLOISON MÂLE ORFS- FEMELLE NPT

SCHOTTADAPTER AG-ORFS / IG- NPT

PASATABIQUE MACHO ORFS - HEMBRA NPT

F1 ORFS

F2 NPT

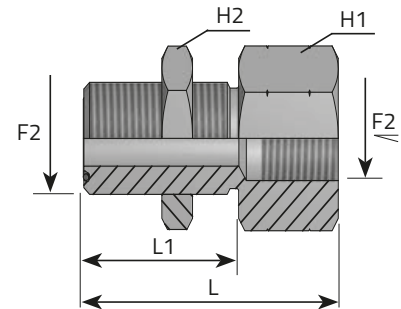


Code	Thread		Dimensions				Pressure	
	F1	F2	H	H1	L1	L	Bar	Psi
	in	in	mm	mm	mm	mm		
APPM006FFN04	9/16	1/4	22	22	31.5	53	630	9136
APPM009FFN04	11/16	1/4	27	27	34	55.5	630	9136
APPM011FFN06	13/16	3/8	30	30	36.5	59	630	9136
APPM013FFN08	1	1/2	36	36	40.5	69	420	6091
APPM014FFN12	1.3/16	3/4	41	41	41.5	71.5	420	6091
APPM015FFN16	1.7/16	1	46	46	42	78.5	420	6091
APPM021FFN20	1.11/16	1.1/4	50	50	42	81	280	4060
APPM032FFN24	2	1.1/2	60	60	42	81	280	4060

ADAPTOR MALE ORFS - MALE DIN

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO DIN
 ADAPTATEUR MÂLE ORFS - MÂLE DIN
 ADAPTER AG-ORFS/AG-DIN
 ADAPTADOR MACHO ORFS -MACHO DIN

F1 ORFS

F2 DIN

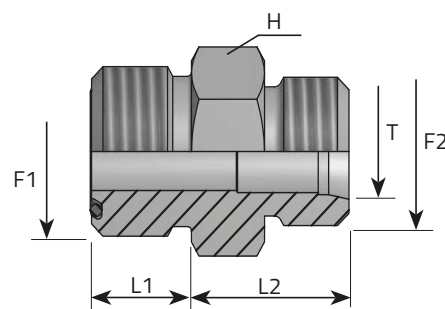


Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	T	Bar	Psi
	in	in	mm	mm	mm	mm		
AM006ME06L.1	9/16	12X1.5	17	10	10.5	6	315	4568
AM006ME08L.1	9/16	14X1.5	17	10	10.5	8	315	4568
AM009ME10L.1	11/16	16X1.5	19	11	13	10	315	4568
AM011ME12L.1	13/16	18X1.5	22	13	13.5	12	315	4568
AM013ME15L.1	1	22X1.5	27	15.5	16.5	15	315	4568
AM014ME18L.1	1.3/16	26X1.5	32	17	17.5	18	315	4568
AM015ME22L.1	1.7/16	30X2	41	17.5	21	22	160	2320
AM021ME28L.1	1.11/16	36X2	46	17.5	23	28	160	2320
AM032ME35L.1	2	45X2	55	17.5	23.5	35	160	2320
AM032ME42L.1	2	52X2	55	17.5	23	42	160	2320
AM006ME06S.1	9/16	14X1.5	17	10	12.5	6	630	9136
AM006ME08S.1	9/16	16X1.5	17	10	12.5	8	630	9136
AM009ME10S.1	11/16	18X1.5	19	11	13.5	10	630	9136
AM011ME12S.1	13/16	20X1.5	22	13	14	12	630	9136
AM013ME14S.1	1	22X1.5	27	15.5	19.5	14	420	6091
AM013ME16S.1	1	24X1.5	27	15.5	20	16	400	5801
AM014ME20S.1	1.3/16	30X2	32	17	18.5	20	400	5801
AM015ME25S.1	1.7/16	36X2	41	17.5	20.5	25	400	5801
AM021ME30S.1	1.11/16	42X2	46	17.5	23	30	280	4060
AM032ME38S.1	2	52X2	55	17.5	24	38	280	4060

ADAPTOR MALE ORFS - FEMALE DIN (THRUST-WIRE NUT)

ADATTATORE DIRITTO MASCHIO ORFS FEMMINA DIN DADO SPINATO
 ADAPTATEUR MÂLE ORFS - FEMELLE DIN (ÉCROU À JONC)
 ADAPTER AG-ORFS/IG-DIN (GESTIFTETE ÜBERWURF MUTTER)
 ADAPTADOR MACHO ORFS - HEMBRA DIN (TUERCA CON SEGURO)

F1 ORFS

F2 DIN

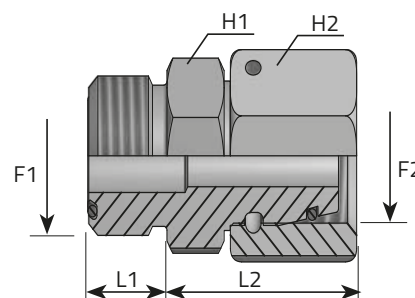

Code	Thread		Dimensions						Pressure	
	F1	F2	H1	H2	L1	L2	T		Bar	Psi
	in	mm	mm	mm	mm	mm	mm			
AMO06FE06L	9/16	12X1.5	17	14	10	24.5	6		315	4568
AMO06FE08L	9/16	14X1.5	17	17	10	24.5	8		315	4568
AMO09FE10L	11/16	16X1.5	19	19	11	26.5	10		315	4568
AMO11FE12L	13/16	18X1.5	22	22	13	27	12		315	4568
AMO13FE15L	1	22X1.5	27	27	15.5	31	15		315	4568
AMO14FE18L	1.3/16	26X1.5	32	32	17	33.5	18		315	4568
AMO15FE22L	1.7/16	30X2	41	36	17.5	36	22		160	2320
AMO21FE28L	1.11/16	36X2	46	41	17.5	39	28		160	2320
AMO32FE35L	2	45X2	55	50	17.5	45	35		160	2320
AMO32FE42L	2	52X2	55	60	17.5	45	42		160	2320
AMO06FE06S	9/16	14X1.5	17	17	10	24.5	6		630	9136
AMO06FE08S	9/16	16X1.5	17	19	10	25	8		630	9136
AMO09FE10S	11/16	18X1.5	19	22	11	27	10		630	9136
AMO11FE12S	13/16	20X1.5	22	24	13	27.5	12		630	9136
AMO13FE14S	1	22X1.5	27	27	15.5	32.5	14		420	6091
AMO13FE16S	1	24X1.5	27	30	15.5	35	16		400	5801
AMO14FE20S	1.3/16	30X2	32	36	17	39	20		400	5801
AMO15FE25S	1.7/16	36X2	41	46	17.5	43	25		400	5801
AMO21FE30S	1.11/16	42X2	46	50	17.5	47.5	30		280	4060
AMO32FE38S	2	52X2	55	60	17.5	51	38		280	4060

ADAPTOR MALE ORFS - MALE JIC

ADATTATORE DIRITTO MASCHIO ORFS MASCHIO JIC (SAE J514)


ADAPTATEUR MÂLE ORFS - MÂLE JIC

ADAPTER AG-ORFS/AG-JIC

ADAPTADOR MACHO ORFS - MACHO JIC

F1 ORFS

F2 JIC

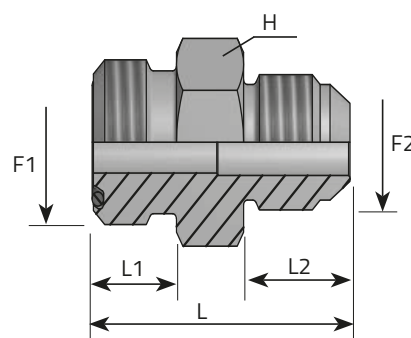


Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
	in	in	mm	mm	mm	mm		
AM006MJ04	9/16	7/16	17	10	14	31.5	450	6526
AM009MJ06	11/16	9/16	19	11	14.1	34	350	5076
AM011MJ08	13/16	3/4	22	13	16.7	39	350	5076
AM013MJ10	1	7/8	27	15.5	19.3	46.5	350	5076
AM014MJ12	1.3/16	1.1/16	32	17	21.9	52	350	5076
AM015MJ16	1.7/16	1.5/16	41	17.5	23.1	55	290	4205
AM021MJ20	1.11/16	1.5/8	46	17.5	24.3	58.5	240	3480
AM032MJ24	2	1.7/8	55	17.5	27.5	63	240	3480
AM009MJ05	11/16	1/2	19	11	14	34	450	6526

ADAPTOR MALE ORFS - FEMALE JIC

ADATTATORE DIRITTO MASCHIO ORFS FEMMINA JIC
 ADAPTATEUR MÂLE ORFS - FEMELLE JIC
 ADAPTER AG-ORFS/IG-JIC
 ADAPTADOR MACHO ORFS -HEMBRA JIC

F1 ORFS

F2 JIC

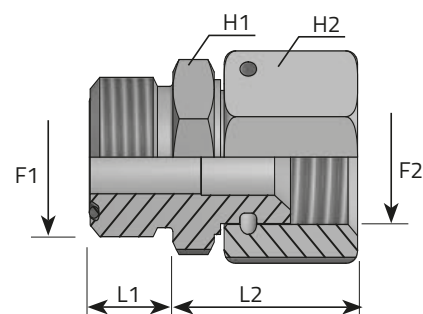

Code	Thread		Dimensions				Pressure		
	F1	F2	H1	H2	L1	L2	form	Bar	Psi
	in	in	mm	mm	mm	mm			
AM006FGJ04	9/16	7/16	17	17	10	25	X	450	6526
AM009FGJ06	11/16	9/16	19	19	11	29	X	350	5076
AM011FGJ08	13/16	3/4	22	22	13	31.5	X	350	5076
AM013FGJ10	1	7/8	27	27	15.5	37.5	X	350	5076
AM014FGJ12	1.3/16	1.1/16	32	32	17	39	Y	350	5076
AM015FGJ16	1.7/16	1.5/16	41	41	17.5	44.5	Y	290	4205
AM021FGJ20	1.11/16	1.5/8	46	50	17.5	45.5	Y	240	3480
AM032FGJ24	2	1.7/8	55	60	17.5	55.5	Y	240	3480
AM009FGJ05	11/16	1/2	19	17	11	28	Y	450	6526

Y: Version with crimped nut

Versione con dado pressato

X: Version with thrust-wire nut

Versione con dado spinato


ADAPTOR FEMALE ORFS - MALE JIC

ADATTATORE DIRITTO FEMMINA ORFS MASCHIO JIC (SAE J514)

ADAPTATEUR FEMELLE ORFS - MÂLE JIC

ADAPTER IG-ORFS/AG-JIC

ADAPTADOR HEMBRA ORFS - MACHO JIC

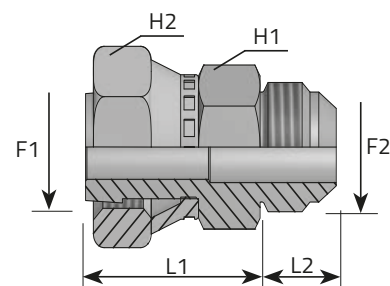

F1 ORFS

F2 JIC

	Code	Thread		Dimensions				Pressure	
		F1	F2	H1	H2	L1	L2	Bar	Psi
		in	in	mm	mm	mm	mm		
	AFGO06MJ04	9/16	7/16	17	17	23.5	14	450	6526
	AFGO09MJ06	11/16	9/16	22	22	26.9	14.1	350	5076
	AFGO11MJ08	13/16	3/4	24	24	30.3	16.7	350	5076
	AFGO13MJ10	1	7/8	30	30	36.7	19.3	350	5076
	AFGO14MJ12	1.3/16	1.1/16	36	36	40.6	21.9	350	5076
	AFGO15MJ16	1.7/16	1.5/16	41	41	42.9	23.1	290	4205
	AFGO21MJ20	1.11/16	1.5/8	50	50	44.7	24.3	240	3480
	AFGO32MJ24	2	1.7/8	60	60	46.5	27.5	240	3480
	AFGO09MJ05	11/16	1/2	22	22	27	14	450	6526

WELDING ADAPTOR MALE ORFS (1)


ADATTATORE DIRITTO A SILDARE MASCHIO ORFS CON TASCA
 ADAPTATEUR À SOUDER ORFS
 SCHWEISSVERBINDUNG FÜR HYDRAULIKROHRE MIT VERGROSSETEM
 LOCHANSATZ- AG-ORFS
 ADAPTADOR MACHO SOLDABLE OR

F1 ORFS

T/T1 Ø

N.b.: No zinc-plated Parts

Elementi non sottoposti al trattamento di zincatura

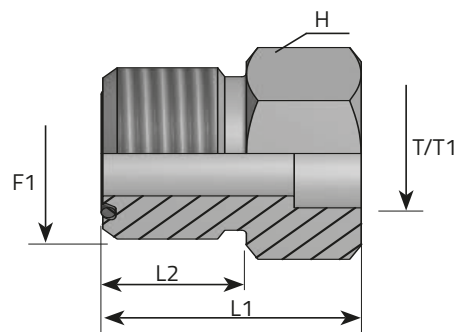

Code	Thread	Dimensions					Pressure	
		F1	H	L1	L2	T	T1	
		in	mm	mm	mm	mm	in	Bar Psi
AMNSO06T6	9/16		17	22	10	6	1/4	630 9136
AMNSO09T10	11/16		19	23	11	10	3/8	630 9136
AMNSO11T12	13/16		22	24.5	13	12	1/2	630 9136
AMNSO13T16	1		27	28	15.5	16	5/8	420 6091
AMNSO14T20	1.3/16		32	33.5	17	20	3/4	420 6091
AMNSO15T25	1.7/16		41	38.5	17.5	25	1	420 6091
AMNSO21T30	1.11/16		46	38.5	17.5	30	1.1/4	280 4060
AMNSO32T38	2		55	38.5	17.5	38	1.1/2	280 4060
AMNSO06T8	9/16		17	22	10	8	5/16	630 9136
AMNSO06T10	9/16		17	22	10	10	3/8	630 9136
AMNSO06T12	9/16		19	22	10	12	1/2	630 9136
AMNSO09T6	11/16		19	23	11	6	1/4	630 9136
AMNSO09T8	11/16		19	23	11	8	5/16	630 9136
AMNSO09T12	11/16		19	23	11	12	1/2	630 9136
AMNSO09T14	11/16		22	23.5	11	14	-	420 6091
AMNSO09T15	11/16		22	23.5	11	15	-	420 6091
AMNSO09T16	11/16		22	23.5	11	16	5/8	420 6091
AMNSO11T6	13/16		22	24.5	13	6	1/4	630 9136
AMNSO11T8	13/16		22	24.5	13	8	5/16	630 9136
AMNSO11T10	13/16		22	24.5	13	10	3/8	630 9136
AMNSO11T14	13/16		22	25	13	14	-	420 6091
AMNSO11T15	13/16		22	25	13	15	-	420 6091

WELDING ADAPTOR MALE ORFS (2)


ADATTATORE DIRITTO A SILDARE MASCHIO ORFS CON TASCA
 ADAPTATEUR À SOUDER ORFS
 SCHWEISSVERBINDUNG FÜR HYDRAULIKROHRE MIT VERGROSSETEM
 LOCHANSATZ- AG-ORFS
 ADAPTADOR MACHO SOLDABLE OR

F1 ORFS

T/T1 Ø

N.b.: No zinc-plated Parts

Elementi non sottoposti al trattamento di zincatura

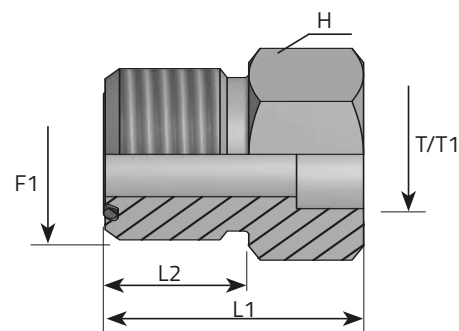

Code	Thread	Dimensions					Pressure	
	F1	H	L1	L2	T	T1	Bar	Psi
	in	mm	mm	mm	mm	in		
AMNSO11T16	13/16	22	25	13	16	5/8	420	6091
AMNSO11T18	13/16	27	28.5	13	18	-	420	6091
AMNSO11T20	13/16	27	28.5	13	20	3/4	420	6091
AMNSO11T22	13/16	32	28.5	13	22	7/8	420	6091
AMNSO11T25	13/16	32	30	13	25	1	420	6091
AMNSO13T10	1	27	27.5	15.5	10	3/8	420	6091
AMNSO13T12	1	27	27.5	15.5	12	1/2	420	6091
AMNSO13T14	1	27	28	15.5	14	-	420	6091
AMNSO13T15	1	27	28	15.5	15	-	420	6091
AMNSO13T18	1	27	31.5	15.5	18	-	420	6091
AMNSO13T20	1	27	31.5	15.5	20	3/4	420	6091
AMNSO14T12	1.3/16	32	29.5	17	12	1/2	420	6091
AMNSO14T14	1.3/16	32	30	17	14	-	420	6091
AMNSO14T15	1.3/16	32	30	17	15	-	420	6091
AMNSO14T16	1.3/16	32	30	17	16	5/8	420	6091
AMNSO14T18	1.3/16	32	33.5	17	18	-	420	6091
AMNSO14T22	1.3/16	32	33.5	17	22	7/8	420	6091
AMNSO14T25	1.3/16	32	35	17	25	1	420	6091
AMNSO15T12	1.7/16	41	33	17.5	12	1/2	420	6091
AMNSO15T14	1.7/16	41	33.5	17.5	14	-	420	6091
AMNSO15T15	1.7/16	41	33.5	17.5	15	-	420	6091
AMNSO15T16	1.7/16	41	33.5	17.5	16	5/8	420	6091

WELDING ADAPTOR MALE ORFS (3)

ADATTATORE DIRITTO A SALDARE MASCHIO ORFS CON TASCA

ADAPTATEUR À SOUDER ORFS

SCHWEISSVERBINDUNG FÜR HYDRAULIKROHRE MIT VERGROSSETEM

LOCHANSATZ- AG-ORFS


ADAPTADOR MACHO SOLDABLE OR

F1 ORFS

T/T1 Ø

N.b.: No zinc-plated Parts


Elementi non sottoposti al trattamento di zincatura

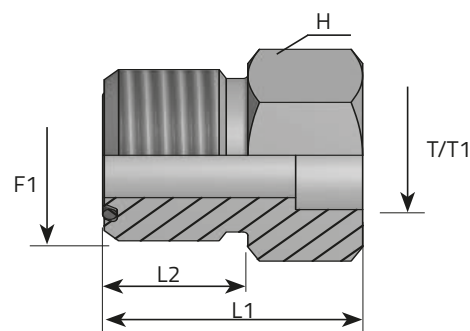

	Code	Thread	Dimensions					Pressure	
			H	L1	L2	T	T	Bar	Psi
		F1							
		in	mm	mm	mm	mm	in		
	AMNSO15T18	1.7/16	41	37	17.5	18	-	420	6091
	AMNSO15T20	1.7/16	41	37	17.5	20	3/4	420	6091
	AMNSO15T22	1.7/16	41	37	17.5	22	7/8	420	6091
	AMNSO15T28	1.7/16	41	38.5	17.5	28	-	280	4060
	AMNSO15T30	1.7/16	41	38.5	17.5	30	1.1/4	280	4060
	AMNSO15T32	1.7/16	41	38.5	17.5	32	-	280	4060
	AMNSO21T18	1.11/16	46	37	17.5	18	-	280	4060
	AMNSO21T20	1.11/16	46	37	17.5	20	3/4	280	4060
	AMNSO21T22	1.11/16	46	37	17.5	22	7/8	280	4060
	AMNSO21T25	1.11/16	46	38.5	17.5	25	1	280	4060
	AMNSO21T28	1.11/16	46	38.5	17.5	28	-	280	4060
	AMNSO21T32	1.11/16	46	38.5	17.5	32	-	280	4060
	AMNSO21T35	1.11/16	50	38.5	17.5	35	-	280	4060
	AMNSO21T38	1.11/16	50	38.5	17.5	38	1.1/2	280	4060
	AMNSO32T25	2	55	38.5	17.5	25	1	280	4060
	AMNSO32T28	2	55	38.5	17.5	28	-	280	4060
	AMNSO32T30	2	55	38.5	17.5	30	1.1/4	280	4060
	AMNSO32T32	2	55	38.5	17.5	32	-	280	4060
	AMNSO32T35	2	55	38.5	17.5	35	-	280	4060

WELDING ADAPTOR MALE ORFS

CODOLO A SILDARE
 EMBOUT À SOUDER
 SCHWEISSVERBINDUNG FÜR HYDRAULIKROHRE
 EMPALME SOLDABLE

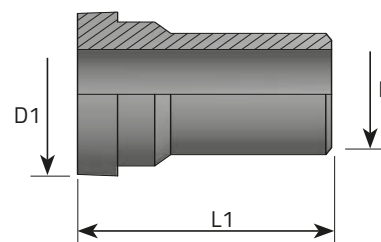

N.b.: No zinc-plated Parts

Elementi non sottoposti al trattamento di zincatura

Code	Thread	Dimensions				Pressure	
		D1	L1	D	D	Bar	Psi
	F1						
	in	mm	mm	in	mm		
TO06W		12.75	25	1/4	6	630	9136
TO10W		15.75	26	3/8	10	630	9136
TO12W		18.9	26	1/2	12	630	9136
TO16W		23.45	32	5/8	16	420	6091
TO20W		17.85	37	3/4	20	420	6091
TO25W		34.2	42	1	25	420	6091
TO30W		40.55	44	1.1/4	30	280	4060
TO38W		48.5	49	1.1/2	38	280	4060
TO08W		15.75	25	5/16	8	630	9136
TO14W		23.45	32	-	14	420	6091
TO15W		23.45	32	-	15	420	6091
TO18W		17.85	37	-	18	420	6091
TO22W		34.2	37	7/8	22	420	6091
TO28W		40.55	44	-	28	280	4060
TO32W		40.55	44	-	32	280	4060
TO35W		48.5	44	-	35	280	4060


90° ADAPTOR MALE ORFS - BUTT WELD

GOMITO 90° MASCHIO ORFS ESTREMITÀ A SALDARE
 ADAPTATEUR COUDE 90° À SOUDER MÂLE ORFS
 ADAPTER ANSCHWEISSWINKEL 90° GSK – AG-ORFS
 ADAPTADOR CODO 90° SOLDABLE MACHO ORFS

F1 ORFS

N.b.: No zinc-plated Parts

Elementi non sottoposti al trattamento di zincatura

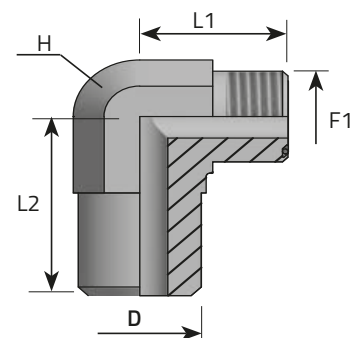

Code	Thread		Dimensions			Pressure	
	F1	D	H	L1	L2	Bar	Psi
	in	mm	mm	mm	mm		
LM006W6	9/16	6	14	21.5	20	630	9136
LM009W10	11/16	10	19	25	25	630	9136
LM011W12	13/16	12	22	28	25	630	9136
LM013W16	1	16	27	33.5	33.5	420	6091
LM014W20	1.3/16	20	30	37.5	37.5	420	6091
LM015W25	1.7/16	25	36	41.5	42	420	6091
LM021W30	1.11/16	30	41	44.5	45	280	4060
LM032W38	2	38	48	49	61	280	4060
LM009W8	11/16	8	19	25	25	630	9136
LM013W14	1	14	27	33.5	33.5	420	6091
LM013W15	1	15	27	33.5	33.5	420	6091
LM014W18	1.3/16	18	30	37.5	37.5	420	6091
LM015W22	1.7/16	22	36	41.5	42	420	6091
LM021W28	1.11/16	28	41	44.5	45	280	4060
LM021W32	1.11/16	32	41	44.5	45	280	4060
LM032W35	2	35	48	49	61	280	4060


90° ADAPTOR ORFS - SIDE FEMALE TO WELD

GOMITO 90° FEMMINA ORFS ESTREMITÀ A SALDARE
 ADAPTATEUR COUDE 90° À SOUDER FEMÂLE ORFS
 ADAPTER ORFS ANSCHWEISSWINKEL 90° GSK
 ADAPTADOR ORFS CODO 90° HEMBRA SOLDABLE

F1 ORFS

N.b.: No zinc-plated Parts

Elementi non sottoposti al trattamento di zincatura




Code	Thread		Dimensions			Pressure	
	F1	D	H	L1	L2	Bar	Psi
	in	mm	mm	mm	mm		
LM006T6	9/16	6	14	21.5	20	630	9136
LM009T10	11/16	10	19	25	26	630	9136
LM011T12	13/16	12	22	30	27	630	9136
LM013T16	1	16	27	34	37	420	6091
LM014T20	1.3/16	20	30	37.5	32	420	6091
LM015T25	1.7/16	25	36	41.5	36.5	420	6091
LM021T30	1.11/16	30	41	52	48	280	4060
LM032T38	2	38	48	49	45	280	4060
LM009T8	11/16	8	19	25	25	630	9136
LM013T14	1	14	27	34	32	420	6091
LM013T15	1	15	27	34	32	420	6091
LM014T18	1.3/16	18	30	37.5	32	420	6091
LM015T22	1.7/16	22	36	41.5	37	420	6091
LM021T28	1.11/16	28	41	52	48	280	4060
LM021T32	1.11/16	32	41	52	48	280	4060
LM032T35	2	35	48	49.5	45	280	4060

90° ADJUSTABLE ADAPTOR MALE ORFS – MALE BSPP WITH O-RING (1)

GOMITO 90° MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
 ADAPTATEUR ORIENTABLE COUDE 90° MÂLE ORFS– MÂLE BSPP
 ADAPTER 90° GSK – AG-ORFS/ AGR-F MIT O.R. UND HALTER
 CODO 90° ORIENTABLE MACHO ORFS – MACHO BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilindrica

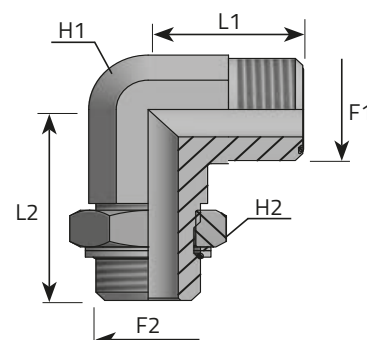


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
LM006MOG02	9/16	1/8	14	14	21.5	30	350	5076
LM009MOG04	11/16	1/4	19	19	25	37	315	4568
LM011MOG06	13/16	3/8	22	22	28	38	250	3625
LM013MOG08	1	1/2	27	27	33.5	48	250	3625
LM014MOG12	1.3/16	3/4	30	36	37.5	51.5	250	3625
LM015MOG16	1.7/16	1	36	41	41.5	58.5	200	2900
LM021MOG20	1.11/16	1.1/4	41	50	52	60.5	200	2900
LM032MOG24	2	1.1/2	48	55	49	64	160	2320
LM006MOG04	9/16	1/4	14	19	21.5	35	315	4568
LM006MOG06	9/16	3/8	19	22	23.5	38	250	3625
LM009MOG06	11/16	3/8	19	22	25	38	250	3625
LM009MOG08	11/16	1/2	22	27	28	48	250	3625
LM011MOG04	13/16	1/4	22	19	28	37	315	4568
LM011MOG08	13/16	1/2	22	27	30	48	250	3625
LM011MOG12	13/16	3/4	27	36	31.5	51.5	250	3625
LM013MOG04	1	1/4	27	19	33.5	42.5	315	4568
LM013MOG06	1	3/8	27	22	33.5	42.5	250	3625
LM013MOG12	1	3/4	27	36	33.5	51.5	250	3625

90° ADJUSTABLE ADAPTOR MALE ORFS – MALE BSPP WITH O-RING (2)

GOMITO 90° MASCHIO ORFS MASCHIO GAS CILINDRICO CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 90° MÂLE ORFS – MÂLE BSPP
 ADAPTER 90° GSK – AG-ORFS/ AGR-F MIT O.R. UND HALTER
 CODO 90° ORIENTABLE MACHO ORFS – MACHO BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

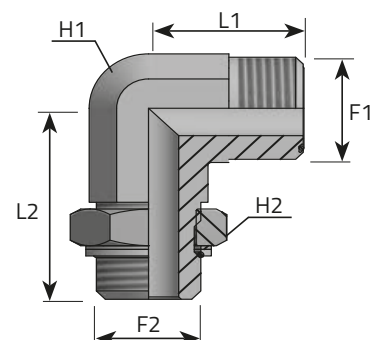


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
LM013MOG16	1	1	33	41	37	58.5	200	2900
LM014MOG04	1.3/16	1/4	30	19	37.5	43.5	315	4568
LM014MOG08	1.3/16	1/2	30	27	37.5	49	250	3625
LM014MOG16	1.3/16	1	33	41	42	55	200	2900
LM015MOG04	1.7/16	1/4	36	19	41.5	52	315	4568
LM015MOG12	1.7/16	3/4	36	36	41.5	57.5	250	3625
LM015MOG20	1.7/16	1.1/4	41	50	50	60.5	200	2900
LM021MOG16	1.11/16	1	41	41	52	60.5	200	2900
LM021MOG24	1.11/16	1.1/2	48	55	43.5	67	160	2320

90° ADJUSTABLE ADAPTOR MALE ORFS – METRIC MALE WITH O-RING

GOMITO 90° MASCHIO ORFS MASCHIO METRICO CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 90° MÂLE ORFS – MÂLE MÉTRIQUE
 AVEC RONDELLE D'ÉTANCHÉITÉ ET O-RING
 ADAPTER 90° GSK – AG-ORFS / AGR METRISCH MIT O.R. UND HATTE
 CODO 90° ORIENTABLE MACHO ORFS – MACHO MÉTRICO CON ARANDELA

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

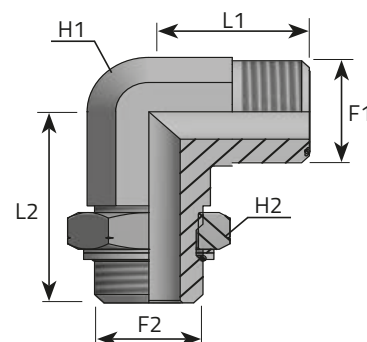


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	mm	mm	mm	mm	mm		
LM006MOM12R	9/16	12X1.5	14	17	21.5	33	315	4568
LM009MOM14R	11/16	14X1.5	19	19	25	35.5	315	4568
LM011MOM18R	13/16	18X1.5	22	24	28	41	315	4568
LM013MOM22R	1	22X1.5	27	27	33.5	49	250	3625
LM014MOM27R	1.3/16	27X2	30	32	37.5	55.5	250	3625
LM015MOM33R	1.7/16	33X2	36	41	41.5	59.5	160	2320
LM021MOM42R	1.11/16	42X2	41	50	52	63	160	2320
LM032MOM48R	2	48X2	48	55	49	68.5	160	2320
LM006MOM10R	9/16	10X1	14	14	21.5	30	315	4568
LM009MOM16R	11/16	16X1.5	19	22	25	37.5	315	4568
LM011MOM16R	13/16	16X1.5	22	22	28	37.5	315	4568
LM011MOM22R	13/16	22X1.5	27	27	31.5	49	250	3625
LM013MOM18R	1	18X1.5	27	24	33.5	47.5	315	4568
LM013MOM27R	1	27X2	27	32	33.5	55.5	250	3625
LM014MOM22R	1.3/16	22X1.5	30	27	37.5	49.5	250	3625
LM014MOM33R	1.3/16	33X2	33	41	38	59.5	160	2320
LM015MOM27R	1.7/16	27X2	36	32	41.5	59.5	250	3625
LM015MOM42R	1.7/16	42X2	41	50	44.5	63	160	2320
LM021MOM48R	1.11/16	48X2	48	55	52	68.5	160	2320

90° ADJUSTABLE ADAPTOR MALE ORFS – MALE UNF WITH O-RING (1)

GOMITO 90° MASCHIO ORFS MASCHIO UNF ORIENTABILE CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 90° MÂLE ORFS – MÂLE UNFADAPTER
 90° GSK-AG-ORFS / AG-UNF MIT O.R.
 CODO 90° ORIENTABLE MACHO ORFS – MACHO UNF CON O-RING

F1 ORFS

F2 UNF




Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
LM006MOU04	9/16	7/16	14	14	21.5	32.5	420	6091
LM009MOU06	11/16	9/16	19	17	25	37	420	6091
LM011MOU08	13/16	3/4	22	22	28	40.5	420	6091
LM013MOU10	1	7/8	27	27	33.5	50	420	6091
LM014MOU12	1.3/16	1.1/16	30	32	37.5	55	420	6091
LM015MOU16	1.7/16	1.5/16	36	41	41.5	59.5	380	5511
LM021MOU20	1.11/16	1.5/8	41	50	52	62	280	4060
LM032MOU24	2	1.7/8	48	55	49	66	280	4060
LM006MOU06	9/16	9/16	14	17	21.5	34.5	420	6091
LM006MOU08	9/16	3/4	19	22	23.5	40.5	420	6091
LM009MOU04	11/16	7/16	19	14	25	35	420	6091
LM009MOU08	11/16	3/4	19	22	25	40.5	420	6091
LM009MOU10	11/16	7/8	22	27	28	50	420	6091
LM009MOU12	11/16	1.1/16	27	32	29.5	55	420	6091
LM011MOU06	13/16	9/16	22	17	28	37	420	6091
LM011MOU10	13/16	7/8	22	27	30	50	420	6091
LM011MOU12	13/16	1.1/16	27	32	31.5	55	420	6091

90° ADJUSTABLE ADAPTOR MALE ORFS – MALE UNF WITH O-RING (2)

GOMITO 90° MASCHIO ORFS MASCHIO UNF ORIENTABILE CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 90° MÂLE ORFS – MÂLE UNFADAPTER
 90° GSK-AG-ORFS / AG-UNF MIT O.R.
 CODO 90° ORIENTABLE MACHO ORFS – MACHO UNF CON O-RING

F1 ORFS

F2 UNF




Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
LM013MOU08	1	3/4	27	22	33.5	46	420	6091
LM013MOU12	1	1.1/16	27	32	33.5	55	420	6091
LM014MOU08	1.3/16	3/4	30	22	37.5	47	420	6091
LM014MOU10	1.3/16	7/8	30	27	37.5	51	420	6091
LM014MOU16	1.3/16	1.5/16	33	41	38	59.5	380	5511
LM015MOU12	1.7/16	1.1/16	36	32	41.5	59	420	6091
LM015MOU20	1.7/16	1.5/8	41	50	44.5	62	280	4060
LM021MOU16	1.11/16	1.5/16	41	41	52	62	280	4060
LM021MOU24	1.11/16	1.7/8	48	55	52	66	280	4060
LM032MOU20	2	1.5/8	48	50	49	66	280	4060

45° ADJUSTABLE ADAPTOR MALE ORFS – MALE BSPP WITH O-RING (1)

GOMITO 45° MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
 ADAPTATEUR ORIENTABLE COUDE 45° MÂLE ORFS– MÂLE BSPP
 ADAPTER 45° GSK – AG-ORFS/ AGR-F MIT O.R. UND HALTER
 CODO 45° ORIENTABLE MACHO ORFS – MACHO BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

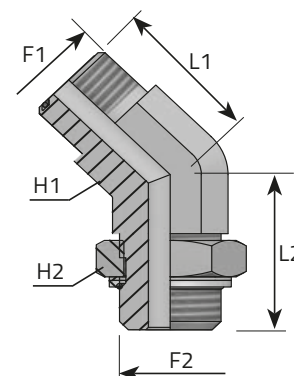


	Code	Thread		Dimensions				Pressure	
		F1	F2	H1	H2	L1	L2	Bar	Psi
		in	in	mm	mm	mm	mm		
	QM006MOG02	9/16	1/8	14	14	16	27.5	350	5076
	QM009MOG04	11/16	1/4	19	19	19	32.5	315	4568
	QM011MOG06	13/16	3/8	22	22	20.5	33.5	250	3625
	QM013MOG08	1	1/2	27	27	23.5	43	250	3625
	QM014MOG12	1.3/16	3/4	30	36	26	46.5	250	3625
	QM015MOG16	1.7/16	1	36	41	30	51	200	2900
	QM021MOG20	1.11/16	1.1/4	41	50	32	52.5	200	2900
	QM032MOG24	2	1.1/2	48	55	37	52.5	160	2320
	QM006MOG04	9/16	1/4	14	19	16	31.5	315	4568
	QM006MOG06	9/16	3/8	19	22	17.5	33.5	250	3625
	QM009MOG06	11/16	3/8	19	22	19	33.5	250	3625
	QM009MOG08	11/16	1/2	22	27	20	43	250	3625
	QM011MOG04	13/16	1/4	22	19	20.5	32.5	315	4568
	QM011MOG08	13/16	1/2	22	27	21	43	250	3625
	QM011MOG12	13/16	3/4	27	36	21.5	46.5	250	3625
	QM013MOG04	1	1/4	27	19	23.5	36	315	4568
	QM013MOG06	1	3/8	27	22	23.5	37	250	3625
	QM013MOG12	1	3/4	27	36	23.5	46.5	250	3625

45° ADJUSTABLE ADAPTOR MALE ORFS – MALE BSPP WITH O-RING (2)

GOMITO 45° MASCHIO ORFS MASCHIO GAS CILINDRICO CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 45° MÂLE ORFS– MÂLE BSPP
 ADAPTER 45° GSK – AG-ORFS/ AGR-F MIT O.R. UND HALTER
 CODO 45 ° ORIENTABLE MACHO ORFS – MACHO BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilindrica

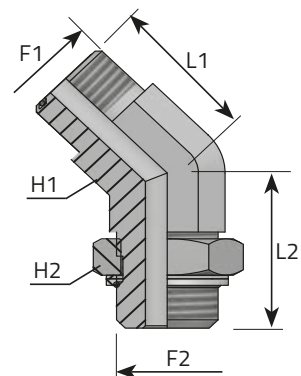


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
QMO13MOG16	1	1	33	41	28.5	51	200	2900
QMO14MOG04	1.3/16	1/4	30	19	26	40.5	315	4568
QMO14MOG08	1.3/16	1/2	30	27	26	44.5	250	3625
QMO14MOG16	1.3/16	1	33	41	29.5	51	200	2900
QMO15MOG04	1.7/16	1/4	36	19	30	41	315	4568
QMO15MOG12	1.7/16	3/4	36	36	30	47	250	3625
QMO15MOG20	1.7/16	1.1/4	41	50	32	52.5	200	2900
QMO21MOG16	1.11/16	1	41	41	32	52.5	200	2900
QMO21MOG24	1.11/16	1.1/2	48	55	35.5	52.5	160	2320

45° ADJUSTABLE ADAPTOR MALE ORFS – METRIC MALE WITH O-RING

GOMITO 45° MASCHIO ORFS MASCHIO METRICO CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 45° MÂLE ORFS – MÂLE MÉTRIQUE
 AVEC RONDELLE D'ÉTANCHÉITÉ ET O-RING
 ADAPTER 45° GSK – AG-ORFS / AGR METRISCH MIT O.R. UND HATTER
 CODO 45° ORIENTABLE MACHO ORFS – MACHO MÉTRICO CON ARANDELA

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

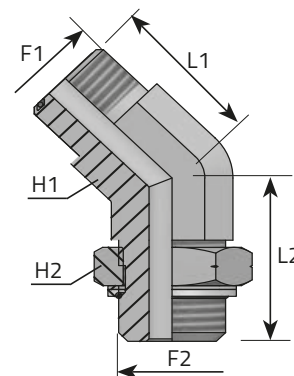


	Code	Thread		Dimensions				Pressure	
		F1	F2	H1	H2	L1	L2	Bar	Psi
		in	mm	mm	mm	mm	mm		
	QM006MOM12R	9/16	12X1.5	14	17	16	30	315	4568
	QM009MOM14R	11/16	14X1.5	19	19	19	31	315	4568
	QM011MOM18R	13/16	18X1.5	22	24	20.5	36.5	315	4568
	QM013MOM22R	1	22X1.5	27	27	23.5	44	250	3625
	QM014MOM27R	1.3/16	27X2	30	32	26	50	250	3625
	QM015MOM33R	1.7/16	33X2	36	41	30	52.5	250	3625
	QM021MOM42R	1.11/16	42X2	41	50	32	54	160	2320
	QM032MOM48R	2	48X2	48	55	37	56.5	160	2320
	QM006MOM10R	9/16	10X1	14	14	16	27	315	4568
	QM009MOM16R	11/16	16X1.5	19	22	19	33	315	4568
	QM011MOM16R	13/16	16X1.5	22	22	20.5	33	315	4568
	QM011MOM22R	13/16	22X1.5	27	27	21.5	44	250	3625
	QM013MOM18R	1	18X1.5	27	24	23.5	42.5	315	4568
	QM013MOM27R	1	27X2	27	32	23.5	50	250	3625
	QM014MOM22R	1.3/16	22X1.5	30	27	26	44	250	3625
	QM014MOM33R	1.3/16	33X2	33	41	29.5	52.5	160	2320
	QM015MOM27R	1.7/16	27X2	36	32	30	52.5	250	3625
	QM015MOM42R	1.7/16	42X2	41	50	32	54	160	2320
	QM021MOM48R	1.11/16	48X2	48	55	35.5	56.5	160	2320

45° ADJUSTABLE ADAPTOR MALE ORFS – MALE UNF WITH O-RING (1)

GOMITO 45° MASCHIO ORFS MASCHIO ORIENTABILE UNF CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 45° MÂLE ORFS – MÂLE UNF
 ADAPTER 45° GSK-AG-ORFS / AG-UNF MIT O.R.
 CODO 45° ORIENTABLE MACHO ORFS – MACHO UNF CON O-RING

F1 ORFS


F2 UNF

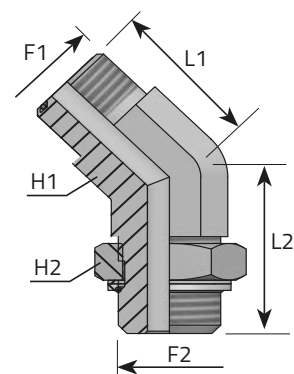

	Code	Thread		Dimensions				Pressure	
		F1	F2	H1	H2	L1	L2		
		in	in	mm	mm	mm	mm	Bar	Psi
	QMO06MOU04	9/16	7/16	14	14	16	30	420	6091
	QMO09MOU06	11/16	9/16	19	17	19	33	420	6091
	QMO11MOU08	13/16	3/4	22	22	20.5	36.5	420	6091
	QMO13MOU10	1	7/8	27	27	23.5	45	420	6091
	QMO14MOU12	1.3/16	1.1/16	30	32	26	50	420	6091
	QMO15MOU16	1.7/16	1.5/16	36	41	30	52.5	380	5511
	QMO21MOU20	1.11/16	1.5/8	41	50	32	53.5	280	4060
	QMO32MOU24	2	1.7/8	48	55	37	53.5	280	4060
	QMO06MOU06	9/16	9/16	14	17	16	33	420	6091
	QMO06MOU08	9/16	3/4	19	22	17.5	36.5	420	6091
	QMO09MOU04	11/16	7/16	19	14	19	31	420	6091
	QMO09MOU08	11/16	3/4	19	22	19	36.5	420	6091
	QMO09MOU10	11/16	7/8	22	27	20	45	420	6091
	QMO09MOU12	11/16	1.1/16	27	32	19.5	50	420	6091
	QMO11MOU06	13/16	9/16	22	17	20.5	32.5	420	6091
	QMO11MOU10	13/16	7/8	22	27	21	45	420	6091
	QMO11MOU12	13/16	1.1/16	27	32	21.5	50	420	6091

45° ADJUSTABLE ADAPTOR MALE ORFS – MALE UNF WITH O-RING (2)

GOMITO 45° MASCHIO ORFS MASCHIO ORIENTABILE UNF CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 45° MÂLE ORFS – MÂLE UNF
 ADAPTER 45° GSK-AG-ORFS / AG-UNF MIT O.R.
 CODO 45° ORIENTABLE MACHO ORFS – MACHO UNF CON O-RING

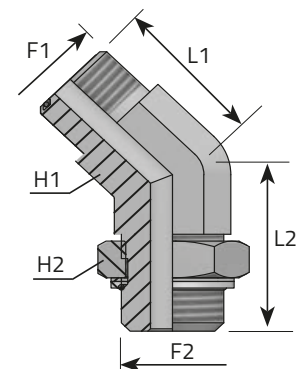

F1 ORFS

F2 UNF


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
QM013MOU08	1	3/4	27	22	23.5	40.5	420	6091
QM013MOU12	1	1.1/16	27	32	23.5	50	420	6091
QM014MOU08	1.3/16	3/4	30	22	26	40.5	420	6091
QM014MOU10	1.3/16	7/8	30	27	26	46	420	6091
QM014MOU16	1.3/16	1.5/16	33	41	29.5	52.5	380	5511
QM015MOU12	1.7/16	1.1/16	36	32	30	51.5	420	6091
QM015MOU20	1.7/16	1.5/8	41	50	32	53.5	280	4060
QM021MOU16	1.11/16	1.5/16	41	41	32	53.5	280	4060
QM021MOU24	1.11/16	1.7/8	48	55	35.5	53.5	280	4060
QM032MOU20	2	1.5/8	48	50	37	53.5	280	4060

RUN TEE MALE ORFS - ADJUSTABLE MALE BSPP WITH WITH O-RING (1)

RACCORDO A "T" MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
 ADAPTOR TÊR EVERSE MÂLE ORFS - MÂLE ORIENTABLE BSPP
 ADAPTER T-STUCK 2XAG-ORFS / AGR- F MIT O.R. UND HALTER
 ADAPTADOR EN L MACHO ORFS - MACHO ORIENTABLE BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilindrica

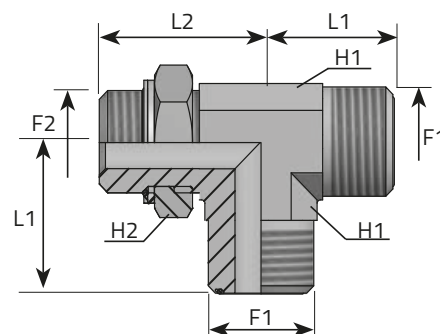


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
TM006MOG02B	9/16	1/8	14	14	21.5	30	350	5076
TM009MOG04B	11/16	1/4	19	19	25	37	315	4568
TM011MOG06B	13/16	3/8	22	22	28	38	250	3625
TM013MOG08B	1	1/2	27	27	33.5	48	250	3625
TM014MOG12B	1.3/16	3/4	30	36	37.5	51.5	250	3625
TM015MOG16B	1.7/16	1	36	41	41.5	58.5	200	2900
TM021MOG20B	1.11/16	1.1/4	41	50	44.5	60.5	200	2900
TM032MOG24B	2	1.1/2	48	55	49	64	160	2320
TM006MOG04B	9/16	1/4	14	19	21.5	35	315	4568
TM006MOG06B	9/16	3/8	19	22	23.5	38	250	3625
TM009MOG06B	11/16	3/8	19	22	25	38	250	3625
TM009MOG08B	11/16	1/2	22	27	28	48	250	3625
TM011MOG04B	13/16	1/4	22	19	28	37	315	4568
TM011MOG08B	13/16	1/2	22	27	30	48	250	3625
TM011MOG12B	13/16	3/4	27	36	31.5	51.5	250	3625
TM013MOG04B	1	1/4	27	19	33.5	42.5	315	4568
TM013MOG06B	1	3/8	27	22	33.5	42.5	250	3625
TM013MOG12B	1	3/4	27	36	33.5	51.5	250	3625

RUN TEE MALE ORFS - ADJUSTABLE MALE BSPP WITH WITH O-RING (2)

RACCORDO A "T" MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
 ADAPTOR TÉR EVERSÉ MÂLE ORFS - MÂLE ORIENTABLE BSPP
 ADAPTER T-STUCK 2XAG-ORFS / AGR- F MIT O.R. UND HALTER
 ADAPTADOR EN L MACHO ORFS - MACHO ORIENTABLE BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

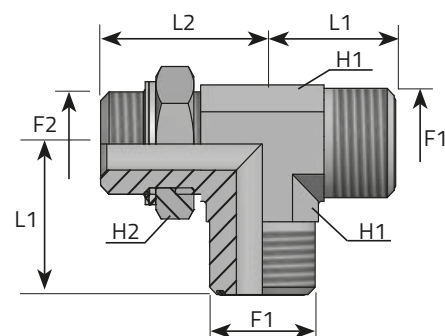


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
TM013MOG16B	1	1	33	41	37	58.5	200	2900
TM014MOG04B	1.3/16	1/4	30	19	37.5	43.5	315	4568
TM014MOG08B	1.3/16	1/2	30	27	37.5	49	250	3625
TM014MOG16B	1.3/16	1	33	41	42	54	200	2900
TM015MOG04B	1.7/16	1/4	36	19	41.5	52	315	4568
TM015MOG12B	1.7/16	3/4	36	36	41.5	57.5	250	3625
TM015MOG20B	1.7/16	1.1/4	41	50	44.5	60.5	200	2900
TM021MOG16B	1.11/16	1	41	41	44.5	60.5	200	2900
TM021MOG24B	1.11/16	1.1/2	48	55	48.5	64	160	2320

RUN TEE MALE ORFS - ADJUSTABLE METRIC MALE WITH O-RING

RACCORDO A "T" MASCHIO ORFS MASCHIO METRICO ORIENTABILE
 ADAPTOR TÉ RENVERSÉ MÂLE ORFS - MÂLE ORIENTABLE MÉTRIQUE
 ADAPTER T-STUCK 2XAG-ORFS/ AG-METRISCH MIT O.R. UND HALTER
 ADAPTADOR EN L MACHO ORFS - MACHO MÉTRICO ORIENTABLE

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

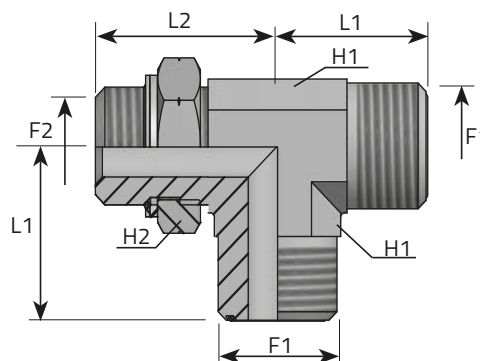


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	mm	mm	mm	mm	mm		
TM006MOM12RB	9/16	12X1.5	14	17	21.5	33	315	4568
TM009MOM14RB	11/16	14X1.5	19	19	25	35.5	315	4568
TM011MOM18RB	13/16	18X1.5	22	24	28	41	315	4568
TM013MOM22RB	1	22X1.5	27	27	33.5	49	250	3625
TM014MOM27RB	1.3/16	27X2	30	32	37.5	55.5	250	3625
TM015MOM33RB	1.7/16	33X2	36	41	41.5	59.5	160	2320
TM021MOM42RB	1.11/16	42X2	41	50	44.5	63	160	2320
TM032MOM48RB	2	48X2	48	55	49	68.5	160	2320
TM006MOM10RB	9/16	10X1	14	14	21.5	30	315	4568
TM009MOM16RB	11/16	16X1.5	19	22	25	37.5	315	4568
TM011MOM16RB	13/16	16X1.5	22	22	28	37.5	315	4568
TM011MOM22RB	13/16	22X1.5	27	27	31.5	49	250	3625
TM013MOM18RB	1	18X1.5	27	24	33.5	47.5	315	4568
TM013MOM27RB	1	27X2	27	32	33.5	55.5	250	3625
TM014MOM22RB	1.3/16	22X1.5	30	27	37.5	49.5	250	3625
TM014MOM33RB	1.3/16	33X2	33	41	38	59.5	160	2320
TM015MOM27RB	1.7/16	27X2	36	32	41.5	59.5	250	3625
TM015MOM42RB	1.7/16	42X2	41	50	44.5	63	160	2320
TM021MOM48RB	1.11/16	48X2	48	55	48.5	68.5	160	2320

RUN TEE MALE ORFS - MALE UNF WITH O-RING (1)

RACCORDO A "T" MASCHIO ORFS MASCHIO UNF CON O-RING AL BRACCIO
 RENVERSÉ MÂLE ORFS - MÂLE UNF AVEC O-RING
 ADAPTER T-STÜCK 2 X AG-ORFS / 1 X AG- UNF MIT O.R.
 ADAPTADOR EN L MACHO ORFS – MACHO UNF CON O-RING

F1 ORFS

F2 UNF

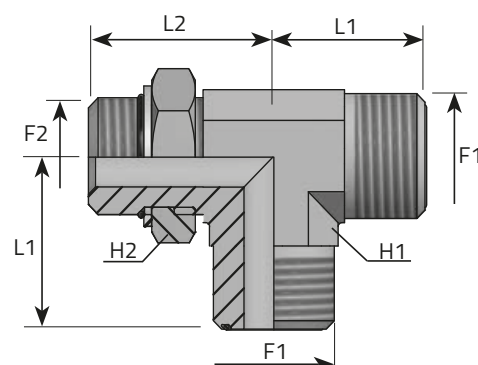


	Code	Thread		Dimensions				Pressure	
		F1	F2	H1	H2	L1	L2	Bar	Psi
		in	in	mm	mm	mm	mm		
	TM006MOU04B	9/16	7/16	14	14	21.5	32.5	420	6091
	TM009MOU06B	11/16	9/16	19	17	25	37	420	6091
	TM011MOU08B	13/16	3/4	22	22	28	40.5	420	6091
	TM013MOU10B	1	7/8	27	27	33.5	50	420	6091
	TM014MOU12B	1.3/16	1.1/16	30	32	37.5	55	420	6091
	TM015MOU16B	1.7/16	1.5/16	36	41	41.5	59.5	380	5511
	TM021MOU20B	1.11/16	1.5/8	41	50	44.5	62	280	4060
	TM032MOU24B	2	1.7/8	48	55	49	66	280	4060
	TM006MOU06B	9/16	9/16	14	17	21.5	34.5	420	6091
	TM006MOG08B	9/16	3/4	19	22	23.5	40.5	420	6091
	TM009MOU04B	11/16	7/16	19	14	25	35	420	6091
	TM009MOU08B	11/16	3/4	19	22	25	40.5	420	6091
	TM009MOU10B	11/16	7/8	22	27	28	50	420	6091
	TM009MOU12B	11/16	1.1/16	27	32	29.5	55	420	6091
	TM011MOU06B	13/16	9/16	22	17	28	37	420	6091
	TM011MOU10B	13/16	7/8	22	27	30	50	420	6091
	TM011MOU12B	13/16	1.1/16	27	32	31.5	55	420	6091

RUN TEE MALE ORFS - MALE UNF WITH O-RING (2)

RACCORDO A "T" MASCHIO ORFS MASCHIO UNF CON O-RING AL BRACCIO
 RENVERSÉ MÂLE ORFS - MÂLE UNF AVEC O-RING
 ADAPTER T-STÜCK 2 X AG-ORFS / 1 X AG- UNF MIT O.R.
 ADAPTADOR EN L MACHO ORFS – MACHO UNF CON O-RING

F1 ORFS

F2 UNF

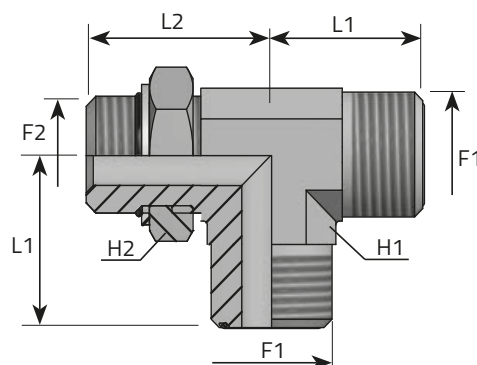


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
TM013MOU08B	1	3/4	27	22	33.5	46	420	6091
TM013MOU12B	1	1.1/16	27	32	33.5	55	420	6091
TM014MOU08B	1.3/16	3/4	30	22	37.5	47	420	6091
TM014MOU10B	1.3/16	7/8	30	27	37.5	51	420	6091
TM014MOU16B	1.3/16	1.5/16	33	41	38	59.5	380	5511
TM015MOU12B	1.7/16	1.1/16	36	32	41.5	59	420	6091
TM015MOU20B	1.7/16	1.5/8	41	50	44.5	62	280	4060
TM021MOU16B	1.11/16	1.5/16	41	41	44.5	62	280	4060
TM021MOU24B	1.11/16	1.7/8	48	55	48.5	66	280	4060
TM032MOU20B	2	1.5/8	48	50	49	66	280	4060

BRANCH TEE MALE ORFS - ADJUSTABLE MALE BSPP WITH O-RING (1)

RACCORDO A "T" MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
 ADAPTOR TÊ MÂLE ORFS - MÂLE ORIENTABLE
 ADAPTER T-STÜCK 2XAG-ORFS / 1 X AGR- F MIT O.R. UND HALTER
 ADAPTADOR TE MACHO ORFS - MACHO ORIENTABLE BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

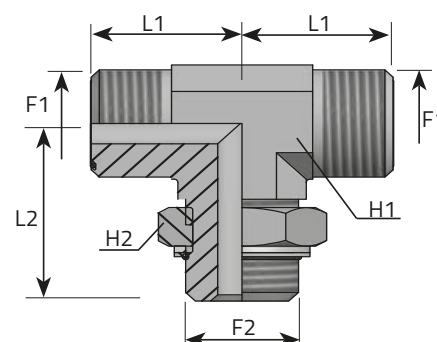


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
TM006MOG02P	9/16	1/8	14	14	21.5	30	350	5076
TM009MOG04P	11/16	1/4	19	19	25	37	315	4568
TM011MOG06P	13/16	3/8	22	22	28	38	250	3625
TM013MOG08P	1	1/2	27	27	33.5	48	250	3625
TM014MOG12P	1.3/16	3/4	30	36	37.5	51.5	250	3625
TM015MOG16P	1.7/16	1	36	41	41.5	58.5	200	2900
TM021MOG20P	1.11/16	1.1/4	41	50	44.5	60.5	200	2900
TM032MOG24P	2	1.1/2	48	55	49	64	160	2320
TM006MOG04P	9/16	1/4	14	19	21.5	35	315	4568
TM006MOG06P	9/16	3/8	19	22	23.5	38	250	3625
TM009MOG06P	11/16	3/8	19	22	25	38	250	3625
TM009MOG08P	11/16	1/2	22	27	28	48	250	3625
TM011MOG04P	13/16	1/4	22	19	28	37	315	4568
TM011MOG08P	13/16	1/2	22	27	30	48	250	3625
TM011MOG12P	13/16	3/4	27	36	31.5	51.5	250	3625
TM013MOG04P	1	1/4	27	19	33.5	42.5	315	4568
TM013MOG06P	1	3/8	27	22	33.5	42.5	250	3625
TM013MOG12P	1	3/4	27	36	33.5	51.5	250	3625

BRANCH TEE MALE ORFS - ADJUSTABLE MALE BSPP WITH O-RING (2)

RACCORDO A "T" MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
 ADAPTOR TÊ MÂLE ORFS - MÂLE ORIENTABLE
 ADAPTER T-STÜCK 2XAG-ORFS / 1 X AGR- F MIT O.R. UND HALTER
 ADAPTADOR TE MACHO ORFS - MACHO ORIENTABLE BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

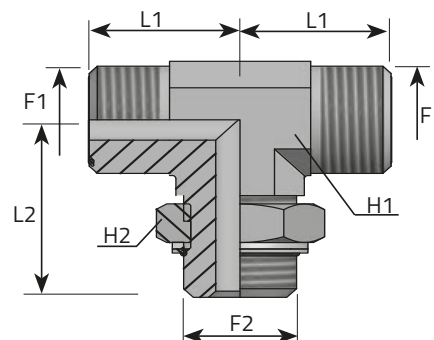


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
TMO13MOG16P	1	1	33	41	37	58.5	200	2900
TMO14MOG04P	1.3/16	1/4	30	19	37.5	43.5	315	4568
TMO14MOG08P	1.3/16	1/2	30	27	37.5	49	250	3625
TMO14MOG16P	1.3/16	1	33	41	42	54	200	2900
TMO15MOG04P	1.7/16	1/4	36	19	41.5	52	315	4568
TMO15MOG12P	1.7/16	3/4	36	36	41.5	57.5	250	3625
TMO15MOG20P	1.7/16	1.1/4	41	50	44.5	60.5	200	2900
TMO21MOG16P	1.11/16	1	41	41	44.5	60.5	200	2900
TMO21MOG24P	1.11/16	1.1/2	48	55	48.5	64	160	2320

BRANCH TEE MALE ORFS - ADJUSTABLE METRIC MALE WITH O-RING

"T" MASCHIO ORFS MASCHIO METRICO ORIENTABILE AL PIEDE
 ADAPTATEUR TÉ RENVERSÉ MÂLE ORFS - MÂLE MÉTRIQUE
 ADAPTER T-STÜCK 2XAG-ORSF / 1 XAG-METRISCH MIT O.R. UND HALTER
 ADAPTADOR MACHO ORFS - MACHO MÉTRICO ORIENTABLE

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

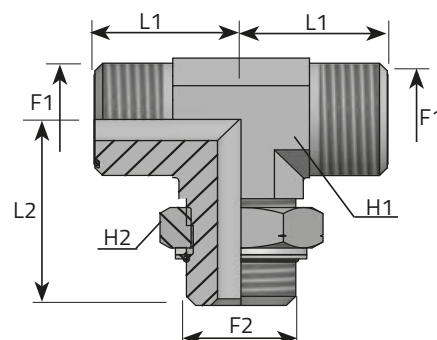


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	mm	mm	mm	mm	mm		
TM006MOM12RP	9/16	12X1.5	14	17	21.5	33	315	4568
TM009MOM14RP	11/16	14X1.5	19	19	25	35.5	315	4568
TM011MOM18RP	13/16	18X1.5	22	24	28	41	315	4568
TM013MOM22RP	1	22X1.5	27	27	33.5	49	250	3625
TM014MOM27RP	1.3/16	27X2	30	32	37.5	55.5	250	3625
TM015MOM33RP	1.7/16	33X2	36	41	41.5	59.5	160	2320
TM021MOM42RP	1.11/16	42X2	41	50	44.5	63	160	2320
TM032MOM48RP	2	48X2	48	55	49	68.5	160	2320
TM006MOM10RP	9/16	10X1	14	14	21.5	30	315	4568
TM009MOM16RP	11/16	16X1.5	19	22	25	37.5	315	4568
TM011MOM16RP	13/16	16X1.5	22	22	28	37.5	315	4568
TM011MOM22RP	13/16	22X1.5	27	27	31.5	49	250	3625
TM013MOM18RP	1	18X1.5	27	24	33.5	47.5	315	4568
TM013MOM27RP	1	27X2	27	32	33.5	55.5	250	3625
TM014MOM22RP	1.3/16	22X1.5	30	27	37.5	49.5	250	3625
TM014MOM33RP	1.3/16	33X2	33	41	38	59.5	160	2320
TM015MOM27RP	1.7/16	27X2	36	32	41.5	59.5	250	3625
TM015MOM42RP	1.7/16	42X2	41	50	44.5	63	160	2320
TM021MOM48RP	1.11/16	48X2	48	55	48.5	68.5	160	2320

ADJUSTABLE BRANCH TEE MALE ORFS - MALE UNF WITH O-RING (1)

RACCORDO A "T" MASCHIO ORFS MASCHIO UNF CON O-RING AL PIEDE
 RENVERSÉ MÂLE ORFS - MÂLE UNF AVEC O-RING
 ADAPTER T-STÜCK 2 X AG-ORFS / 1 X AG- UNF MIT O.R.
 ADAPTADOR EN L MACHO ORFS – MACHO UNF CON O-RING

F1 ORFS

F2 UNF

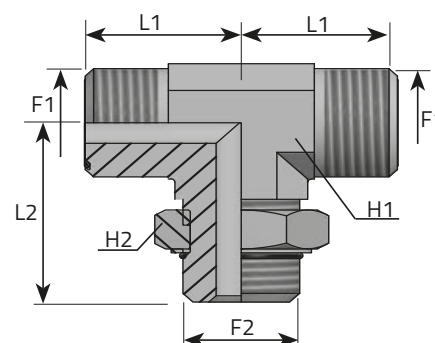


Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
	in	in	mm	mm	mm	mm		
TM006MOU04P	9/16	7/16	14	14	21.5	32.5	420	6091
TM009MOU06P	11/16	9/16	19	17	25	37	420	6091
TM011MOU08P	13/16	3/4	22	22	28	40.5	420	6091
TM013MOU10P	1	7/8	27	27	33.5	50	420	6091
TM014MOU12P	1.3/16	1.1/16	30	32	37.5	55	420	6091
TM015MOU16P	1.7/16	1.5/16	36	41	41.5	59.5	380	5511
TM021MOU20P	1.11/16	1.5/8	41	50	44.5	62	280	4060
TM032MOU24P	2	1.7/8	48	55	49	66	280	4060
TM006MOU06P	9/16	9/16	14	17	21.5	34.5	420	6091
TM006MOU08P	9/16	3/4	19	22	23.5	40.5	420	6091
TM009MOU04P	11/16	7/16	19	14	25	35	420	6091
TM009MOU08P	11/16	3/4	19	22	25	40.5	420	6091
TM009MOU10P	11/16	7/8	22	27	28	50	420	6091
TM009MOU12P	11/16	1.1/16	27	32	29.5	55	420	6091
TM011MOU06P	13/16	9/16	22	17	28	37	420	6091
TM011MOU10P	13/16	7/8	22	27	30	50	420	6091
TM011MOU12P	13/16	1.1/16	27	32	31.5	55	420	6091

ADJUSTABLE BRANCH TEE MALE ORFS - MALE UNF WITH O-RING (2)

RACCORDO A "T" MASCHIO ORFS MASCHIO UNF CON O-RING AL PIEDE
 RENVERSÉ MÂLE ORFS - MÂLE UNF AVEC O-RING
 ADAPTER T-STÜCK 2 X AG-ORFS / 1 X AG- UNF MIT O.R.
 ADAPTADOR EN L MACHO ORFS - MACHO UNF CON O-RING

F1 ORFS

F2 UNF

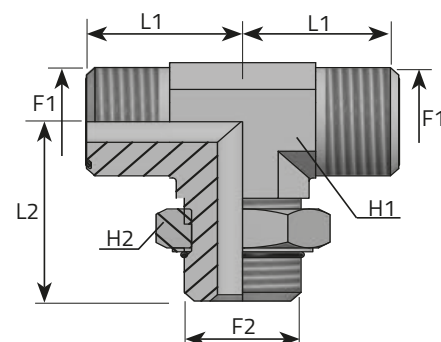


	Code	Thread		Dimensions				Pressure	
		F1	F2	H1	H2	L1	L1	Bar	Psi
		in	in	mm	mm	mm	mm		
	TM013MOU08P	1	3/4	27	22	33.5	46	420	6091
	TM013MOU12P	1	1.1/16	27	32	33.5	55	420	6091
	TM014MOU08P	1.3/16	3/4	30	22	37.5	47	420	6091
	TM014MOU10P	1.3/16	7/8	30	27	37.5	51	420	6091
	TM014MOU16P	1.3/16	1.5/16	33	41	38	59.5	380	5511
	TM015MOU12P	1.7/16	1.1/16	36	32	41.5	59	420	6091
	TM015MOU20P	1.7/16	1.5/8	41	50	44.5	62	280	4060
	TM021MOU16P	1.11/16	1.5/16	41	41	44.5	62	280	4060
	TM021MOU24P	1.11/16	1.7/8	48	55	48.5	66	280	4060
	TM032MOU20P	2	1.5/8	48	50	49	66	280	4060

90° ADAPTOR FEMALE ORFS – ADJUSTABLE MALE BSPP WITH O-RING

GOMITO A 90° FEMMINA ORFS MASCHIO GAS CILINDRICO ORIENTABILE
 ADAPTATEUR COUDE 90° FEMELLE ORFS – MÂLE ORIENTABLE BSPP
 ADAPTER 90° IG-ORFS / AG-BSPP MIT O.R UND HALTER
 CODO 90° HEMBRA ORFS – MACHO ORIENTABLE BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilindrica

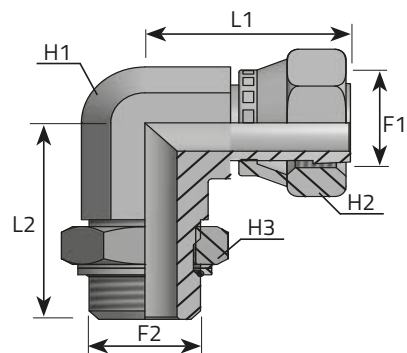


Code	Thread		Dimensions						Pressure	
	F1	F2	H1	H2	H3	L1	L2		Bar	Psi
	in	in	mm	mm	mm	mm	mm			
LFG006MOG02	9/16	1/8	14	17	14	26.5	30		350	5076
LFG009MOG04	11/16	1/4	19	22	19	29	37		315	4568
LFG011MOG06	13/16	3/8	22	24	22	38	38		250	3625
LFG013MOG08	1	1/2	27	30	27	41	48		250	3625
LFG014MOG12	1.3/16	3/4	30	36	36	46.5	51.5		250	3625
LFG015MOG16	1.7/16	1	36	41	41	53.5	58.5		200	2900
LFG021MOG20	1.11/16	1.1/4	41	50	50	58	60.5		200	2900
LFG032MOG24	2	1.1/2	48	60	55	61	64		160	2320

90° ADAPTOR FEMALE ORFS – ADJUSTABLE METRIC MALE WITH O-RING

GOMITO A 90° FEMMINA ORFS MASCHIO METRICO ORIENTABILE
 ADAPTATEUR COUDE 90° FEMELLE ORFS – MÂLE ORIENTABLE MÉTRIQUE
 ADAPTER 90° IG-ORFS / AG-METRISH MIT O.R UND HALTER
 CODO 90° HEMBRA ORFS – MACHO ORIENTABLE MÉTRICO

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

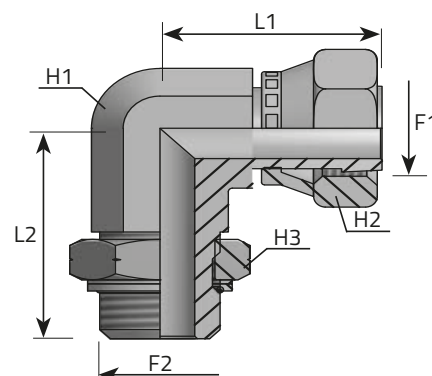


Code	Thread		Dimensions					Pressure	
	F1	F2	H1	H2	H3	L1	L2	Bar	Psi
	in	mm	mm	mm	mm	mm	mm		
LFG006MOM12R	9/16	12X1.5	14	17	17	26.5	33	315	4568
LFG009MOM14R	11/16	14X1.5	19	22	19	29	35.5	315	4568
LFG011MOM18R	13/16	18X1.5	22	24	24	38	41	315	4568
LFG013MOM22R	1	22X1.5	27	30	27	41	49	250	3625
LFG014MOM27R	1.3/16	27X2	30	36	32	46.5	55.5	250	3625
LFG015MOM33R	1.7/16	33X2	36	41	41	53.5	59.5	160	2320
LFG021MOM42R	1.11/16	42X2	41	50	50	58	63	160	2320
LFG032MOM48R	2	48X2	48	60	55	61	68.5	160	2320

90° ADAPTOR FEMALE ORFS – MALE UNF WITH O-RING

GOMITO A 90° FEMMINA ORFS MASCHIO UNF CON O-RING
 ADAPTATEUR COUDE 90° FEMELLE ORFS – MÂLE UNF AVEC O-RING
 ADAPTER 90° IG-ORFS / AG-UNF MIT O.R.
 CODO 90° HEMBRA ORFS – MACHO UNF CON O-RING

F1 ORFS


F2 UNF

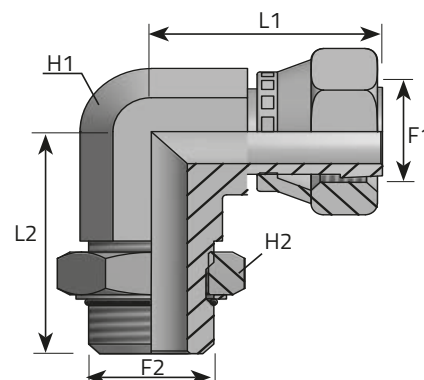

Code	Thread		Dimensions						Pressure	
	F1	F2	H1	H2	H3	L1	L2		Bar	Psi
	in	in	mm	mm	mm	mm	mm			
LFG006MOU04	9/16	7/16	14	17	14	26.5	32.5		420	6091
LFG009MOU06	11/16	9/16	19	22	17	29	37		420	6091
LFG011MOU08	13/16	3/4	22	24	22	38	40.5		420	6091
LFG013MOU10	1	7/8	27	30	27	41	50		420	6091
LFG014MOU12	1.3/16	1.1/16	30	36	32	46.5	55		420	6091
LFG015MOU16	1.7/16	1.5/16	36	41	41	53.5	59.5		380	5511
LFG021MOU20	1.11/16	1.5/8	41	50	50	58	62		280	4060
LFG032MOU24	2	1.7/8	48	60	55	61	66		280	4060

MALE PLUG UNF/UN-2A

TAPPO MASCHIO FILETTO UNF/UN-2A
BOUCHON MÂLE UNF/UN-2A
VERSCHLUSSKAPPE - UNF/UN-2A
TAPÓN MACHO UNF/UN



F1 UNF

Code	Thread	Dimensions		Pressure	
		H1	L1	Bar	Psi
	F1				
	in	mm	mm		
ATM006	9/16	17	16.5	630	9136
ATM009	11/16	19	19	630	9136
ATM011	13/16	22	22	630	9136
ATM013	1	27	26	420	6091
ATM014	1.3/16	32	27.5	420	6091
ATM015	1.7/16	41	28	420	6091
ATM021	1.11/16	46	28	280	4060
ATM032	2	55	28	280	4060

SWIVEL FEMALE PLUG UNF/UN-2B


TAPPO FEMMINA CON DADO GIREVOLE FILETTO UNF/UN-2B

BOUCHON FEMELLE TOURNANTE UNF/UN-2B

VERSCHLUSSKAPPE UNF/UN-2B

TAPÓN HEMBRA GIRATORIA UNF/UN-2B

F1 UNF




Code	Thread	Dimensions			Pressure	
		H	L1	L2	Bar	Psi
	F1					
	in	mm	mm	mm		
ATFG006	9/16	17	16.5	8.5	630	9136
ATFG009	11/16	22	18	9.5	630	9136
ATFG011	13/16	24	22	12	630	9136
ATFG013	1	30	24.5	12	420	6091
ATFG014	1.3/16	36	27	13.5	420	6091
ATFG015	1.7/16	41	28.5	15	420	6091
ATFG021	1.11/16	50	28.5	15	280	4060
ATFG032	2	60	28.5	15	280	4060

NOTES

[illegible]

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



ORFS J1453 0-2020 EU

Data reported in this catalogue are not binding.

Vitillo S.p.a. reserves the right to change specifications without notice.

I dati riportati nella seguente pubblicazione non sono vincolanti.

Vitillo S.p.a. si riserva di apportare modifiche senza preavviso.

Les données exposées dans ce catalogue ne sont pas contraignantes.

Vitillo s.p.a se réserve le droit d'apporter des modifications sans aucun préavis.

Die vorliegenden Angaben sind nicht bindend.

Vitillo S.p.a. behält sich technische Änderungen vor ohne Mitteilung.

Los datos referidos en la presente publicación son indicativos.

Vitillo S.p.a. se reserva el derecho de modificar las especificaciones sin aviso previo.